

SPECIFICATION FOR APPROVAL

| | | | |
|---------------------|-----------------|--------|---|
| Product Name | Linear Adaptors | Page | 1 |
| Superworld Part No: | DM Series | Rev No | A |

Features

- 1.Ergonomic Design
- 2.Region Specific Modeles
- 3.High Qquality Control
- 4.AC/AC , AC/DC unregulated models
- 5.Type Wall - Mount
- 6.Electrical Characteristics : AT 25 deg
- 7.Operation Temperature : 0 deg ~ 40 deg
- 8.Storage Temperature : - 40 deg ~ 80 deg
- 9.Power AC~AC 20.0VA to 72.0VA
AC~DC 20.0VA to 36.0VA



Safetys



- 1.regions: Japan - PSE,USA - UL/CUL,TUV/EMC , CE
- 2.Standards:UL1310,CSA22.2,EN50082 , EN50081 ,EN61000

Applications

- 1.Low Energy AC/DC Power Supply .
- 2.IT Equipment .
- 3.Chargers .

| Input (Region Specific) | |
|--------------------------|---------------------|
| America | 120VAC / 60Hz |
| Europe | 230VAC / 50Hz |
| Australia | 220 ~ 240VAC / 50Hz |
| Japan | 100VAC / 50/60Hz |
| China | 220VAC / 50Hz |


Demensions for reference :

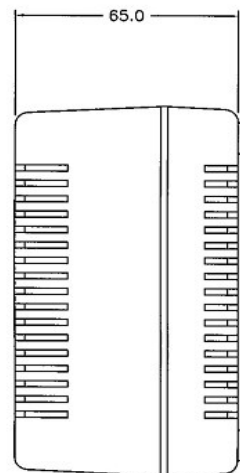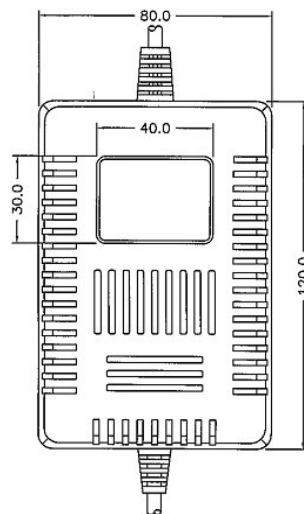

SUPERWORLD ELECTRONICS (S) PTE LTD

SPECIFICATION FOR APPROVAL

| | | | |
|---------------------|-----------------|--------|---|
| Product Name | Linear Adaptors | Page | 2 |
| Superworld Part No: | DM Series | Rev No | A |

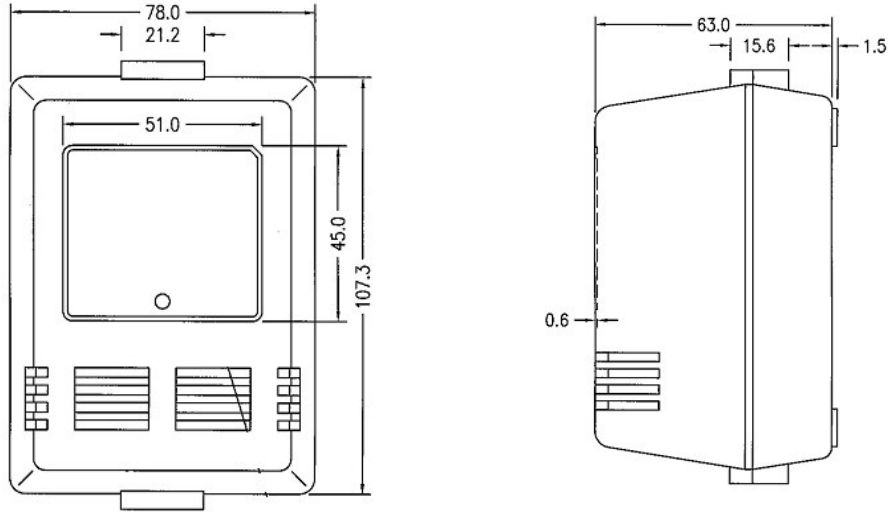

Electrical Characteristics :

| MODEL | OUTPUT | | | SAFETY APPROVAL | |
|----------|-------------|--------------|------------|-----------------|-------|
| | VOLTAGE (V) | CURRENT (mA) | POWER (VA) | AC | DC |
| DM0902A5 | 9.0 | 2500 | 22.500 | 4 | 4 |
| DM0903A0 | | 3000 | 27.000 | 4 | 4 |
| DM0904A0 | | 4000 | 36.000 | 4 | 4 |
| DM1202A0 | 12.0 | 2000 | 24.000 | 4 | 4 |
| DM1202A5 | | 2500 | 30.000 | 4 | A B 4 |
| DM1203A0 | | 3000 | 36.000 | 4 | 4 |
| DM1203A5 | 12.5 | 3500 | 42.000 | 4 | 4 |
| DM1253A0 | | 3000 | 37.500 | 4 | 4 |
| DM1351A8 | | 1800 | 24.300 | 4 | A B 4 |
| DM1352A5 | 13.5 | 2500 | 33.750 | 4 | 4 |
| DM1452A5 | | 2500 | 36.250 | 4 | 4 |
| DM1502A5 | 15.0 | 2500 | 37.500 | 4 | 4 |
| DM1504A0 | | 4000 | 60.000 | 4 | 4 |
| DM1601A5 | 16.0 | 1500 | 24.000 | 4 | 4 |
| DM1602A0 | | 2000 | 32.000 | 4 | 4 |
| DM1602A5 | | 2500 | 40.000 | 4 | 4 |
| DM1603A0 | | 3000 | 48.000 | 4 | 4 |
| DM1604A0 | | 4000 | 64.000 | 4 | 4 |
| DM1653A5 | 16.5 | 3500 | 57.750 | 4 | 4 |
| DM1802A2 | 18.0 | 2200 | 39.600 | 4 | 4 |
| DM1803A0 | | 3000 | 54.000 | 4 | 4 |
| DM2001A0 | 20.0 | 1000 | 20.000 | 4 | 4 |
| DM2001A5 | | 1500 | 30.000 | 4 | 4 |
| DM2002A0 | | 2000 | 40.000 | 4 | 4 |
| DM2003A0 | | 3000 | 60.000 | 4 | 4 |
| DM2401A5 | 24.0 | 1500 | 36.000 | 4 | A C 4 |
| DM2402A0 | | 2000 | 48.000 | 4 | 4 |
| DM2402A5 | | 2500 | 60.000 | 4 | 4 |
| DM2403A0 | | 3000 | 72.000 | 4 | 4 |

UL : A CSA : B CUL : C CE : 4



SUPERWORLD ELECTRONICS (S) PTE LTD

