
- 1. Part No. Expression:
- <u>PIC0503H1R0MF</u>


(a) (b) (C) (d) (e)(f) a) Series Code b) Dimension Code

c) Type Code

- d) Inductance Code
- e) Tolerance Code
- f) RoHS Compliant

## 2. Configuration & Dimensions:





Recommended PC Board Pattern

Note:

- The above PCB layout is for reference only. 1.
- 2. Solder paste thickness of 0.12mm and above is recommended.
- Marking : Top row Inductance code, Bottom row Year/World week. 3.

							Unit. mm
А	В	С	D	E	L	G	Н
5.7±0.3	5.2±0.2	2.8±0.2	1.1±0.3	1.5±0.2	6.5 Ref.	2.5 Ref.	1.8 Ref.

# 3. Schematic:



4. Material List:



NOTE: Specifications subject to change without notice. Please check our website for latest information.



I Init: mm

## 5. General Specification:

(a)Operating Temp. : -40°C to +125°C (Including self - temperature rise).

(b) Storage Temp. : -40°C to +125°C (on board).

- (c) Heat Rated Current (Irms) will cause the coil temperature rise approximately  $\Delta t$  of 40°C.
- (d)Saturation Current (Isat) will cause L0 to drop approximately 30%.
- (e)Part Temperature (Ambient+Temp. Rise). : Should not exceed 125°C under worst case operating conditions.
- (f) Humidity Range. : 85 ± 2% RH.
- (g) Storage Condition (Component in its packaging).
  - i) Temperature: Less than 40°C.
  - ii) Humidity: 60% RH.

NOTE: Specifications subject to change without notice. Please check our website for latest information.

SUPERWORLD ELECTRONICS (S) PTE LTD

# 6. Electrical Characteristics:

	Inductance	Test	l rms	l sat	DCR	DCR
Part Number	L0 (uH) @ 0 A	Frequency (Hz)	(А) Тур.	(А) Тур.	(mΩ) Typ.	(mΩ) Max.
PIC0503HR15YF	0.15	1.0V/100K	18.0	30.0	2.30	2.70
PIC0503HR20YF	0.20	1.0V/100K	16.0	25.0	2.60	3.20
PIC0503HR25MF	0.25	1.0V/100K	15.0	20.0	3.70	4.10
PIC0503HR33MF	0.33	1.0V/100K	14.0	18.0	4.30	5.00
PIC0503HR47MF	0.47	1.0V/100K	12.0	16.0	6.40	7.40
PIC0503HR56MF	0.56	1.0V/100K	10.0	15.0	8.00	10.0
PIC0503HR68MF	0.68	1.0V/100K	8.50	14.0	10.0	12.0
PIC0503HR82MF	0.82	1.0V/100K	8.00	12.5	11.5	13.0
PIC0503H1R0MF	1.00	1.0V/100K	7.00	11.0	13.0	14.0
PIC0503H1R2MF	1.20	1.0V/100K	6.50	11.0	14.0	16.0
PIC0503H1R5MF	1.50	1.0V/100K	6.00	10.0	16.0	25.0
PIC0503H2R2MF	2.20	1.0V/100K	5.50	9.00	25.0	35.0
PIC0503H3R3MF	3.30	1.0V/100K	5.00	8.00	32.0	38.0
PIC0503H4R7MF	4.70	1.0V/100K	4.60	6.00	50.0	53.0
PIC0503H5R6MF	5.60	1.0V/100K	4.25	4.50	55.0	63.0
PIC0503H6R8MF	6.80	1.0V/100K	4.00	4.30	68.0	76.2
PIC0503H100MF	10.0	1.0V/100K	2.75	3.50	110	128
PIC0503H150MF	15.0	1.0V/100K	2.10	2.60	165	190
PIC0503H220MF	22.0	1.0V/100K	1.90	1.70	220	250


Tolerance code : Y =  $\pm 30\%$ ; M =  $\pm 20\%$ 

Notes:

1) Isat Typ. and Irms Typ. value is derived based from accounting the upper limit tolerance into the inductance value.

NOTE: Specifications subject to change without notice. Please check our website for latest information. SUPERWORLD ELECTRONICS (S) PTE LTD


# 7. Characteristics Curves:

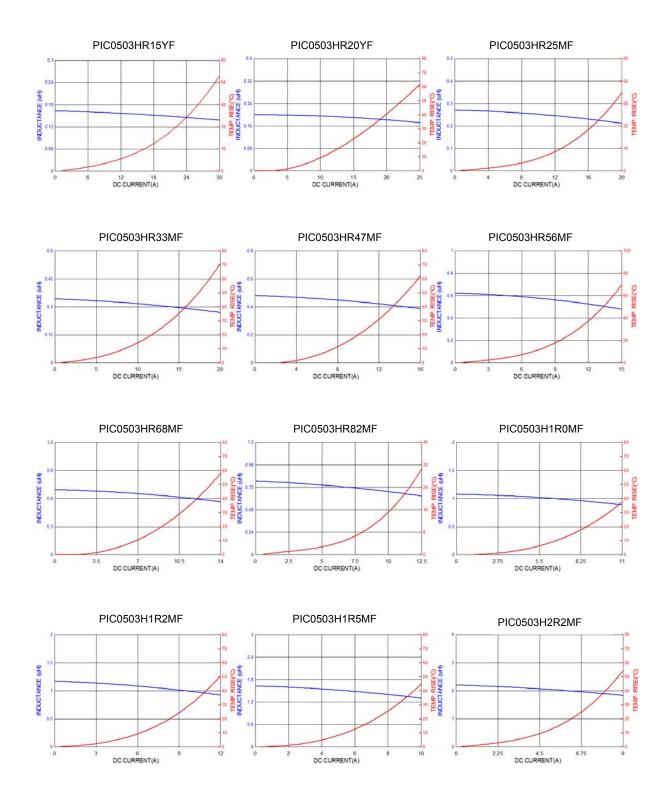



NOTE: Specifications subject to change without notice. Please check our website for latest information.

0

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

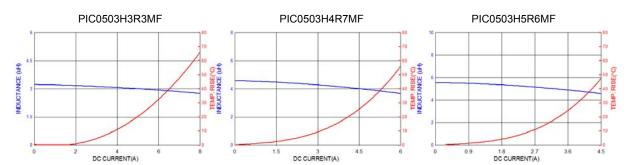

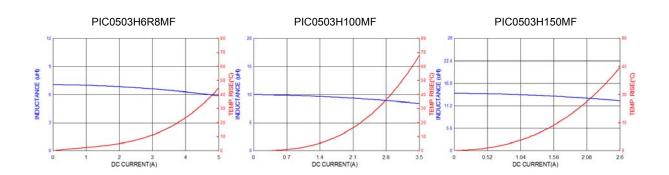



NOTE: Specifications subject to change without notice. Please check our website for latest information.

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司 Ρ5

### 8. Soldering:

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air.

#### 8-1 Solder Re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

#### 8-2 Soldering Iron (Figure 2):

Products attachment with soldering iron is discouraged due to the inherent process control limitations.

In the event that a soldering iron must be employed the following precautions are recommended. Note :

- a) Preheat circuit and products to 150°C.
- b) 355°C tip temperature (Max.)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (Max.)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4~5 secs.




Fig.1





Fig.2

NOTE: Specifications subject to change without notice. Please check our website for latest information.


SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

# 9. Packaging Information:

### 9-1 Reel Dimension

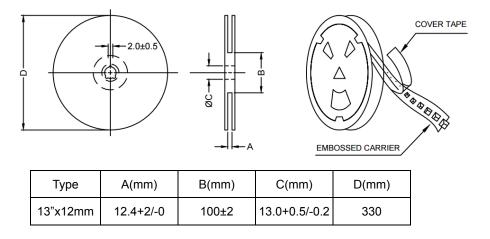

### 9-2 Tape Dimension

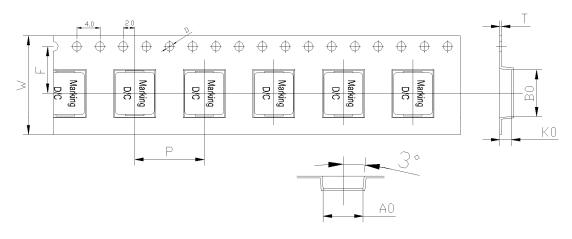


Series	Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	t(mm)	D(mm)
PIC	0503	6.2±0.1	5.5±0.1	3.3±0.1	8.0±0.1	12.0±0.3	5.5±0.1	0.35±0.05	1.5±0.1

### 9-3 Packaging Quantity

PIC	0503		
Chip / Reel	2,000		
Inner box	4,000		
Carton	16,000		

NOTE: Specifications subject to change without notice. Please check our website for latest information.

### 9-4 Tearing Off Force



The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min	
5~35	45~85	860~1060	300	

## **Application Notice:**

1. Storage Conditions:

To maintain the solderability of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.

#### 2. Transportation:

a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.

- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information. SUPERWORLD ELECTRONICS (S) PTE LTD