


POWER TRANSFORMER

14A-2.5-16 (F) SERIES


1. CONFIGURATION & DIMENSIONS :

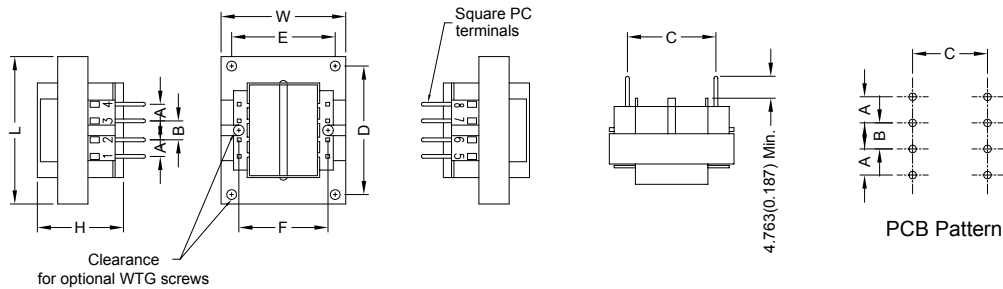

UNIT : mm (inch)

VA	gram	L	W	H	A	B	C	D	E	F	Dim Pin
2.500	113.4	41.28	33.33	28.58	5.08	6.35	25.4	-	-	26.98	0.64 SQ
-	-	(1.625)	(1.312)	(1.125)	(0.200)	(0.250)	(1.000)	-	-	(1.062)	(0.025)SQ

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|------------------------------|
| a. Primary Voltage | AC 115/230 V 50/60 Hz . |
| b. No Load Primary Current | |
| Input AC 115V 60Hz . | Less Than 25mA . |
| Input AC 230V 50Hz . | Less Than 30mA . |
| c. Secondary Voltage (±5%) | Series AC 21.40V . |
| | Parallel AC 10.70V . |
| d. Secondary Load Current | Series 150mA . |
| | Parallel 300mA . |
| e. Full Load Primary Current | |
| Input AC 115V 60Hz . | Less Than 45mA . |
| Input AC 230V 50Hz . | Less Than 50mA . |
| f. Full Load Secondary Voltage (±5%) | Series 16.00V . C.T. |
| | Parallel 8.00V . |
| g. DC Resistance | |
| Pin 1-2 | Primary = 800 Ohm . |
| Pin 3-4 | = 1030 Ohm . |
| Pin 5-6 | Secondary = - Ohm . |
| Pin 7-8 | = - Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 3750V 50Hz 1 Minutes . |
| j. Temperature Rise | Less Than 75 Deg C . |
| k. Core Size | EI-41 x 10.40 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1