

## 1. Part No. Expression:

| PIFC | <u>0403</u> | <u>3 L R</u> | <u>R 9 0 M N</u> | a) Series Code    | d) Inductance Code          |
|------|-------------|--------------|------------------|-------------------|-----------------------------|
| (a)  | (b)         | (c)          | (d) (e)(f)       | b) Dimension Code | e) Tolerance Code           |
|      |             |              |                  | c) Type Code      | f) Internal Controlled Code |

## 2. Configuration & Dimensions:

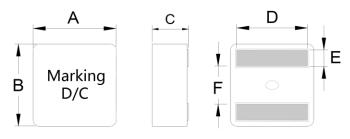



Recommended PC Board Pattern

Note:

- The above PCB layout is for reference only.
  Solder paste thickness of 0.12mm and above is recommended.
  Marking: Top row- Inductance code, Bottom row-YYWW


Unit: mm

| A         | В         | С        | D        | E        | F         | L        | G        | н        |
|-----------|-----------|----------|----------|----------|-----------|----------|----------|----------|
| 4.10±0.25 | 4.10±0.25 | 2.80±0.2 | 3.40±0.3 | 0.88±0.2 | 1.60±0.25 | 3.4 Ref. | 1.4 Ref. | 3.8 Ref. |

## 3. Schematic:



## 4. Material List:



(a) Core

Wire (b)

- Solder (C)
- (d) Ink

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

NOTE: Specifications subject to change without notice. Please check our website for latest information.

### 5. General Specification:

- (a) Reliability test for part meets AEC-Q200 standard.
- (b) Operating Temp. : -55°C to +155°C (including self-temperature rise).
- (c) Storage Temp.: -55°C to +155°C (on board).
- (d) Heat Rated Current (Irms) will cause the coil temperature rise approximately ∆t of 20°C & 40°C (see following table).
- (e) Saturation Current (Isat 1) will cause L0 to drop approximately 10%.

Saturation Current (Isat 2) will cause L0 to drop approximately 20%.

Saturation Current (Isat 3) will cause L0 to drop approximately 30%.

- (f) Part Temperature (Ambient + Temp. Rise): Should not exceed 155°C under worst case operating conditions.
- (g) Rated Operating Voltage. : (across inductor) 15V Ref.
- (h) Storage condition (component in its packaging)
  - i) Temperature: Less than 40°C
  - ii) Humidity: 60% RH

# 6. Electrical Characteristics:

|                 | Inductance   | Test<br>Frequency<br>(Hz) | I rms(A) Typ. |       | I sat(A) |     |      | DCR  | DCR  |      |
|-----------------|--------------|---------------------------|---------------|-------|----------|-----|------|------|------|------|
| Part Number     | (uH)<br>±20% |                           | @20°C         | @40°C | Тур.     |     | Max. | (mΩ) | (mΩ) |      |
|                 | @ 0 A        |                           |               |       | 1        | 2   | 3    | 3    | Тур. | Max. |
| PIFQ0403LRR90MN | 0.90         | 0.1V/100K                 | 8.2           | 11.2  | 5.2      | 7.0 | 10.0 | 9.0  | 9.1  | 10.1 |
| PIFQ0403LR1R0MN | 1.00         | 0.1V/100K                 | 8.0           | 11.0  | 5.0      | 6.8 | 9.8  | 9.2  | 9.1  | 10.1 |

Notes:


1) Isat Typ. and Irms Typ. value is derived based from accounting the upper limit tolerance into the inductance value.

2) At all times, the current supplied to the product should not exceed Isat Max. value

NOTE: Specifications subject to change without notice. Please check our website for latest information.

**SUPERWORLD ELECTRONICS (S) PTE LTD** 西普爾電子(新)私营有限公司



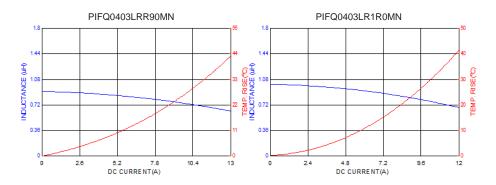

NOTE: Specifications subject to change without notice. Please check our website for latest information.

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

### 8. Soldering:

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air.

#### 8-1 Solder Re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

#### 8-2 Soldering Iron (Figure 2):

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- a) Preheat circuit and products to 150°C.
- b) 355°C tip temperature (Max.)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (Max.)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4~5 secs.




Fig.1




Fig.2


NOTE: Specifications subject to change without notice. Please check our website for latest information.

Proprietary and Confidential Document of Superworld


SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

# 9. Packaging Information:

### 9-1 Reel Dimension

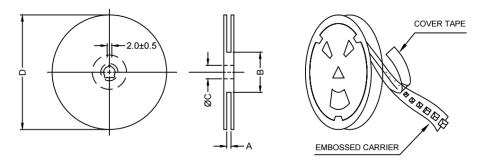

| Туре     | A(mm)     | B(mm) | C(mm)         | D(mm) |
|----------|-----------|-------|---------------|-------|
| 13"x12mm | 12.4+2/-0 | 100±2 | 13.0+0.5/-0.2 | 330   |

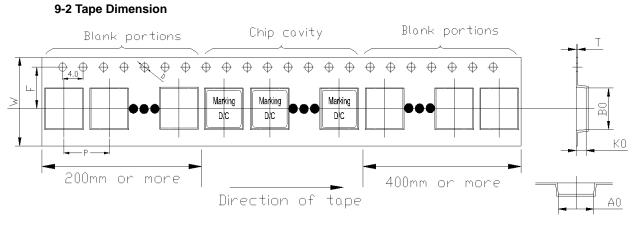


| Series | Size | Ao(mm)   | Bo(mm)   | Ko(mm)   | P(mm)    | W(mm)     | F(mm)    | T(mm)    | D(mm)    |
|--------|------|----------|----------|----------|----------|-----------|----------|----------|----------|
| PIFQ   | 0403 | 4.40±0.1 | 4.40±0.1 | 3.30±0.1 | 8.00±0.1 | 12.00±0.3 | 5.50±0.1 | 0.35±0.1 | 1.50±0.1 |

### 9-3 Packaging Quantity

| PIFQ        | 0403LR |
|-------------|--------|
| Chip / Reel | 2000   |
| Inner box   | 4000   |
| Carton      | 16000  |

NOTE: Specifications subject to change without notice. Please check our website for latest information.

### 9-4 Tearing Off Force



The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions

| Room Temp.<br>(℃) | Room<br>Humidity<br>(%) | Room atm<br>(hPa) | Tearing<br>Speed<br>mm/min |
|-------------------|-------------------------|-------------------|----------------------------|
| 5~35              | 45~85                   | 860~1060          | 290~310                    |

# **Application Notice:**

1. Storage Conditions:

To maintain the solderabililty of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.

#### 2. Transportation:

- a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.