



### 1. CONFIGURATION & DIMENSIONS :

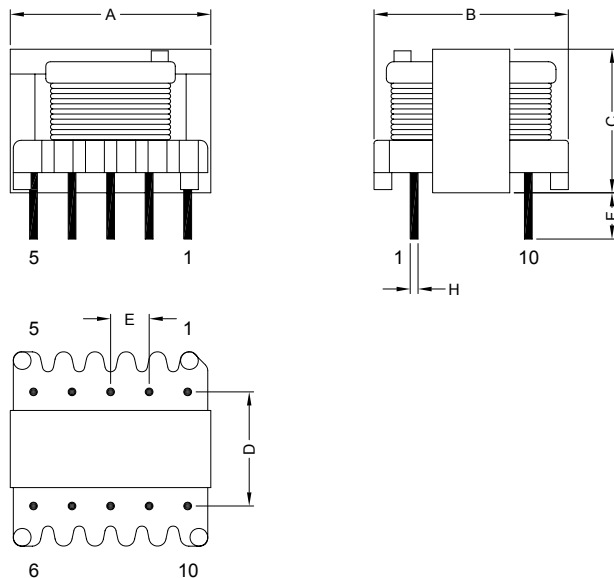

Unit:m/m

| A          | B          | C         | D         | E         | F         | H          |
|------------|------------|-----------|-----------|-----------|-----------|------------|
| 13.00±1.00 | 12.50±0.50 | 9.50±1.00 | 7.50±0.50 | 2.50±0.50 | 3.60±1.00 | ∅0.60±0.05 |

### 2. SCHEMATIC :

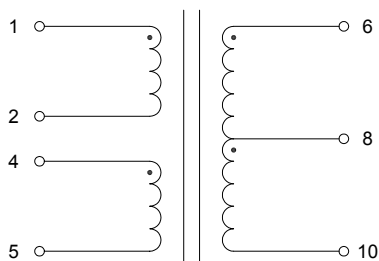

### 3. SCHEMATIC :

- Bobbin : Phenolic
- Core : EI12.5
- Wire : Polyurethane (UEW)
- Tape : Polyester Film
- Varnish : Synthite AC-43



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**

#### 4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

#### 5. ELECTRICAL CHARACTERISTICS :

| Part No.       | Impedance<br>( Z )             | Conditions       | Test<br>Frequency | DCR<br>@ 25°C            |
|----------------|--------------------------------|------------------|-------------------|--------------------------|
| SEIB2VTF-50724 | Z : (1-5) tie: 2.4 = 10KΩ±10%  | Load 6-10 = 10KΩ | 1KHz 1V           | (1-5)tie: 2.4 = 700Ω±10% |
|                | Z : (6-10) tie: 2.4 = 10KΩ±10% | Load 1-5 = 10KΩ  | 1KHz 1V           | (6-10) = 650Ω±10%        |



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**