


1. Part No. Expression:

STXQ555506MPA2

(a) (b) (c) (d)

- a) Series Code
- b) Internal Code
- c) Dimension Code
- d) Qi Design Type Code

2. Configuration & Dimensions: (Unit: mm)

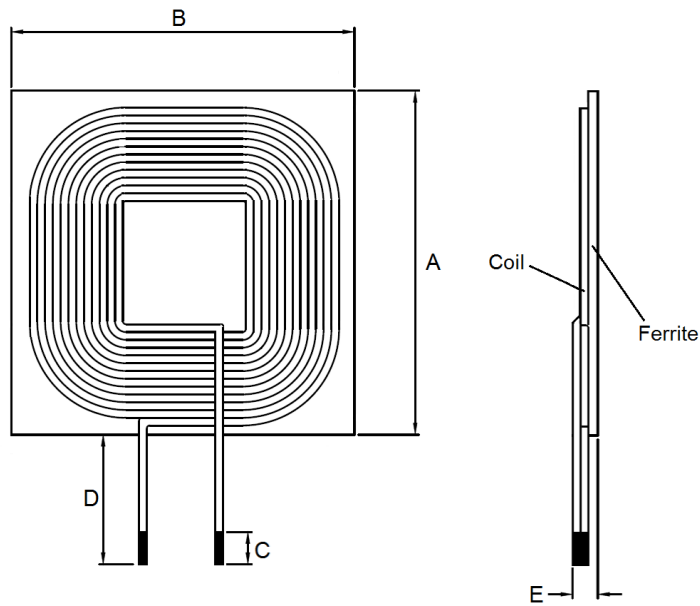

A	B	C	D	E
55.0±1.0	55.0±1.0	5.0 Ref	47.0 Ref	4.5 Max

3. Schematic:



NOTE: Specifications subject to change without notice. Please check our website for latest information.


4. Electrical Characteristics:

Inductance (uH)	Test Frequency (Hz)	DCR (mΩ)	I _{rms} (mA)
10±10%	1V/100K	80 Max	6000 Max

5. General Specifications:

- a) Operating Temp: -40°C ~ +125°C
- b) Storage Temp: -40°C ~ +125°C (packaging).
- c) I_{rms}: Based on temp. rise up to 40°C Max.
- d) Power Rating: 15W
- e) Compatible to Qi standard MP-A2 design.

6. Material List:

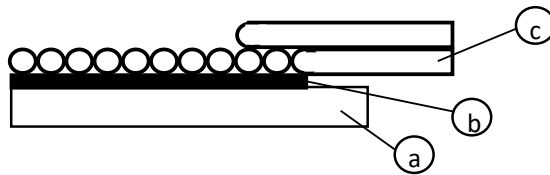

- a) Ferrite Sheet (MnZn)
- b) Adhesive
- c) Wire

NOTE: Specifications subject to change without notice. Please check our website for latest information.