

1. PART NO. EXPRESSION :

R C C 1 0 0 8 1 0 1 M Z F

(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 101 = 100uH

(d) Tolerance code : K = ±10%, M = ±20%

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

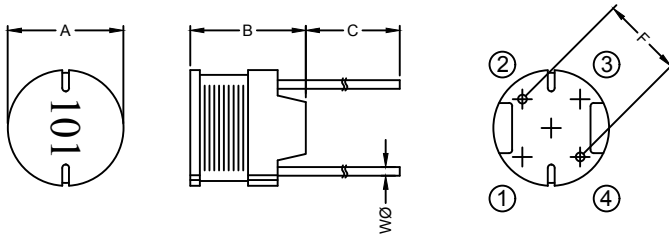


Unit:m/m

A	B	C	F	WØ
10.00±0.5	8.00±0.5	15.00±3.0	6.4±0.5	0.65±0.10

3. SCHEMATIC :



4. MATERIALS :



(a) CORE

(b) WIRE

(c) LEAD

(d) INK

5. GENERAL SPECIFICATION :

- a) $\Delta L/L0A$: 10% MAX. AT RATED CURRENT
- b) TEMP. RISE : 40°C MAX. AT RATED CURRENT
- c) STORAGE TEMP.: -40°C TO 125°C
- d) OPERATING TEMP.: -40°C TO 85°C



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.09.2016




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC (Ω) Max.	IDC (A) Max.
RCC1008100MZF	10 \pm 20%	1V/2.52M	0.027	4.50
RCC1008120MZF	12 \pm 20%	1V/2.52M	0.031	4.10
RCC1008150MZF	15 \pm 20%	1V/2.52M	0.036	3.70
RCC1008180MZF	18 \pm 20%	1V/2.52M	0.049	3.40
RCC1008220MZF	22 \pm 20%	1V/2.52M	0.055	3.10
RCC1008270MZF	27 \pm 20%	1V/2.52M	0.062	2.80
RCC1008330KZF	33 \pm 10%	1V/2.52M	0.079	2.50
RCC1008390KZF	39 \pm 10%	1V/2.52M	0.087	2.30
RCC1008470KZF	47 \pm 10%	1V/2.52M	0.099	2.10
RCC1008560KZF	56 \pm 10%	1V/2.52M	0.130	1.90
RCC1008680KZF	68 \pm 10%	1V/2.52M	0.140	1.70
RCC1008820KZF	82 \pm 10%	1V/2.52M	0.160	1.60
RCC1008101KZF	100 \pm 10%	1V/1K	0.210	1.40
RCC1008121KZF	120 \pm 10%	1V/1K	0.240	1.30
RCC1008151KZF	150 \pm 10%	1V/1K	0.320	1.20
RCC1008181KZF	180 \pm 10%	1V/1K	0.350	1.10
RCC1008221KZF	220 \pm 10%	1V/1K	0.450	0.96
RCC1008271KZF	270 \pm 10%	1V/1K	0.610	0.87
RCC1008331KZF	330 \pm 10%	1V/1K	0.690	0.79
RCC1008391KZF	390 \pm 10%	1V/1K	0.780	0.72
RCC1008471KZF	470 \pm 10%	1V/1K	1.000	0.66
RCC1008561KZF	560 \pm 10%	1V/1K	1.200	0.60
RCC1008681KZF	680 \pm 10%	1V/1K	1.400	0.55
RCC1008821KZF	820 \pm 10%	1V/1K	1.800	0.50
RCC1008102KZF	1000 \pm 10%	1V/1K	2.100	0.45

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

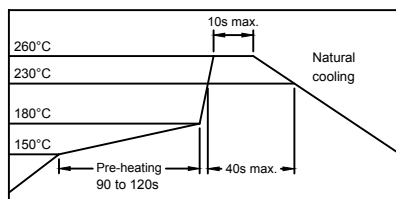

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


15.09.2016




SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

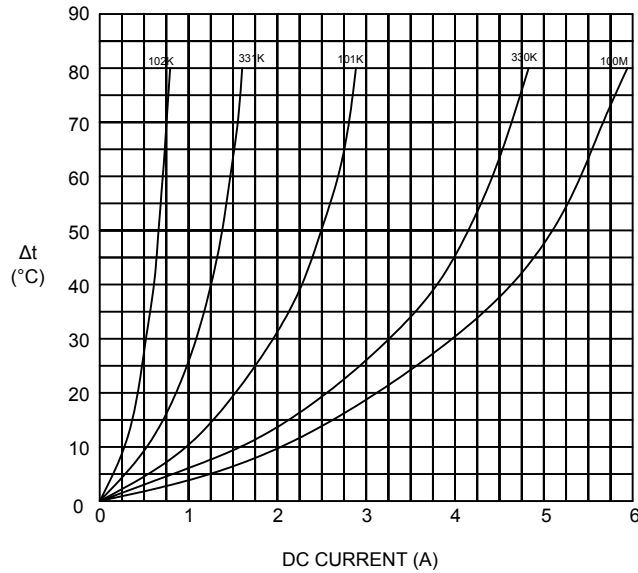

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

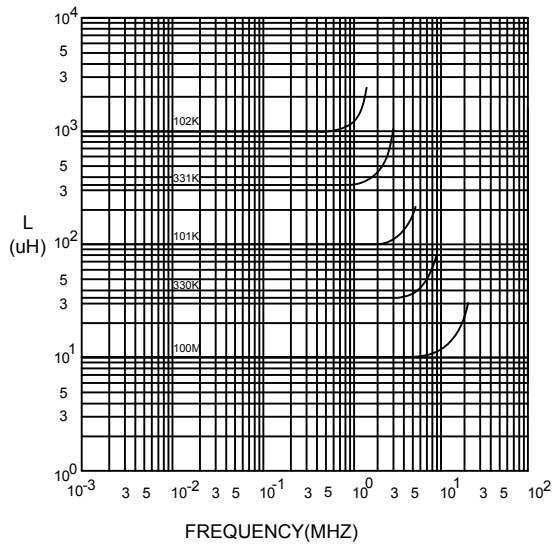

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

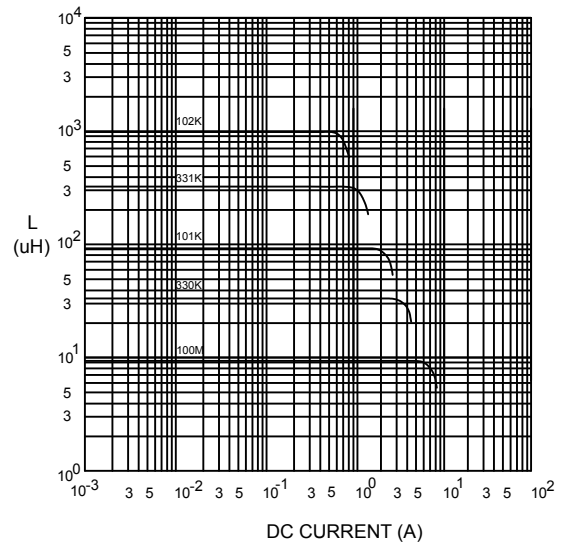

NOTE : Specifications subject to change without notice. Please check our website for latest information.



RoHS Compliant



SUPERWORLD ELECTRONICS (S) PTE LTD

15.09.2016

8. PACKAGING INFORMATION :

CODE	INNER PACKAGE	INNER PACKAGE QTY
F	TRAY	200 PCS



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.09.2016



SUPERWORLD ELECTRONICS (S) PTE LTD