


3. Schematic

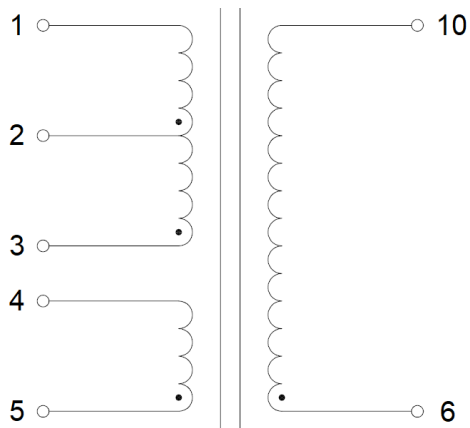

4. Material List

1	Bobbin	LCP
2	Core	EFD15
3	Wire	Polyurethane DD (1UEW)
4	Tape	Polyester Tape
5	Varnish	Ripley 468-2FC
6	Adhesive	Epoxy

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (uH) 3-1	Test Frequency	DCR (Ω) Max @25°C			
		2-1	3-2	5-4	6-10
21~32	0.1V/10KHz	0.066	0.066	0.084	176

NOTE: Specifications subject to change without notice. Please check our website for latest information.