


1. Part No. Expression

EFDB5HTF - 50733

(a) (b) (c) (d) (e) (f)

- (a) Series Code
- (b) Dimension Code
- (c) Category Code
- (d) Type Code
- (e) Packaging Code
- (f) Internal Code


2. Configuration & Dimensions (Unit: mm)

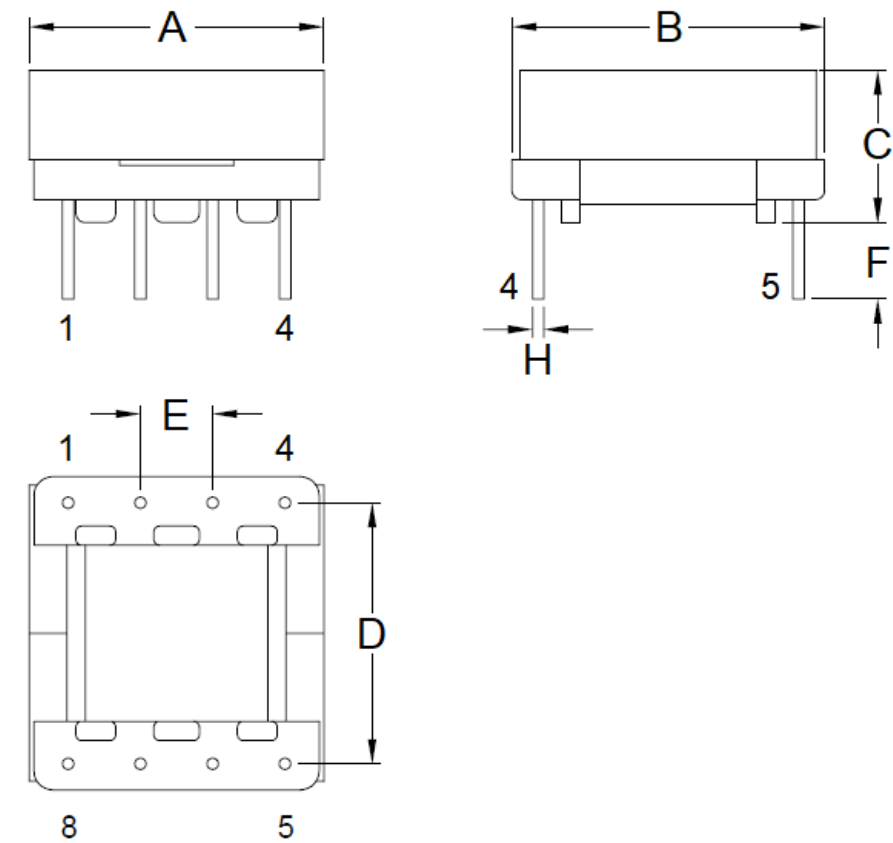

A	B	C	D	E	F	H
16.76 Max	16.76 Max	8.89 Max	13.70±0.50	3.80±0.30	4.00±0.50	Ø0.60 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

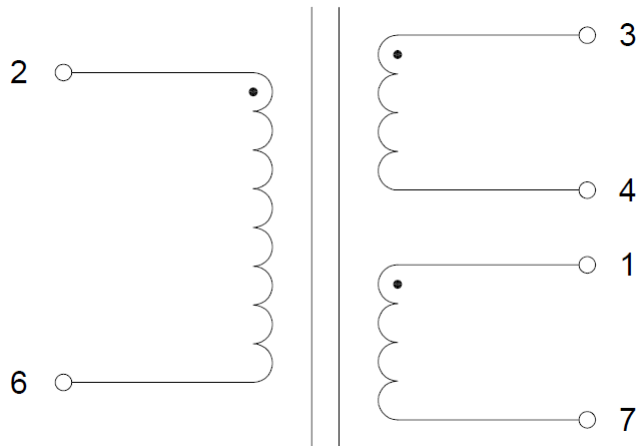

4. Material List

1	Bobbin	Phenolic
2	Core	EFD15
3	Wire	Polyurethane (UEW)
4	Tape	Polyester Tape
5	Varnish	Synthite AC-43

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (uH) Min 2-6	Test Frequency	DCR (Ω) $\pm 10\%$ @25°C		
		2-6	3-4	1-7
18	0.1V/10KHz	0.77	3.08	1.55

NOTE: Specifications subject to change without notice. Please check our website for latest information.