


1. Part No. Expression:

S C T 5 0 0 4 6 R 3 K A 1 1 D

(a) (b) (c) (d) (e)

- | | |
|---------------------|--------------------|
| (a) Series Code | (d) Tolerance Code |
| (b) Dimension Code | (e) Internal Code |
| (c) Inductance Code | |

2. Configuration & Dimensions (Unit: mm)

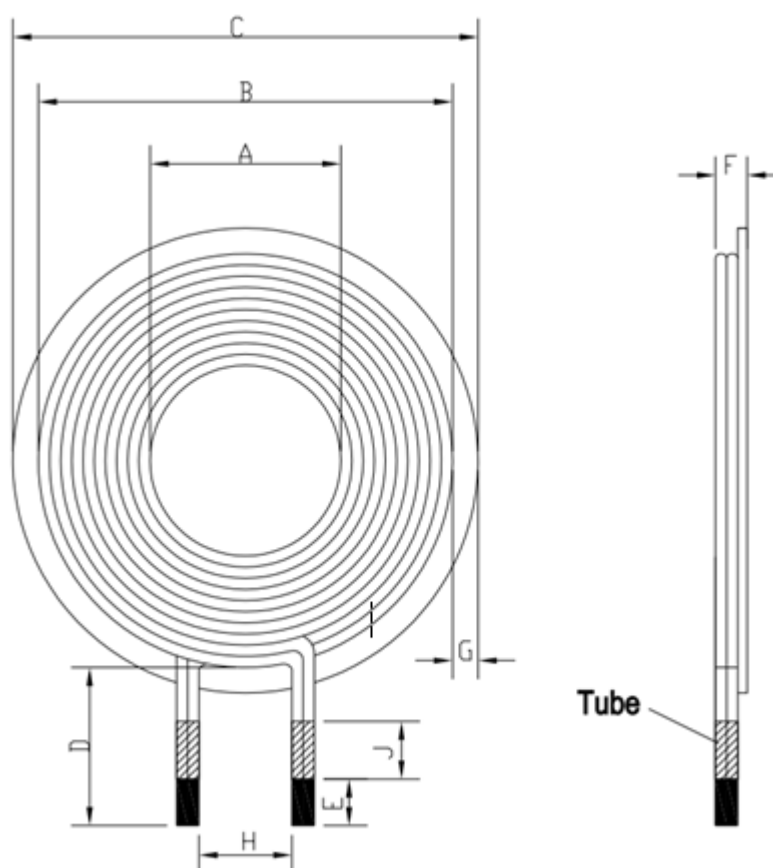

A	B	C	D	E
20.5±0.5	44.0±1.5	50.0±0.5	17.0±2.0	5.0±2.0
F	G	H	J	-
4.0 Max	2.0 Min	10.0 Ref	8.0 Ref	-

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic:




4. Features and Application

Inductance (uH) ±10%	Test Frequency	DCR (mΩ) Max	Irms (mA) Max
6.3	1V/100KHz	25	10000

5. Electrical Specifications

- (a) Operating Temp.: -40°C to +85°C
- (b) Storage Temp.: -40°C to +85°C (Packaging)
- (c) Heat Rated Current (Irms) will cause the coil temperature rise ΔT of 40°C Max.
- (d) Power Rating: 5W
- (e) Compatible to Qi standard A11 design.

6. Material List

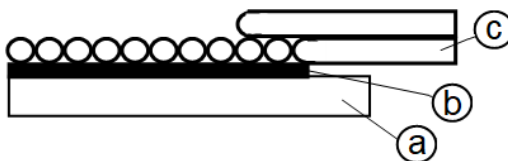

- (a) Ferrite Sheet (MnZn)
- (b) Adhesive
- (c) Wire

NOTE: Specifications subject to change without notice. Please check our website for latest information.