


1. Part No. Expression

SEEB0VTF - 50728

(a) (b) (c) (d) (e) (f)

- (a) Series Code
- (b) Dimension Code
- (c) Category Code
- (d) Type Code
- (e) Packaging Code
- (f) Internal Code


2. Configuration & Dimensions (Unit: mm)

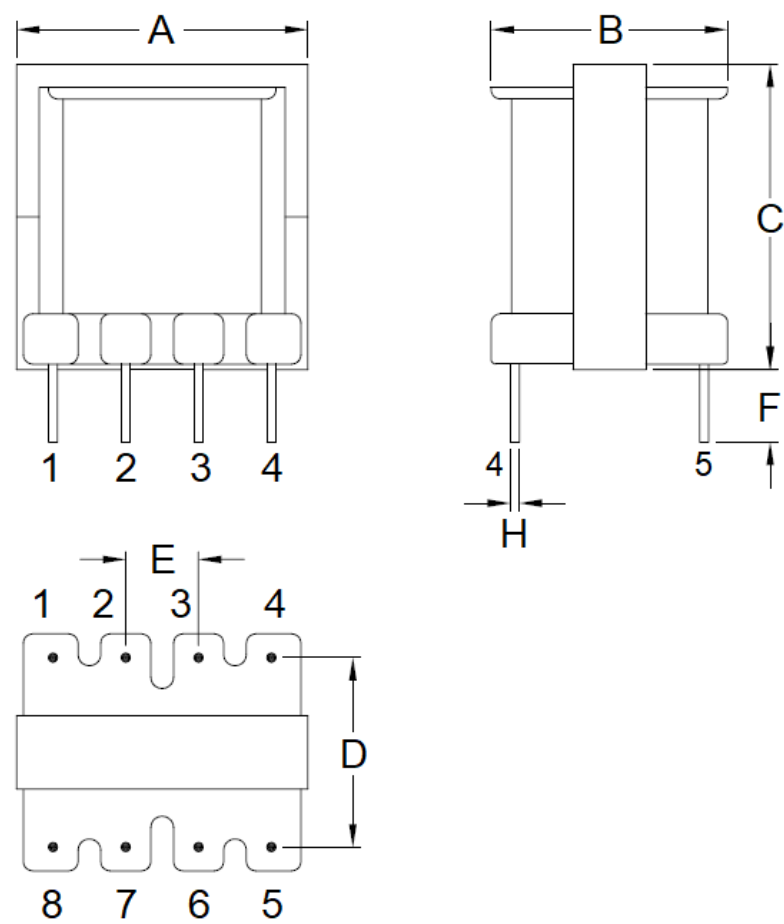

A	B	C	D	E	F	H
11.3 Max	11.3 Max	12.3 Max	8.0±0.3	2.5±0.3	2.8 Min	Ø0.5 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

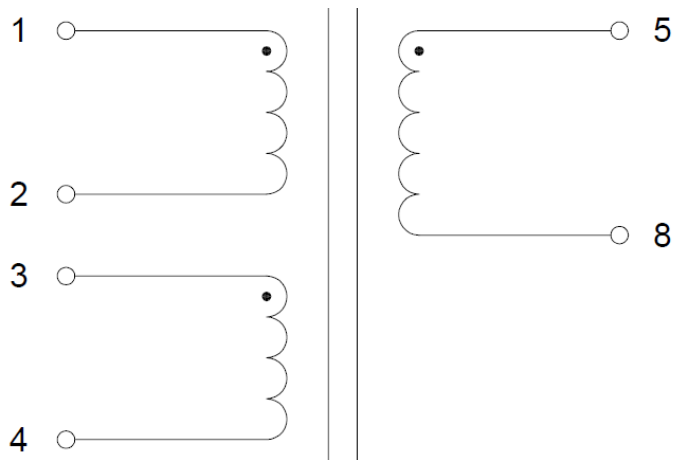

4. Material List

1	Bobbin	Phenolic
2	Core	EE10.2
3	Wire	Polyurethane (1UEW+NY)
5	Tape	Polyester Film
6	Epoxy	9001A/B

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (uH) 1-2		Test Frequency	DCR (Ω) Max @20°C		
Min	Typ		1-2	3-4	5-8
338	376~460	0.25V/100KHz	0.75	2.25	2.25

NOTE: Specifications subject to change without notice. Please check our website for latest information.