

1. Part No. Expression

SEIB2VTF - 50724
(a) (b) (c) (d) (e) (f)

- (a) Series Code


(b) Dimension Code

(c) Category Code
- (d) Type Code

(e) Packaging Code

(f) Internal Code


2. Configuration & Dimensions (Unit: mm)

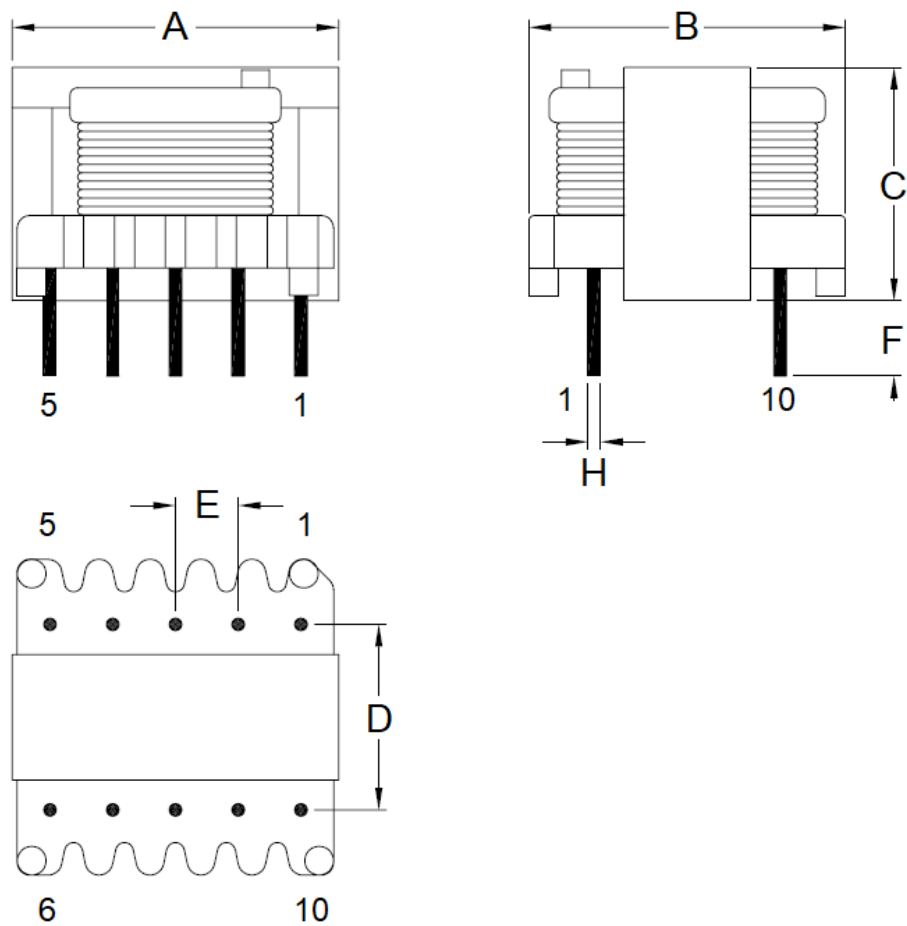

A	B	C	D	E	F	H
13.00±1.00	12.50±0.50	9.50±1.00	7.50±0.50	2.50±0.50	3.60±1.00	Ø0.60±0.05

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

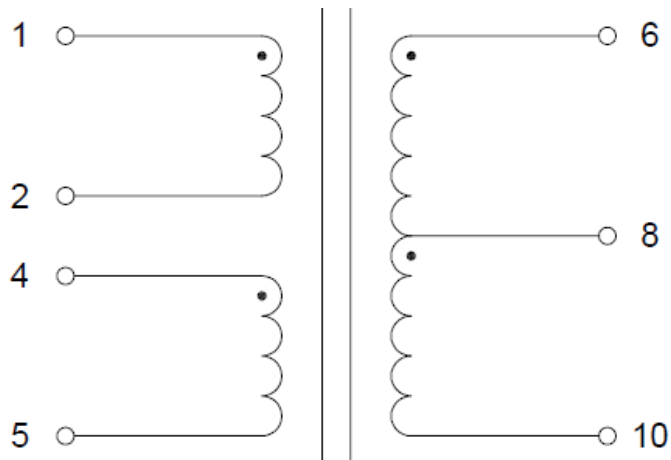

4. Material List

1	Bobbin	Phenolic
2	Core	EI12.5
3	Wire	Polyurethane (UEW)
5	Tape	Polyester Film
6	Varnish	Synthite AC-43

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Impedance (KΩ) ±10%		Conditions		Test Frequency	DCR (Ω) ±10% @25°C	
(1-5) tie: 2.4	(6-10) tie: 2.4	Load 6-10	Load 1-5		(1-5) tie: 2.4	(6-10)
10	10	10KΩ	10KΩ	1V/1KHz	700	650

NOTE: Specifications subject to change without notice. Please check our website for latest information.