

1. Part No. Expression

SEPA7HTF - 50741

(a) (b) (c) (d) (e) (f)

- (a) Series Code


(b) Dimension Code

(c) Category Code
- (d) Type Code

(e) Packaging Code

(f) Internal Code


2. Configuration & Dimensions (Unit: mm)

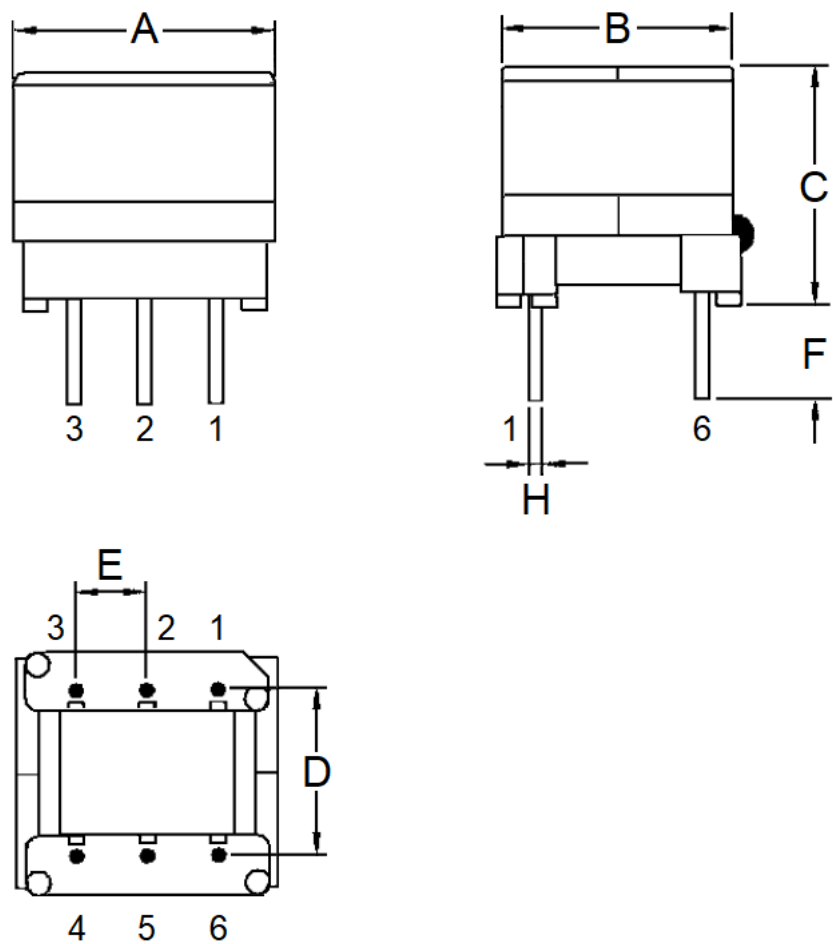

A	B	C	D	E	F	H
10.00 Max	8.75 Max	10.00 Max	5.08±0.30	2.54±0.30	3.50±0.50	Ø0.60 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

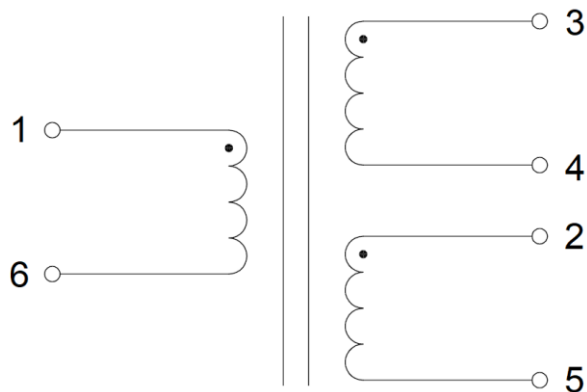

4. Material List

1	Bobbin	PHENOLIC RESIN(BAKELITE) PM-9630 94V-0
2	Core	EP7
3	Wire	POLYURETHANE (UEW)
5	Tape	Polyester Film
6	Epoxy	AV119

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance ±10%			Test Frequency	DCR (Ω) Max @25°C		
1-6	2-5	3-4		1-6	2-5	3-4
3 mH	272.25 uH	272.25 uH	0.1V/10KHz	5.4	1.0	1.0

NOTE: Specifications subject to change without notice. Please check our website for latest information.