

1. Part No. Expression

SRMA4VTF-50772

(a) (b) (c) (d) (e) (f)

- (a) Series Code


(b) Dimension Code

(c) Category Code
- (d) Type Code

(e) Packaging Code

(f) Internal Code


2. Configuration & Dimensions (Unit: mm)

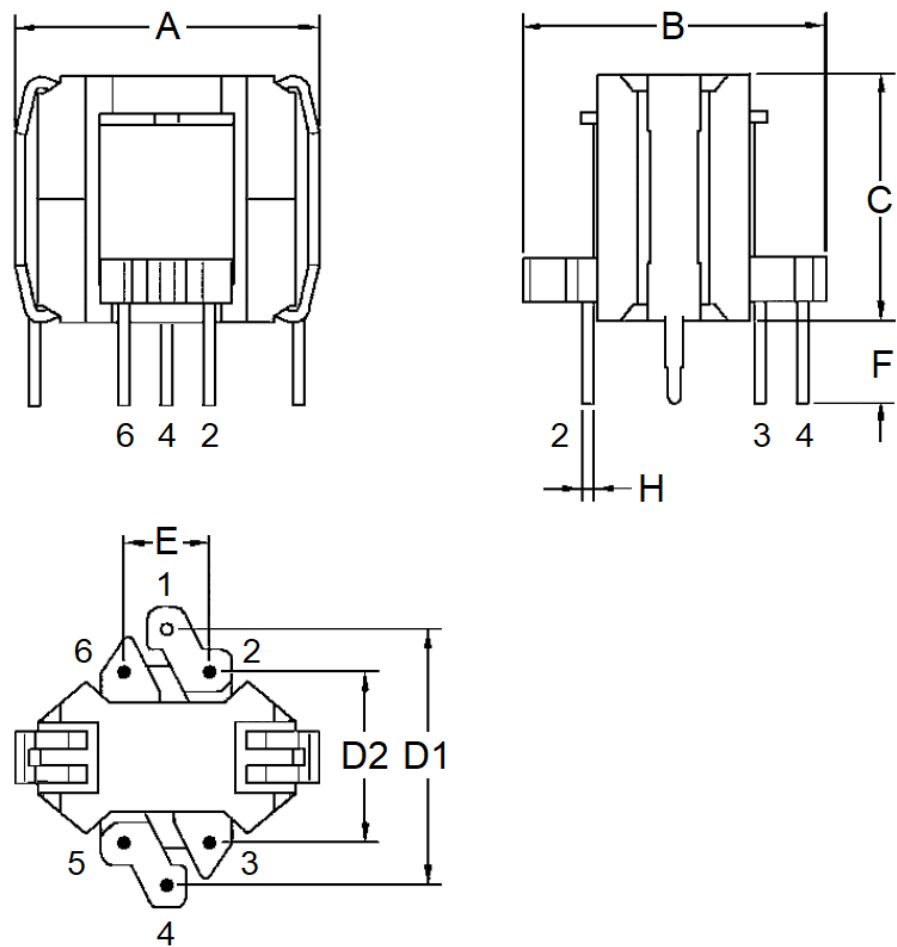

A	B	C	D1	D2	E	F	H
14.0 Max	13.5 Max	11.0 Max	10.8±0.3	7.2±0.3	3.6±0.3	3.5±0.5	Ø0.5 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

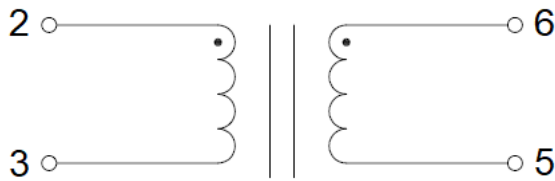

4. Material List

1	BOBBIN	PHENOLIC RESIN(BAKELITE) PM-9630 94V-0
2	CORE	RM4
3	WIRE	POLYURETHANE DD(1UEW)
5	TAPE	Polyester Film
6	VARNISH	SYNTHITE AC-43
7	CLIP	RM4

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (mH) $\pm 20\%$ 2-3	Test Frequency	DCR (m Ω) +10% @25°C 2-3 = 6-5
5.0	1V/50KHz	460

NOTE: Specifications subject to change without notice. Please check our website for latest information.