

1. Part No. Expression

S R M A 5 V S F - 5 0 5 0 5

(a) (b) (c) (d) (e) (f)

- (a) Series Code


(b) Dimension Code

(c) Category Code
- (d) Type Code

(e) Packaging Code

(f) Internal Code


2. Configuration & Dimensions (Unit: mm)

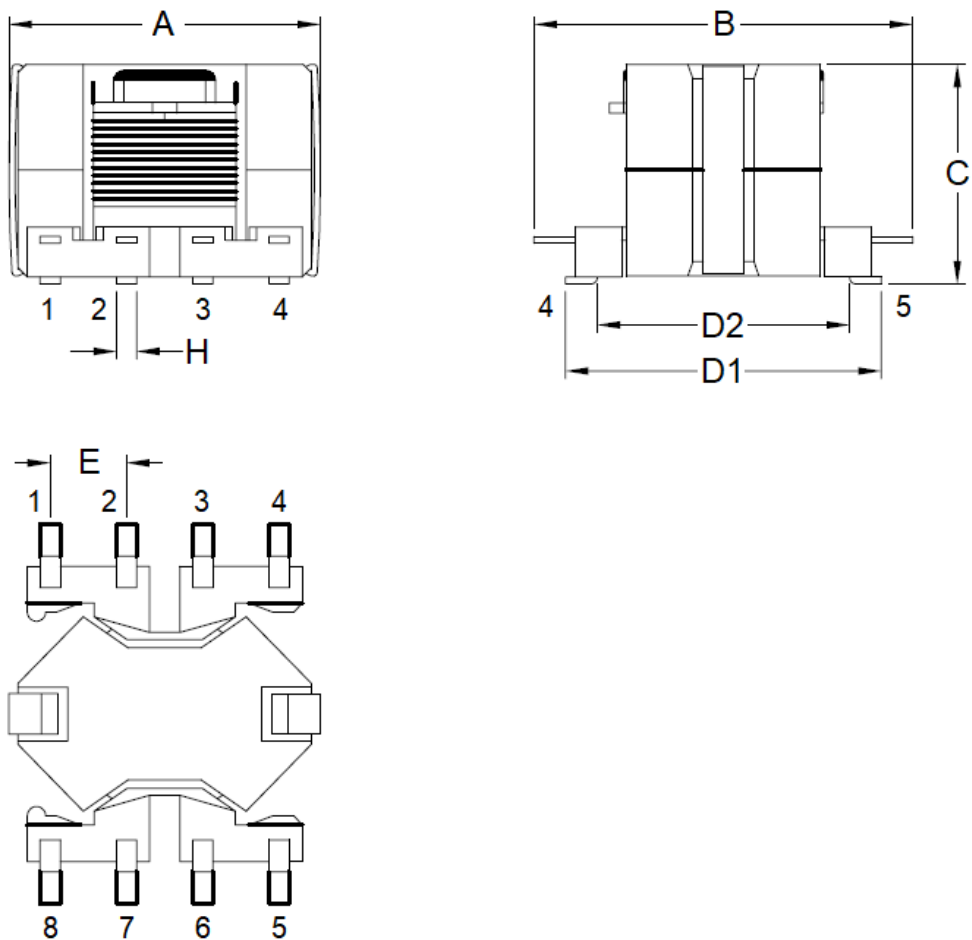

A	B	C	D1	D2	E	H
16.70 Max	19.40 Max	11.00 Max	15.20±0.20	12.00±0.20	3.75±0.20	Ø1.00 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

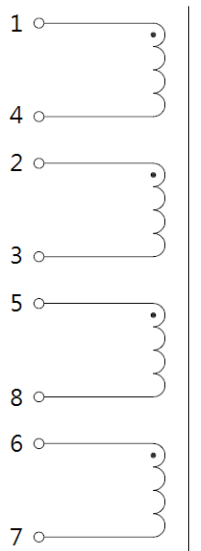

4. Material List

1	Bobbin	Phenolic
2	Core	RM5
3	Wire	Polyurethane DD (2UEW)
5	Epoxy	9001A/B
6	Clip	RM5

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (uH)				Test Frequency	DCR (mΩ) Max @25°C	
1-4	2-3	5-8	6-7		(1-4) tie:2.3	(5-7) tie:6.8
2.4~2.8	2.4~2.8	2.4~2.8	2.4~2.8	0.02V/10KHz	26	32

NOTE: Specifications subject to change without notice. Please check our website for latest information.