


1. Part No. Expression

P I C Q 0 6 0 3 H R 1 0 Y F

(a) (b) (c) (d) (e) (f)

- | | |
|--------------------|---------------------|
| (a) Series Code | (d) Inductance Code |
| (b) Dimension Code | (e) Tolerance Code |
| (c) Material Code | (f) Packaging Code |

2. Configuration & Dimensions (Unit: mm)

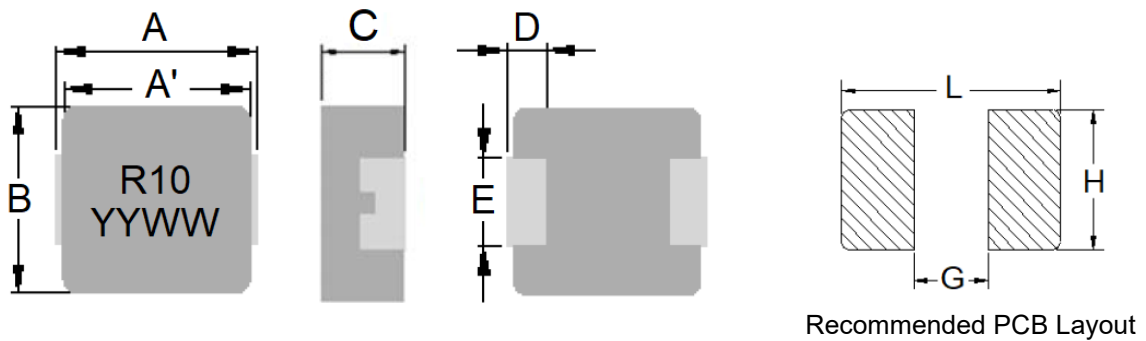


- Note:
1. The above PCB layout reference only.
 2. Recommend solder paste thickness at 0.15 mm and above.
 3. Marking: Top= Inductance Code, Bottom=YYWW (Year/World week), Black


A	A'	B	C	D	E	L	G	H
7.3±0.3	6.7±0.3	6.6±0.3	2.8±0.2	1.8±0.3	3.0±0.3	8.4 Ref	2.5 Ref	3.5 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic



4. Material List



NO	Items
(a)	Core
(b)	Wire
(c)	Clip
(d)	Ink
(e)	Paint

5. General Specifications

- (a) Reliability test for this part meets AEC-Q200 standard.
- (b) Operating Temp.: - 55°C to + 125°C (including self-temperature rise)
- (c) Storage Temp.: - 55°C to + 125°C (on board)
- (d) All test data referenced to 25°C ambient.
- (e) Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.
- (f) Saturation Current (Isat) will cause inductance L0 to drop approximately 30%.
- (g) Rated DC Current: The lower value of Irms and Isat.
- (h) Part Temperature (Ambient + Temp. Rise): Should not exceed 125°C under worst case operating conditions.
- (i) Maximum Operating Voltage: 50V
- (j) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Electrical Characteristics

Part Number	Inductance (μ H) @0A	Test Frequency	I _{rms} (A) Typ	I _{sat} (A) Typ	DCR (m Ω)	
					Typ	Max
PICQ0603HR10YF	0.10	1.0V/100KHz	32.5	60.0	1.2	1.7
PICQ0603HR13YF	0.13	1.0V/100KHz	27.6	50.0	1.3	1.8
PICQ0603HR15YF	0.15	1.0V/100KHz	27.0	45.0	1.5	1.9
PICQ0603HR16YF	0.16	1.0V/100KHz	27.0	45.0	1.5	1.9
PICQ0603HR18YF	0.18	1.0V/100KHz	25.0	43.0	1.7	2.3
PICQ0603HR19YF	0.19	1.0V/100KHz	24.0	41.0	1.8	2.5
PICQ0603HR20YF	0.20	1.0V/100KHz	24.0	41.0	1.8	2.5
PICQ0603HR22YF	0.22	1.0V/100KHz	23.0	40.0	2.1	2.8
PICQ0603HR25MF	0.25	1.0V/100KHz	21.0	39.0	3.3	3.5
PICQ0603HR30MF	0.30	1.0V/100KHz	21.0	35.0	3.2	3.8
PICQ0603HR33MF	0.33	1.0V/100KHz	20.0	32.0	3.5	3.9
PICQ0603HR36MF	0.36	1.0V/100KHz	19.0	32.0	3.6	4.2
PICQ0603HR40MF	0.40	1.0V/100KHz	18.0	27.5	3.71	4.1
PICQ0603HR47MF	0.47	1.0V/100KHz	17.5	26.0	4.0	4.2
PICQ0603HR56MF	0.56	1.0V/100KHz	16.5	25.5	4.7	5.0
PICQ0603HR60MF	0.60	1.0V/100KHz	16.0	25.5	4.7	5.2
PICQ0603HR68MF	0.68	1.0V/100KHz	15.5	25.0	4.8	5.5
PICQ0603HR75MF	0.75	1.0V/100KHz	14.5	24.5	5.5	6.6
PICQ0603HR82MF	0.82	1.0V/100KHz	13.0	24.0	6.7	8.0
PICQ0603HR90MF	0.90	1.0V/100KHz	11.0	22.0	8.3	10.0

Tolerance Code: M = $\pm$ 20%, Y = $\pm$ 30%

NOTE: Specifications subject to change without notice. Please check our website for latest information.


Part Number	Inductance (μ H) @0A	Test Frequency	I _{rms} (A) Typ	I _{sat} (A) Typ	DCR (m Ω)	
					Typ	Max
PICQ0603H1R0MF	1.00	1.0V/100KHz	11.0	22.0	8.3	10.0
PICQ0603H1R2MF	1.20	1.0V/100KHz	10.0	20.0	10.0	12.0
PICQ0603H1R5MF	1.50	1.0V/100KHz	9.0	18.0	13.0	15.0
PICQ0603H1R8MF	1.80	1.0V/100KHz	8.5	16.0	14.0	17.0
PICQ0603H2R0MF	2.00	1.0V/100KHz	8.2	15.0	16.0	19.0
PICQ0603H2R2MF	2.20	1.0V/100KHz	8.0	14.0	18.0	20.0
PICQ0603H2R5MF	2.50	1.0V/100KHz	7.0	13.0	20.0	22.0
PICQ0603H2R7MF	2.70	1.0V/100KHz	7.0	13.0	24.0	27.0
PICQ0603H3R3MF	3.30	1.0V/100KHz	6.0	13.5	28.0	30.0
PICQ0603H4R7MF	4.70	1.0V/100KHz	5.5	10.0	37.0	40.0
PICQ0603H5R6MF	5.60	1.0V/100KHz	5.0	9.0	43.0	48.0
PICQ0603H6R8MF	6.80	1.0V/100KHz	4.5	8.0	54.0	60.0
PICQ0603H8R2MF	8.20	1.0V/100KHz	4.0	7.5	64.0	68.0
PICQ0603H100MF	10.0	1.0V/100KHz	3.5	6.0	75.0	85.0
PICQ0603H120MF	12.0	1.0V/100KHz	3.3	5.5	81.0	93.0
PICQ0603H150MF	15.0	1.0V/100KHz	3.0	4.0	107	123
PICQ0603H180MF	18.0	1.0V/100KHz	2.5	4.0	140	160
PICQ0603H220MF	22.0	1.0V/100KHz	2.0	3.5	165	190
PICQ0603H330MF	33.0	1.0V/100KHz	2.0	2.5	200	240
PICQ0603H470MF	47.0	1.0V/100KHz	1.75	2.0	302	363

Tolerance Code: M = $\pm$ 20%, Y = $\pm$ 30%


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curve


PICQ0603HR10YF

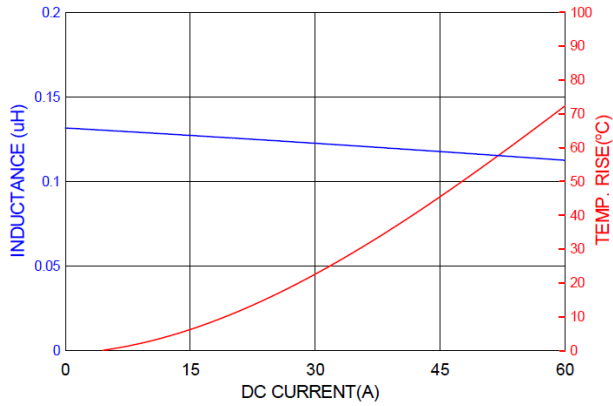


PICQ0603HR13YF

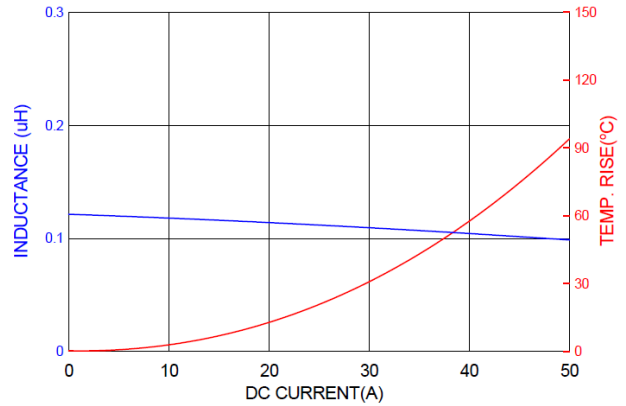


PICQ0603HR15YF

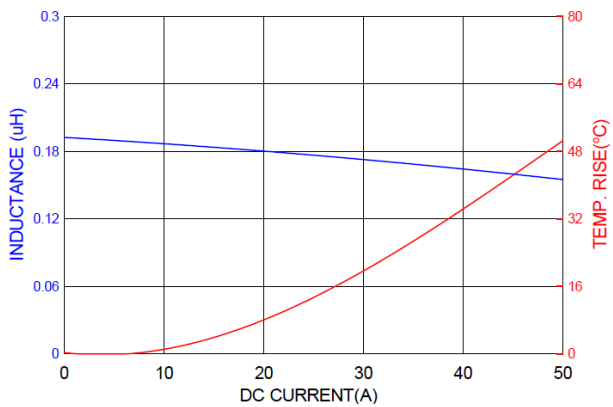


PICQ0603HR16YF

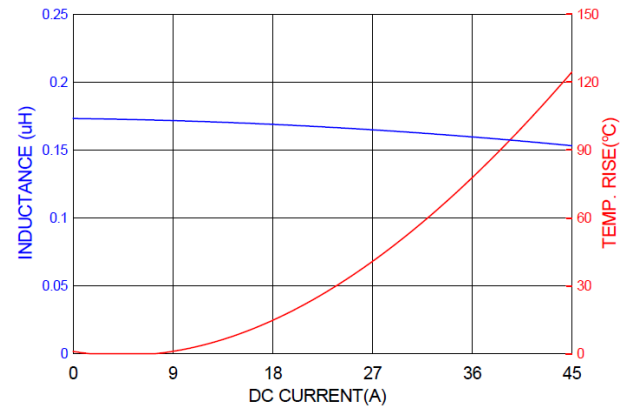

PICQ0603HR18YF

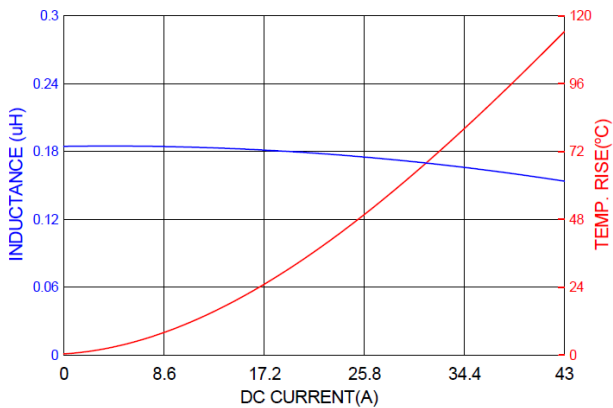


PICQ0603HR19YF

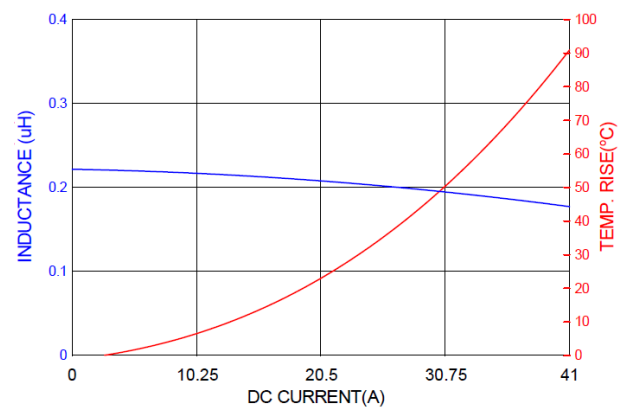


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603HR20YF

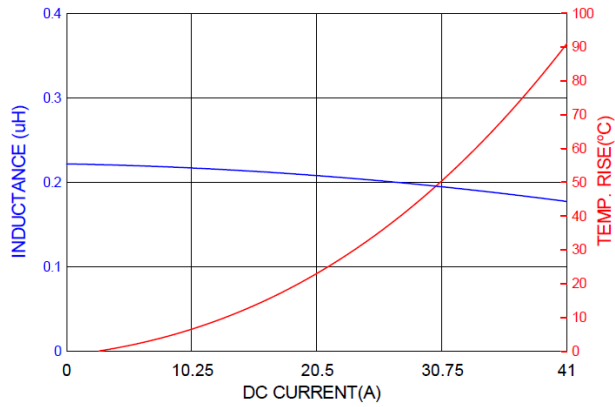


PICQ0603HR22YF

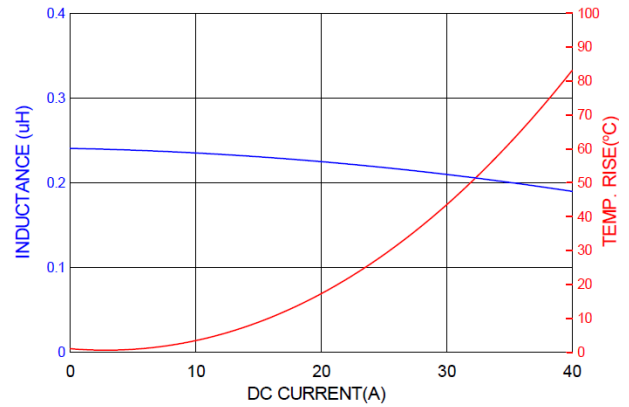


PICQ0603HR25MF

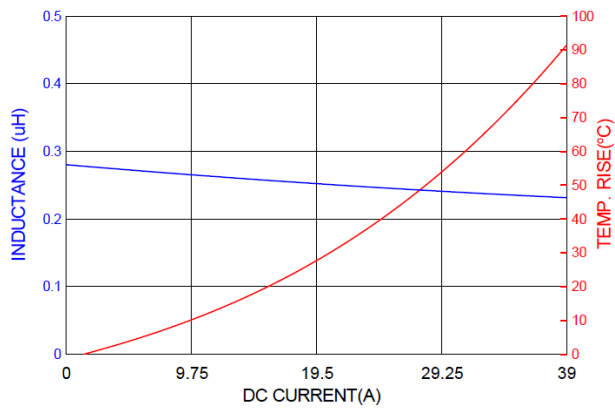


PICQ0603HR30MF

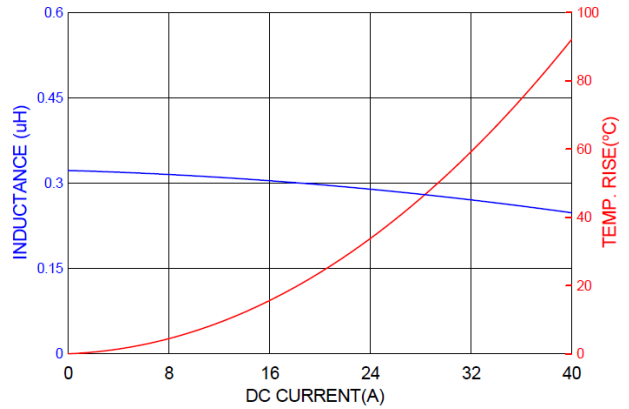

PICQ0603HR33MF

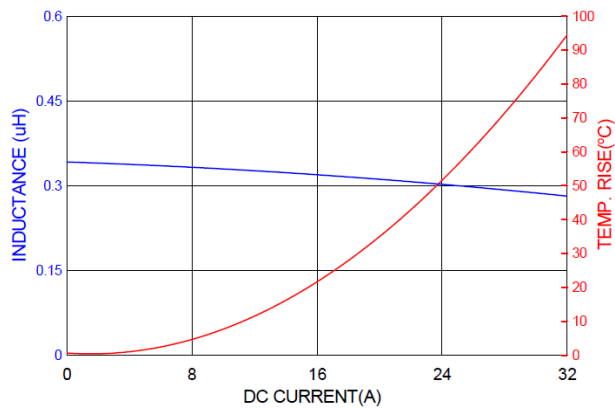


PICQ0603HR36MF

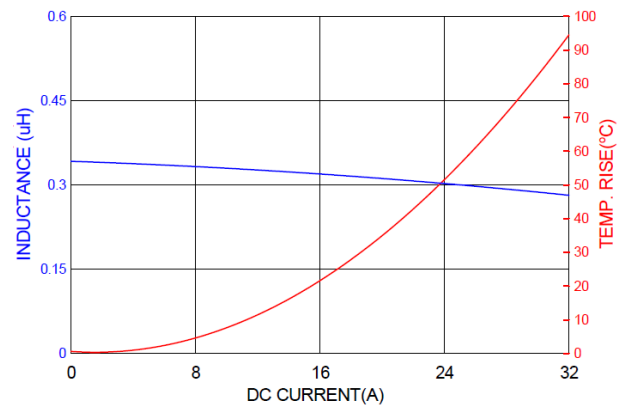


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603HR40MF

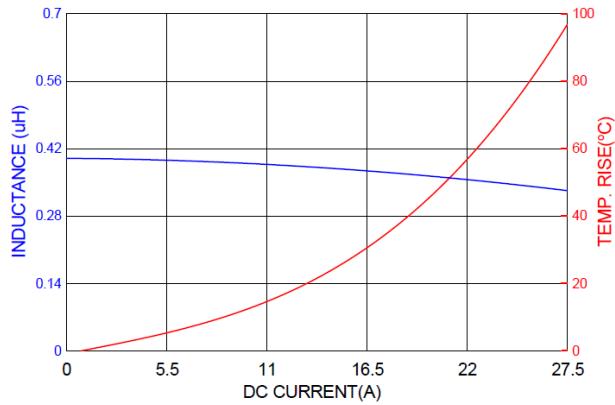


PICQ0603HR47MF

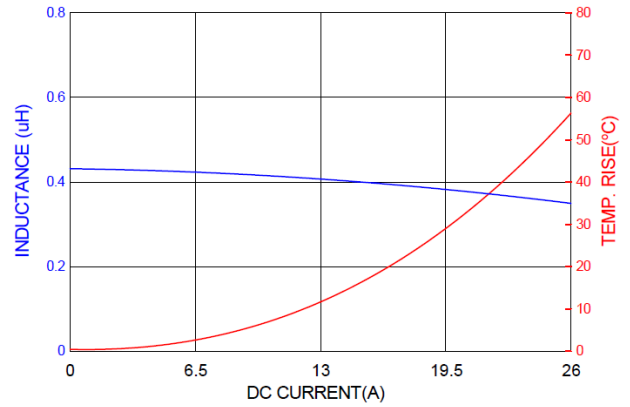


PICQ0603HR56MF

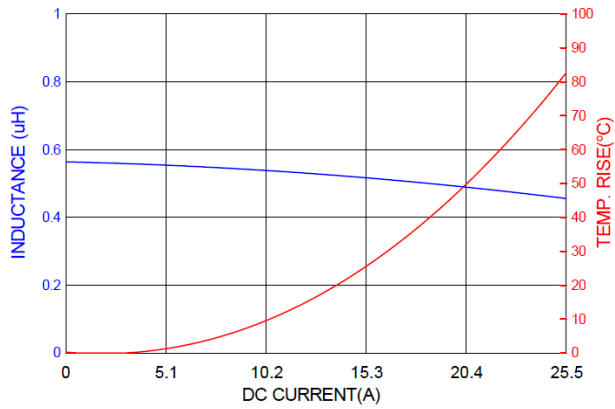


PICQ0603HR60MF

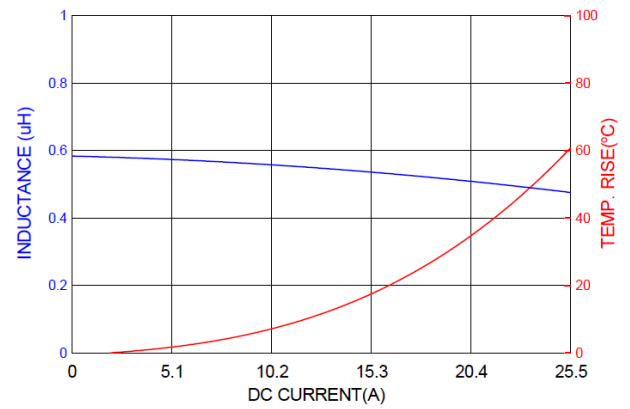

PICQ0603HR68MF

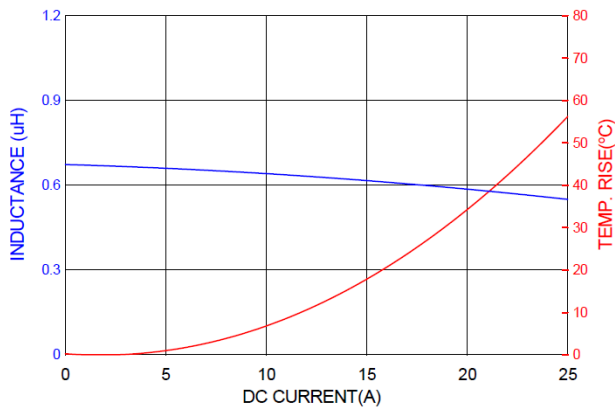


PICQ0603HR75MF

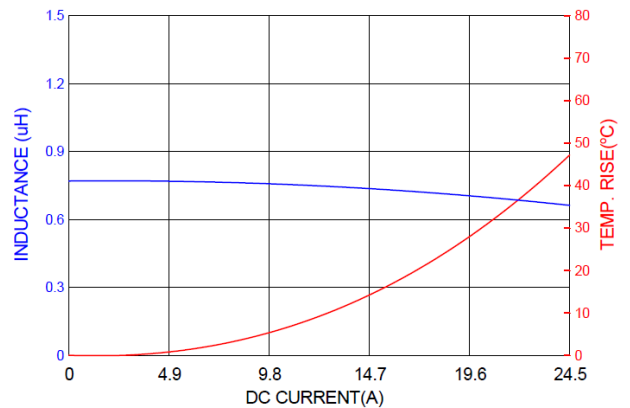


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603HR82MF

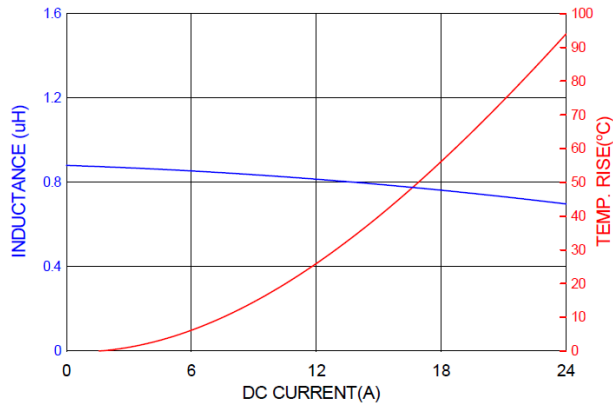


PICQ0603HR90MF

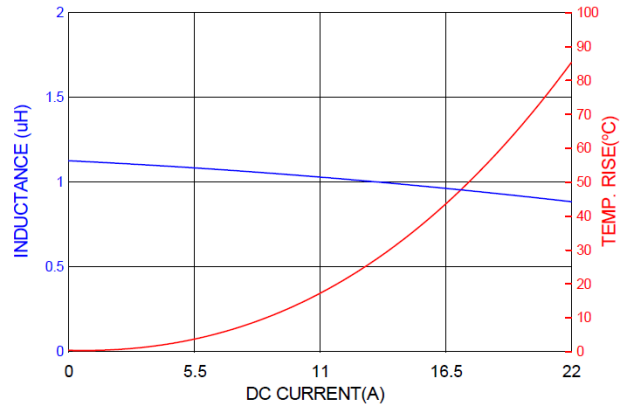


PICQ0603H1R0MF

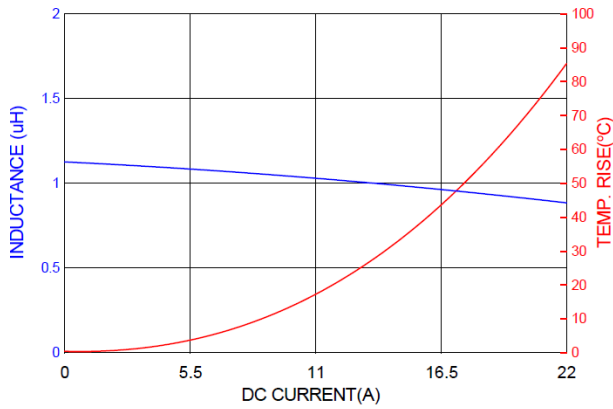


PICQ0603H1R2MF

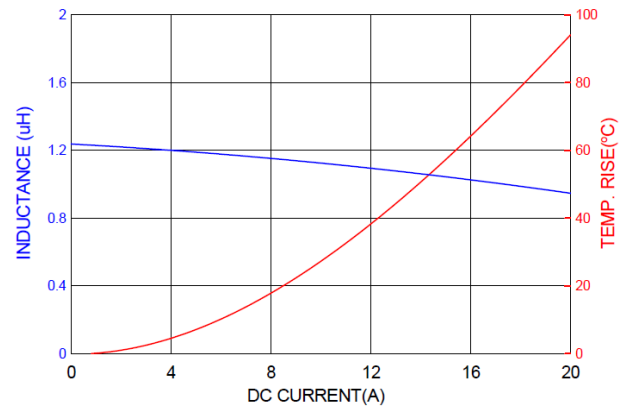

PICQ0603H1R5MF

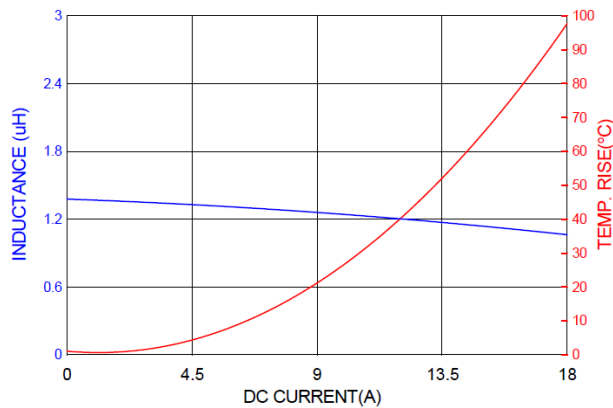


PICQ0603H1R8MF

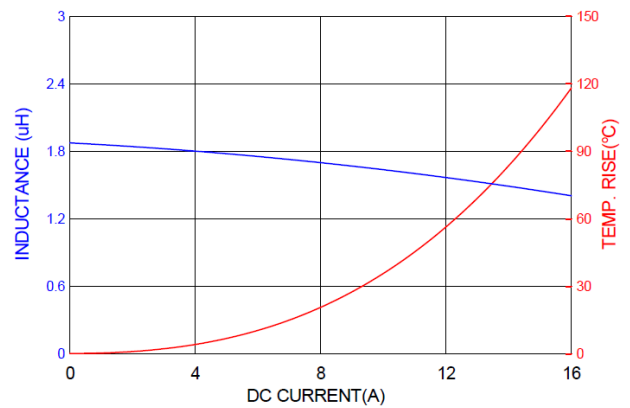


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603H2R0MF

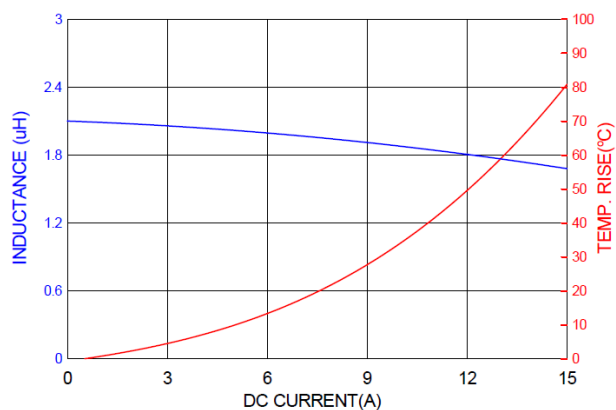


PICQ0603H2R2MF

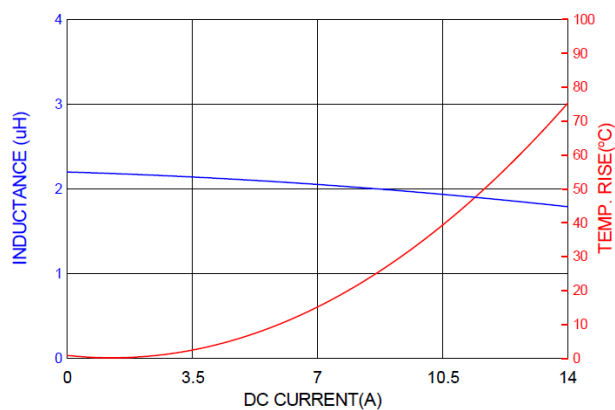


PICQ0603H2R5MF

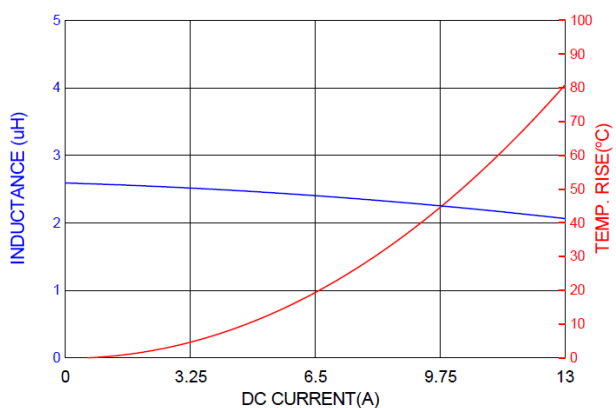


PICQ0603H2R7MF

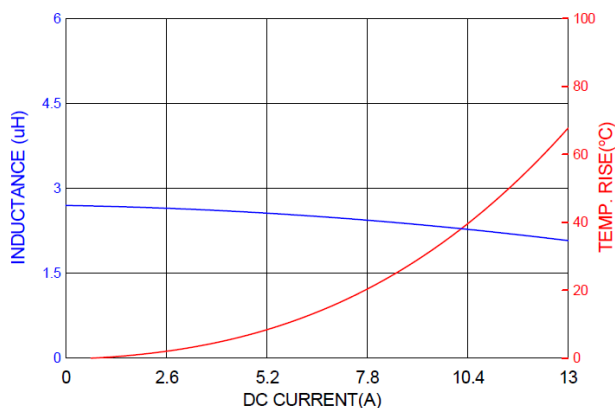

PICQ0603H3R3MF

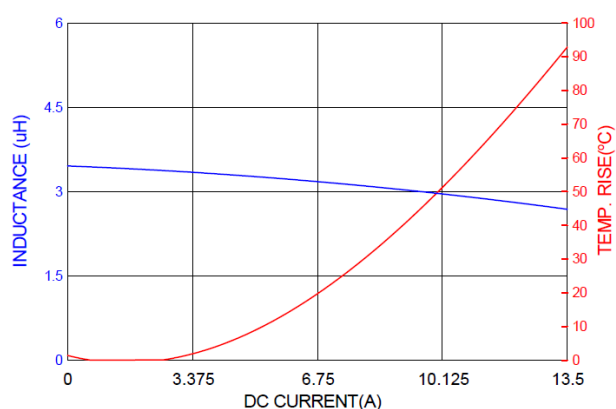


PICQ0603H4R7MF

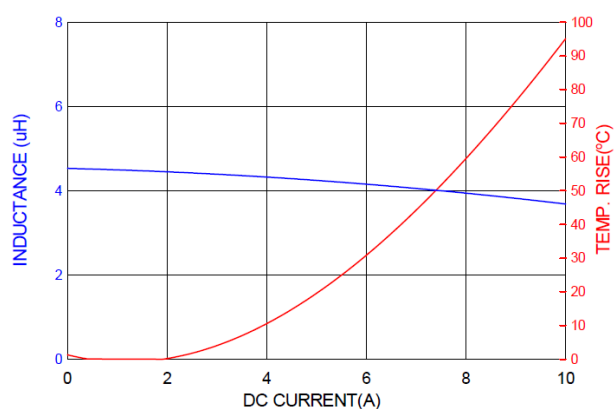


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603H5R6MF

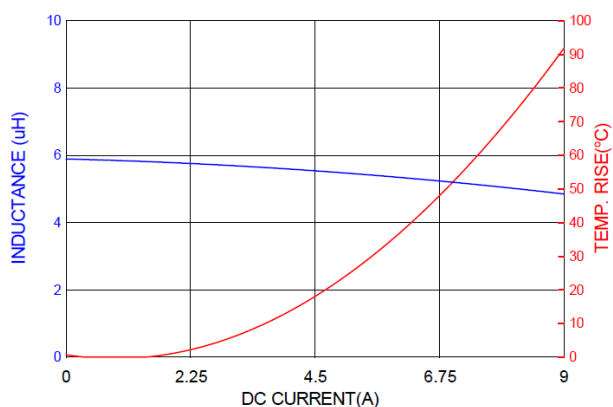


PICQ0603H6R8MF

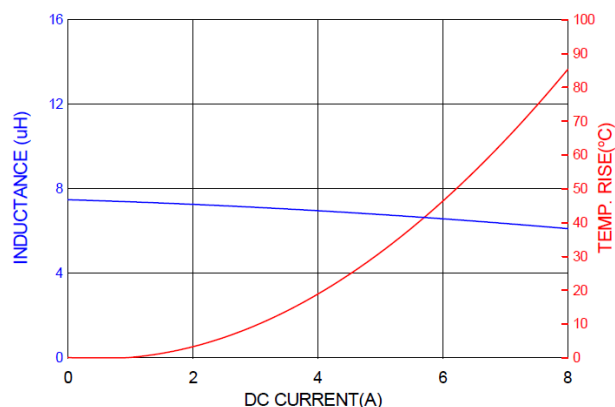


PICQ0603H8R2MF

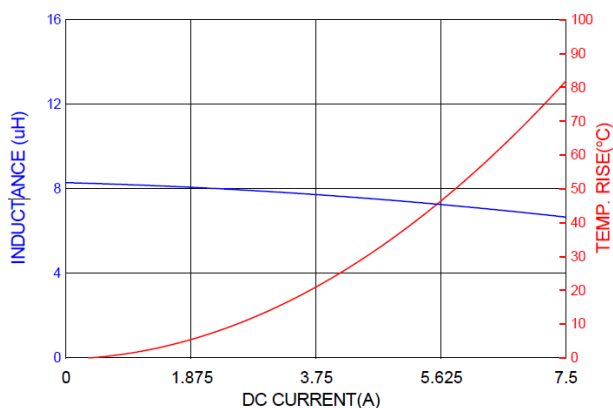


PICQ0603H100MF

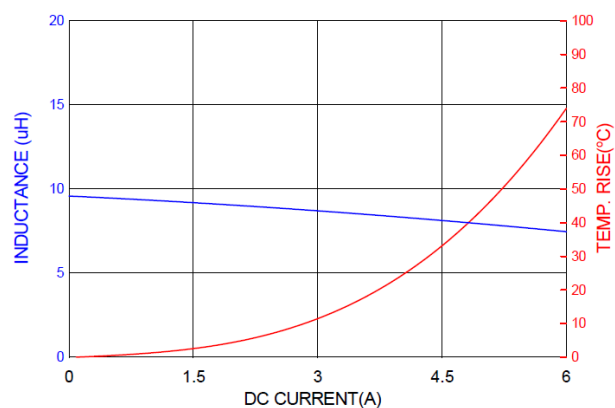

PICQ0603H120MF

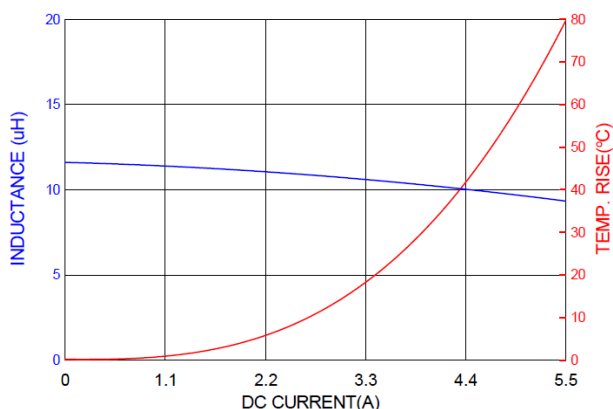


PICQ0603H150MF

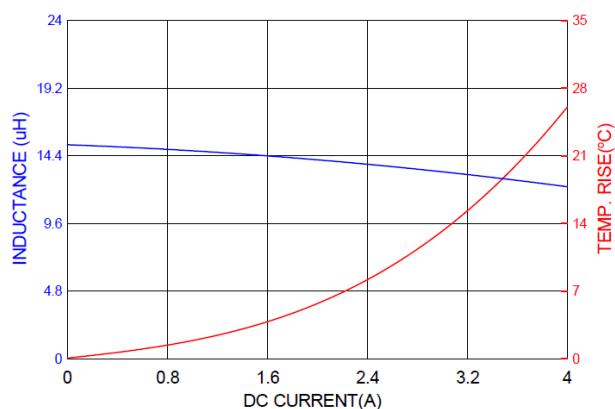


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PICQ0603H180MF

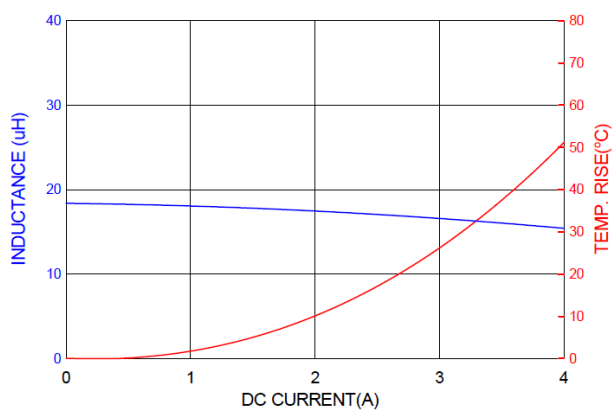


PICQ0603H220MF

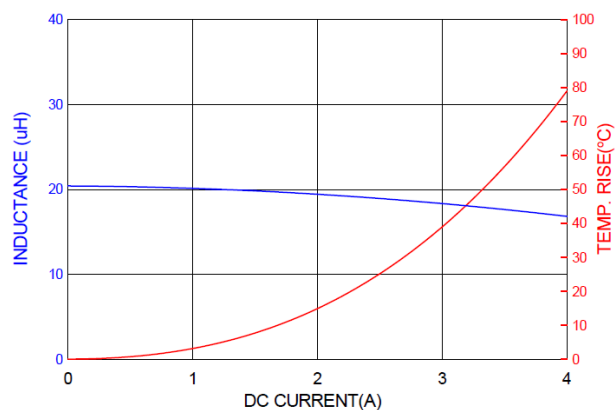

PICQ0603H330MF

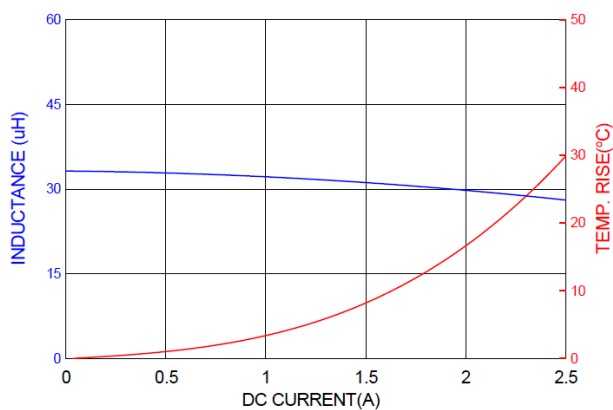

PICQ0603H470MF

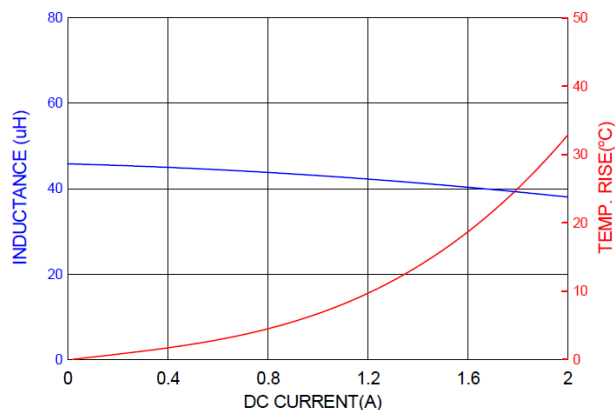

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

8-2. Iron Reflow

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- Preheat circuit and products to 150°C.
- 350°C tip temperature (Max.)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (Max.)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 sec.

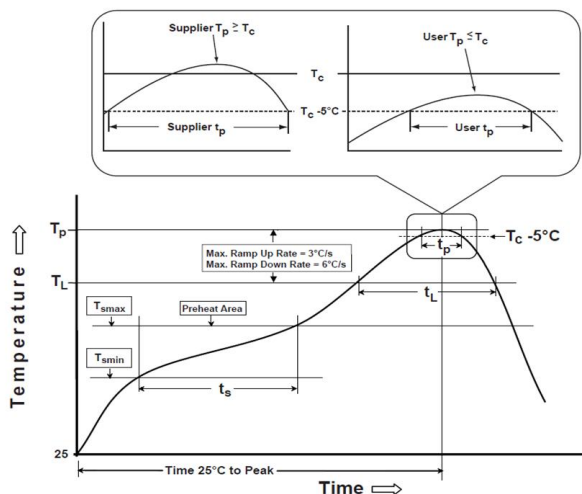

Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

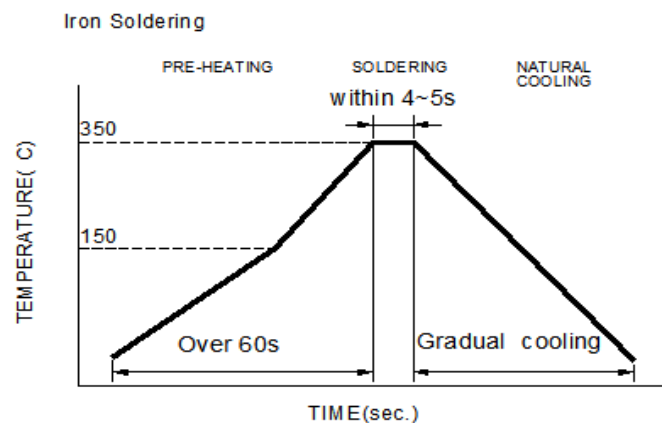

Iron Soldering times : 1 times max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	< 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p : maximum peak package body temperature, **T_c** : the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c** .

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

8-3. Soldering Volume

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below.


Minimum fillet height = soldering thickness + 25% product height.

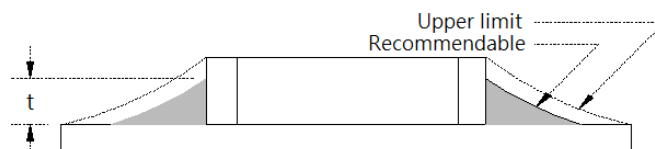

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

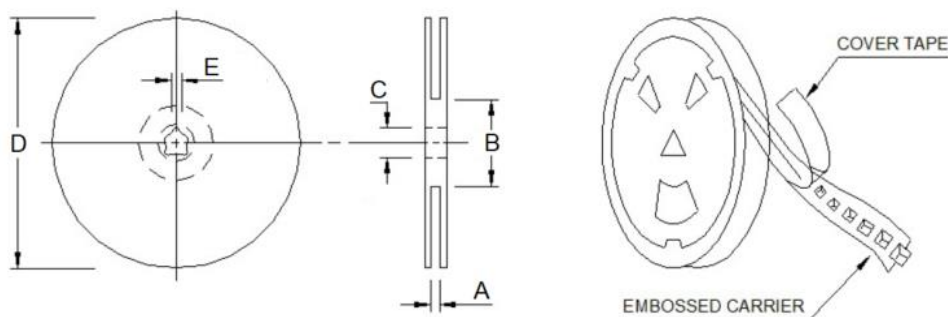

Type	A	B	C	D	E
13"x16mm	16.4 Ref	100.0 Ref	13.0 Ref	330.0 Ref	2.0 Ref

9-2. Tape Dimension (Unit: mm)

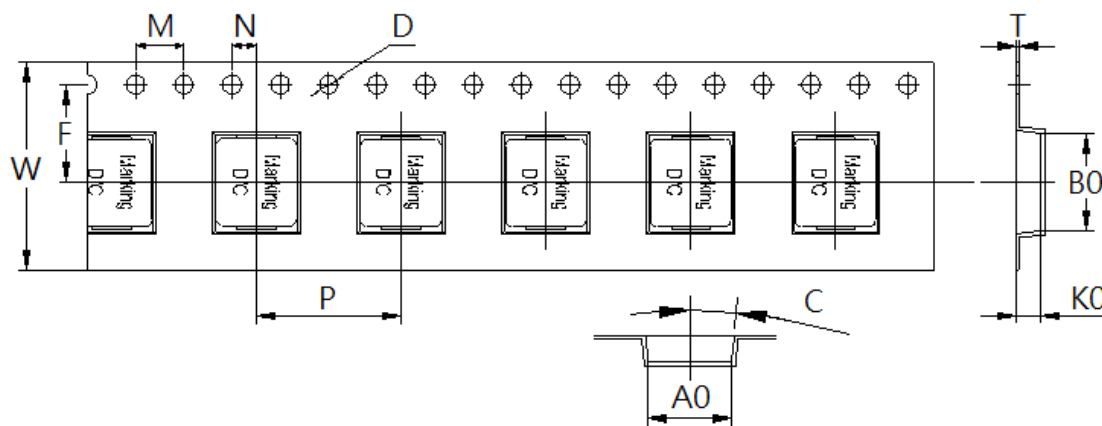


B0	A0	K0	P	W	F
7.70±0.10	7.00±0.10	3.30±0.10	12.00±0.10	16.00±0.30	7.50±0.10
T	M	N	D	C	-
0.35±0.05	4.00	2.00	1.50±0.10	3°	-

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Quantity (Unit: Pcs)

Chip/ Reel	1,000
Inner box	2,000
Carton	8,000

9-4. Tearing Off Force

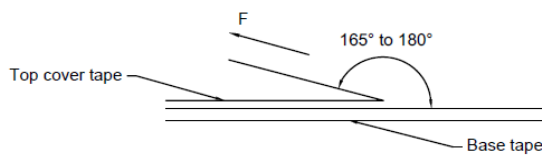

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.