

1. Part No. Expression


PIC 1004 H R15 Y F

(a) (b) (c) (d) (e) (f)



- (a) Series Code
- (b) Dimension Code
- (c) Material Code
- (d) Inductance Code
- (e) Tolerance Code
- (f) Packaging Code

2. Configuration & Dimensions (Unit: mm)

leadframe

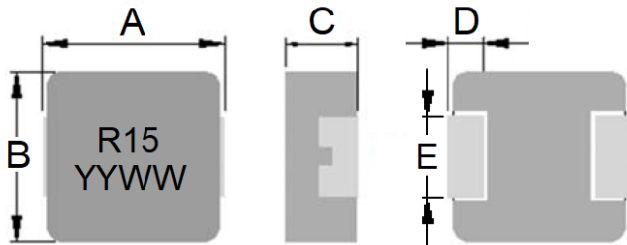

non-leadframe

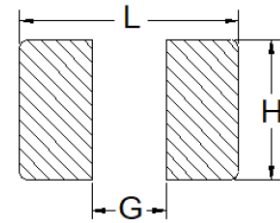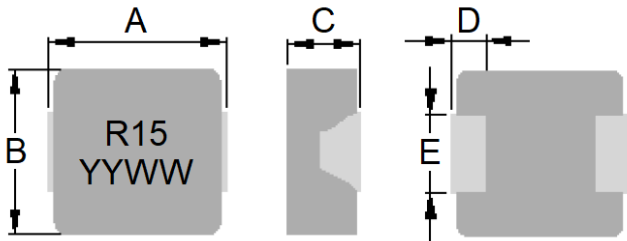


Recommended PCB Layout

- Note:
1. The above PCB layout reference only.
 2. Recommend solder paste thickness at 0.15 mm and above.
 3. Marking: Top= Inductance Code, Bottom=YYWW (Year/World week), Black

Type	A	B	C	D	E	L	G	H
Leadframe	11.0±0.5	10.0±0.3	3.8±0.2	2.3±0.3	3.0±0.3	13.6 Ref	5.4 Ref	3.5 Ref
Non-Leadframe								

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic



4. Material List

<p>Lead Frame</p>	NO	Items	<p>Non-Lead Frame</p>	NO	Items
	(a)	Core		(a)	Core
	(b)	Wire		(b)	Wire
	(c)	Clip		(c)	Solder
	(d)	Ink		(d)	Ink
(e)	Paint	(e)	Paint		

5. General Specifications

- (a) Operating Temp.: - 40°C to + 125°C (including self-temperature rise)
- (b) Storage Temp.: - 40°C to + 125°C (on board)
- (c) All test data referenced to 25°C ambient.
- (d) Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.
- (e) Saturation Current (Isat) will cause inductance L0 to drop approximately 30%.
- (f) Rated DC Current: The lower value of Irms and Isat.
- (g) Part Temperature (Ambient + Temp. Rise): Should not exceed 125°C under worst case operating conditions.
- (h) Maximum Operating Voltage: 75V
- (i) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Electrical Characteristics

Part Number	Inductance (μ H) @0A	I _{rms} (A) Typ	I _{sat} (A) Typ	DCR (m Ω)		Type
				Typ	Max	
PIC1004HR15YF	0.15	43	75	0.5	0.6	Non- Lead Frame
PIC1004HR19YF	0.19	36	70	0.6	0.9	Non- Lead Frame
PIC1004HR22MF	0.22	35	60	0.8	1.0	Non- Lead Frame
PIC1004HR24MF	0.24	34	60	0.8	1.0	Non- Lead Frame
PIC1004HR27MF	0.27	33	60	0.82	1.0	Non- Lead Frame
PIC1004HR30MF	0.30	32	60	0.94	1.1	Non- Lead Frame
PIC1004HR36MF	0.36	31	60	1.05	1.2	Non- Lead Frame
PIC1004HR39MF	0.39	30	60	1.1	1.3	Non- Lead Frame
PIC1004HR45MF	0.45	29	45	1.3	1.5	Non- Lead Frame
PIC1004HR47MF	0.47	28	43	1.3	1.5	Non- Lead Frame
PIC1004HR56MF	0.56	25	40	1.6	1.8	Non- Lead Frame
PIC1004HR68MF	0.68	22	39	2.4	2.7	Non- Lead Frame
PIC1004HR75MF	0.75	22	39	2.4	2.7	Non- Lead Frame
PIC1004HR88MF	0.88	20	38	2.5	2.9	Non- Lead Frame
PIC1004H1R0MF	1.00	18	36	3.0	3.3	Non- Lead Frame
PIC1004H1R2MF	1.20	17	33	3.3	3.8	Non- Lead Frame
PIC1004H1R5MF	1.50	16	33	4.0	4.6	Non- Lead Frame
PIC1004H1R8MF	1.80	14	30	5.3	6.4	Lead Frame
PIC1004H2R2MF	2.20	12	27	6.5	7.0	Lead Frame
PIC1004H2R5MF	2.50	11.5	23	7.9	8.7	Lead Frame
PIC1004H3R0MF	3.00	11.5	21	10	11.5	Lead Frame
PIC1004H3R3MF	3.30	11	20	10.8	11.8	Lead Frame
PIC1004H3R9MF	3.90	10.5	19	12.6	14.5	Lead Frame
PIC1004H4R0MF	4.00	10.2	18	13	15	Lead Frame
PIC1004H4R7MF	4.70	10	17	15.0	15.5	Lead Frame
PIC1004H5R6MF	5.60	9.0	14	17	19.3	Lead Frame
PIC1004H6R2MF	6.20	8.7	13.7	17.2	21.3	Lead Frame

Tolerance Code: M = \pm 20%, Y = \pm 30%

Test frequency: 1.0V/100KHz

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Part Number	Inductance (μ H) @0A	I _{rms} (A) Typ	I _{sat} (A) Typ	DCR (m Ω)		Type
				Typ	Max	
PIC1004H6R8MF	6.80	8.5	13.5	17.5	23.3	Lead Frame
PIC1004H7R3MF	7.30	8.3	13.0	19.0	21.8	Lead Frame
PIC1004H8R2MF	8.20	8.0	12.5	20	22.5	Lead Frame
PIC1004H100MF	10.0	7.5	12.0	27.0	30	Lead Frame
PIC1004H150MF	15.0	6.25	10	40	45	Lead Frame
PIC1004H180MF	18.0	5.5	9.0	56	62	Lead Frame
PIC1004H220MF	22.0	5.0	7.0	64	74	Lead Frame
PIC1004H270MF	27.0	4.0	6.0	86	100	Lead Frame
PIC1004H330MF	33.0	3.5	5.0	92	112	Lead Frame
PIC1004H470MF	47.0	3.0	4.5	145	167	Lead Frame
PIC1004H680MF	68.0	2.0	3.0	205	240	Lead Frame


Tolerance Code: M= \pm 20%, Y= \pm 30%

Test frequency: 1.0V/100KHz


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curve


PIC1004HR15YF

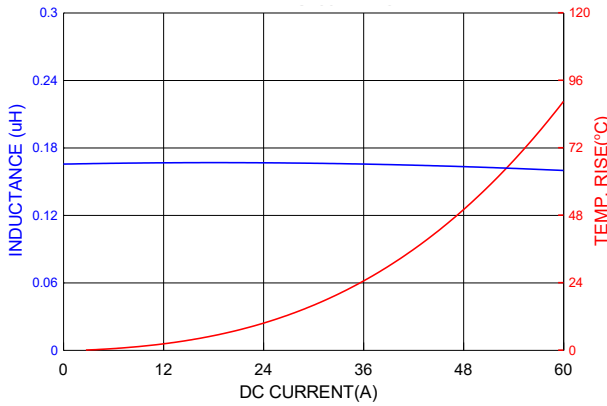


PIC1004HR19YF

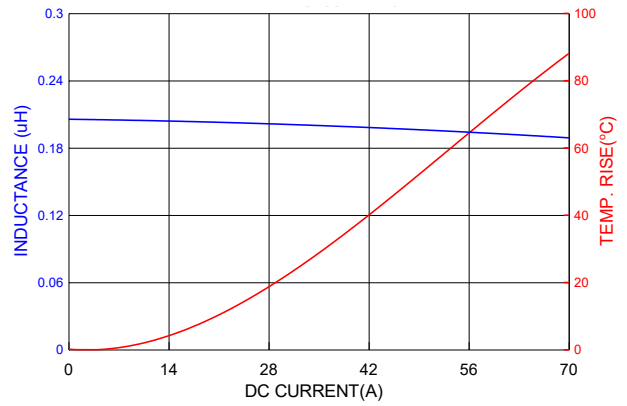


PIC1004HR22MF

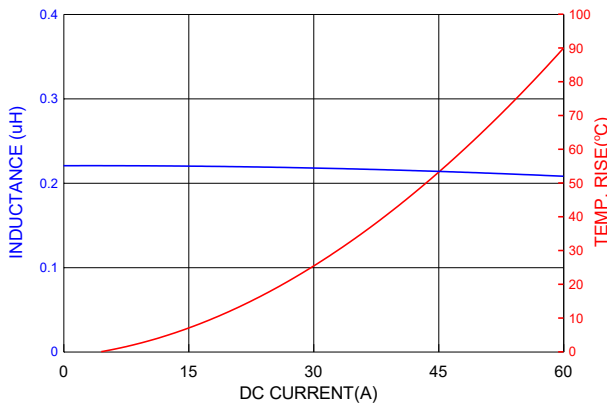


PIC1004HR24MF

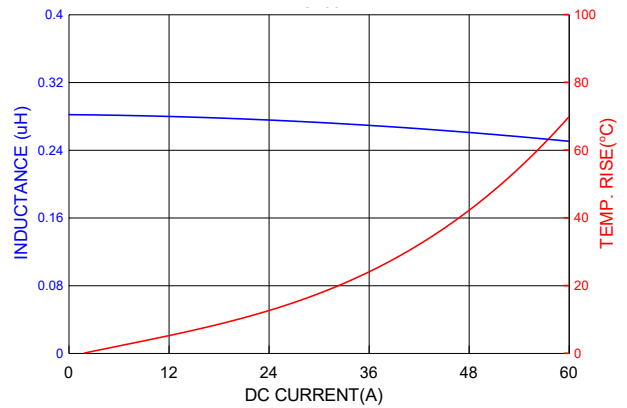

PIC1004HR27MF

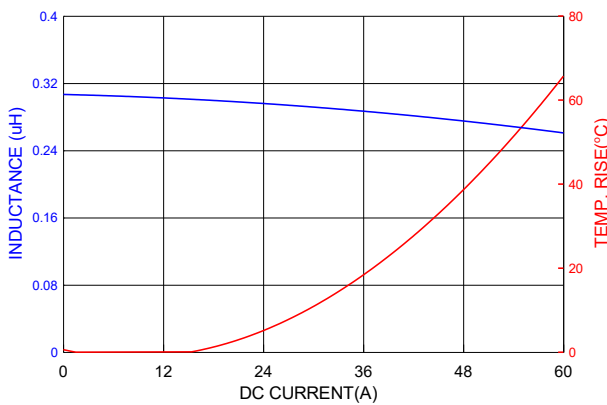


PIC1004HR30MF

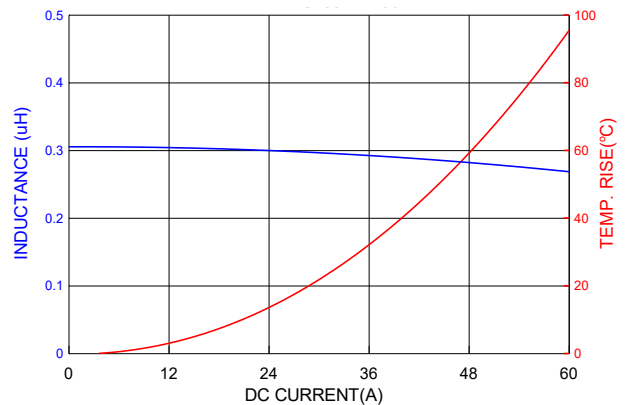


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1004HR36MF

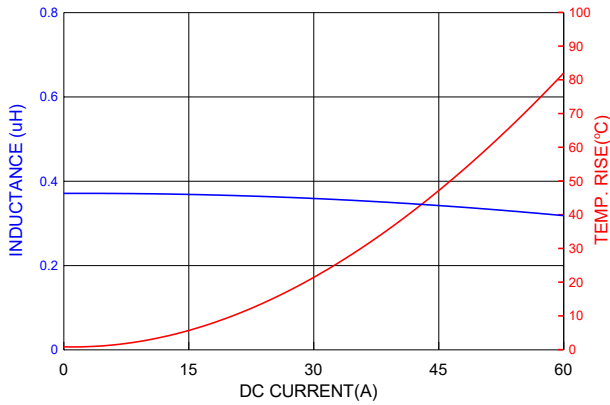


PIC1004HR39MF

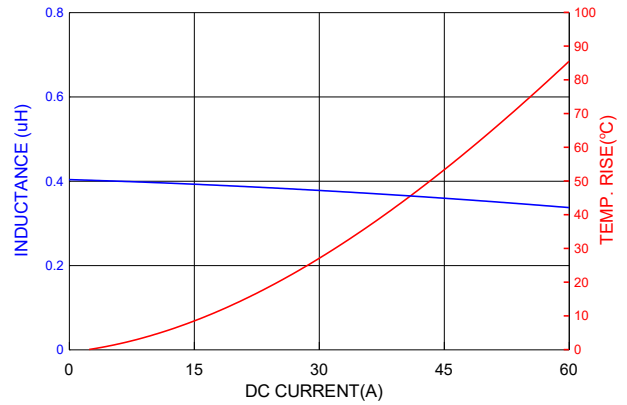


PIC1004HR45MF

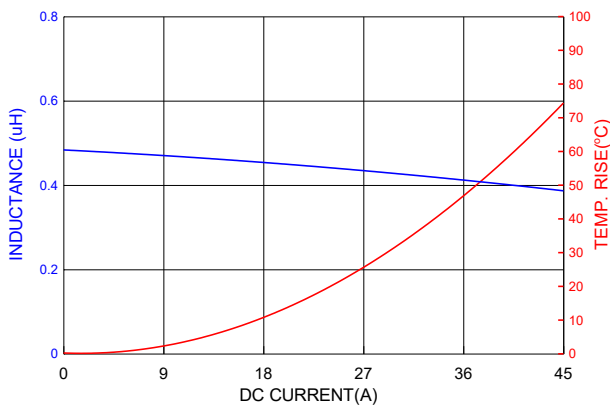


PIC1004HR47MF

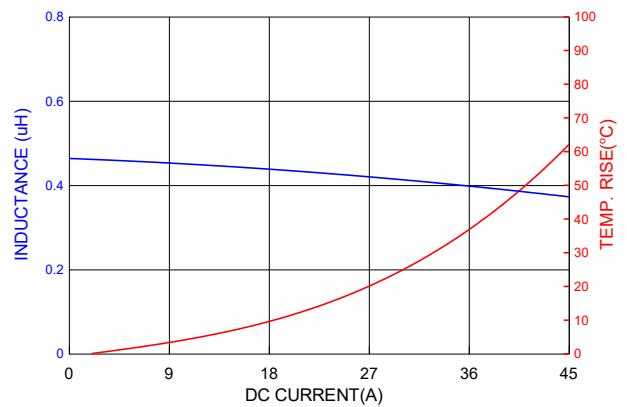

PIC1004HR56MF

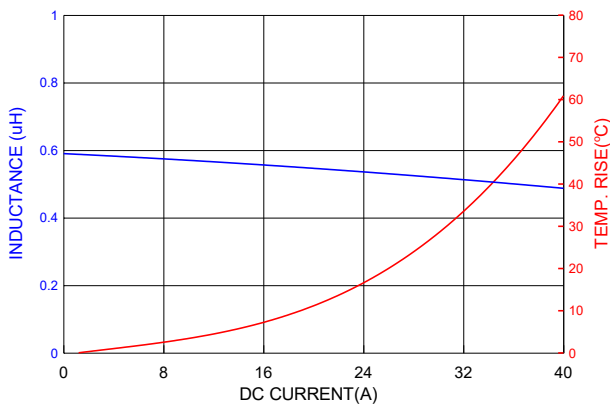


PIC1004HR68MF

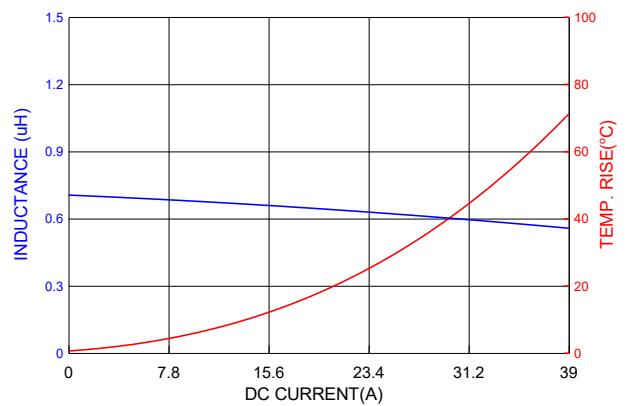


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1004HR75MF

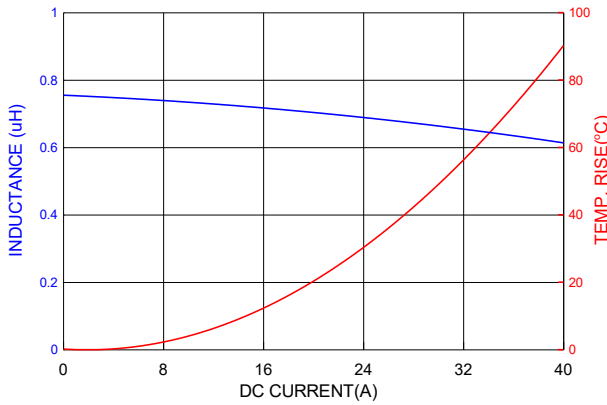


PIC1004HR88MF

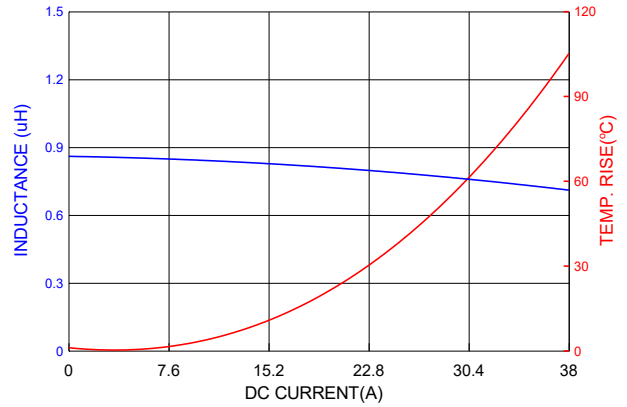


PIC1004H1R0MF

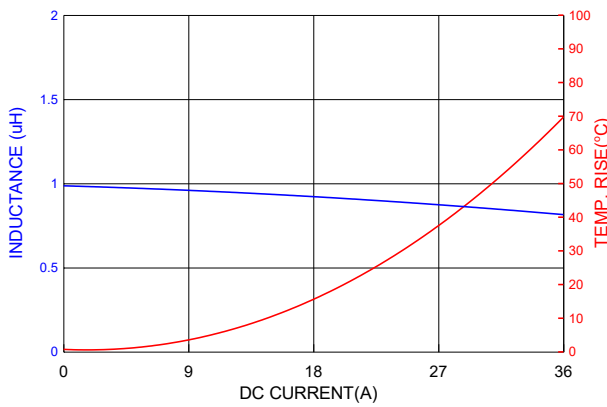


PIC1004H1R2MF

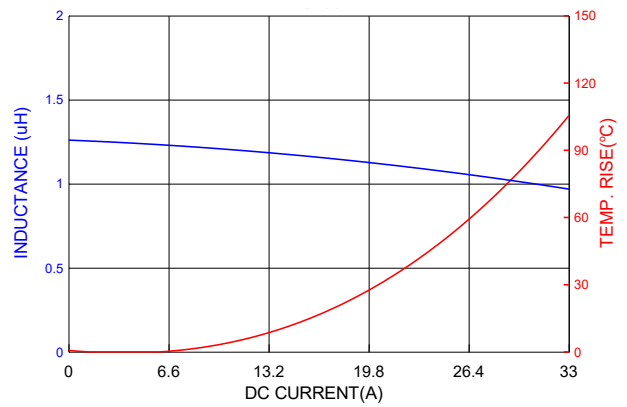

PIC1004H1R5MF

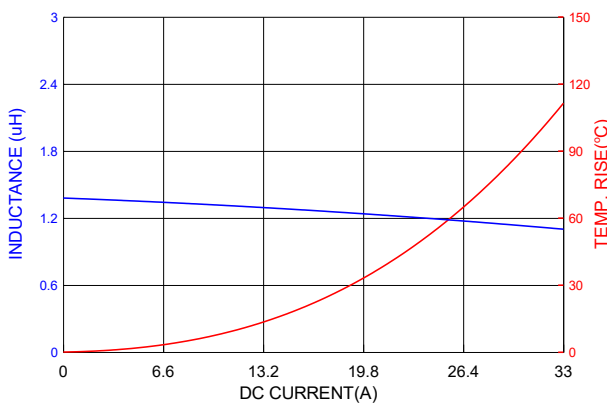


PIC1004H1R8MF

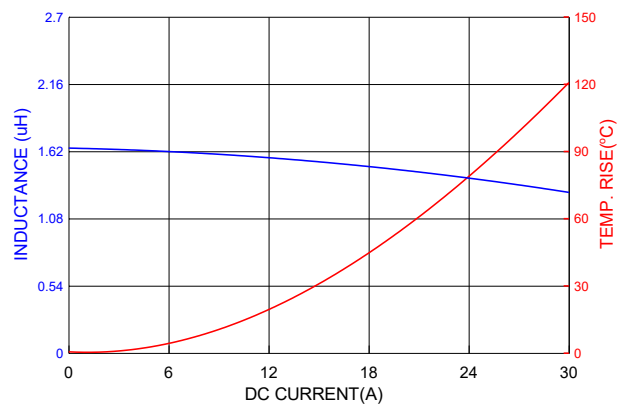


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1004H2R2MF

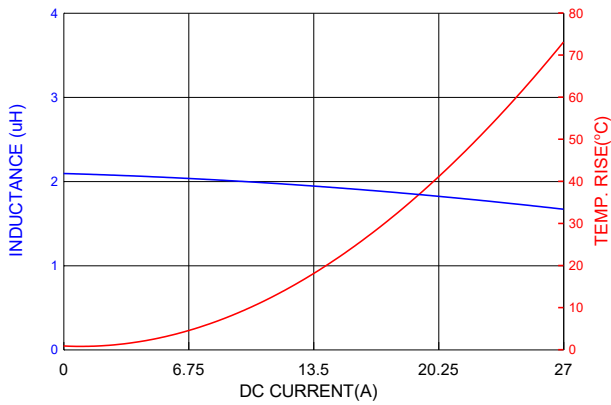


PIC1004H2R5MF

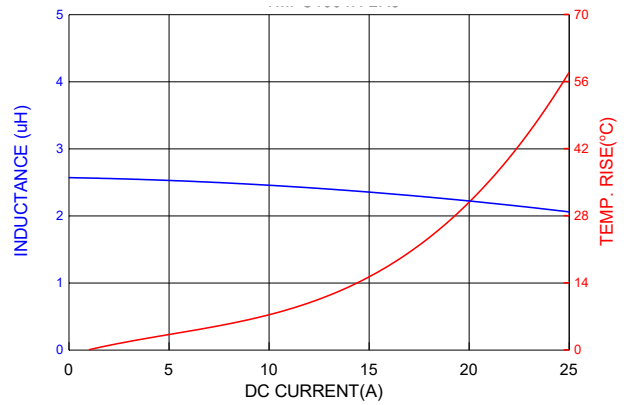


PIC1004H3R0MF

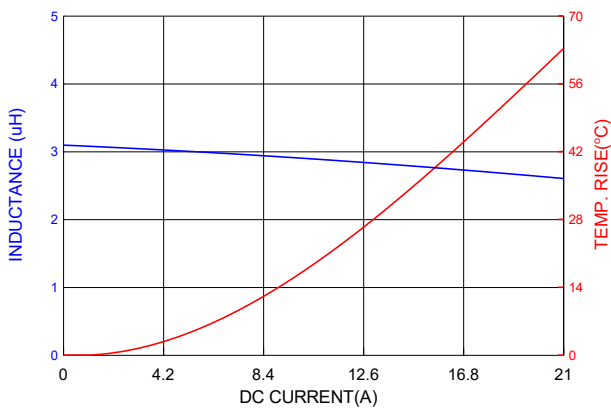


PIC1004H3R3MF

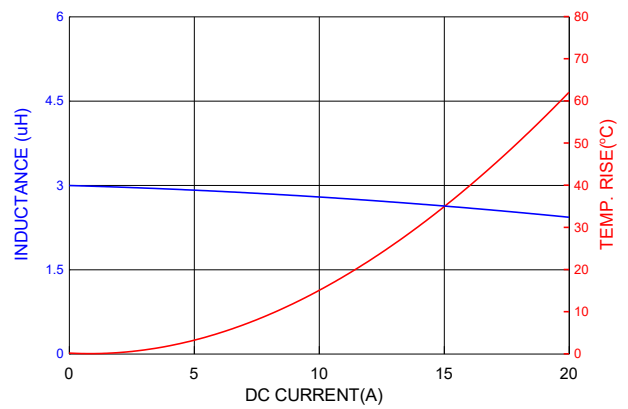







PIC1004H3R9MF

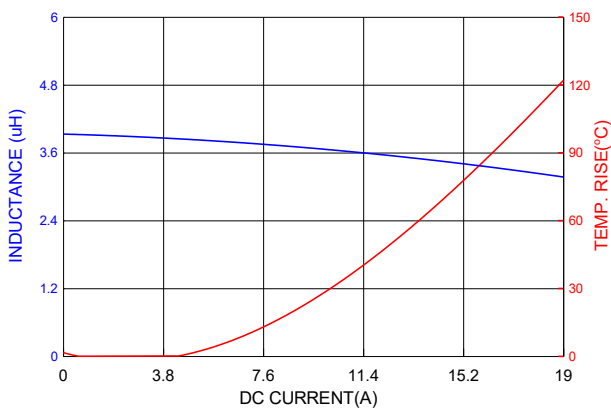

PIC1004H4R0MF

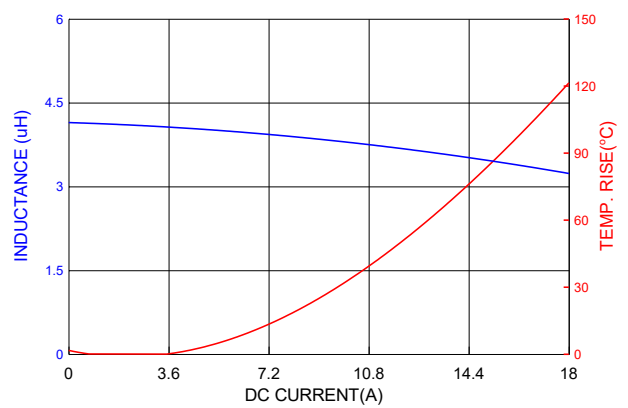


NOTE: Specifications subject to change without notice. Please check our website for latest information.

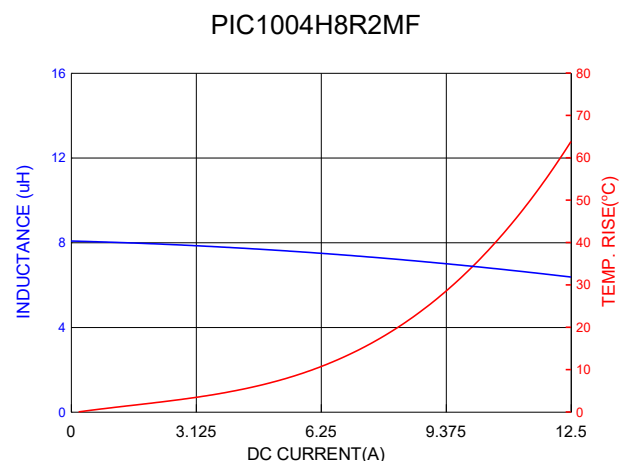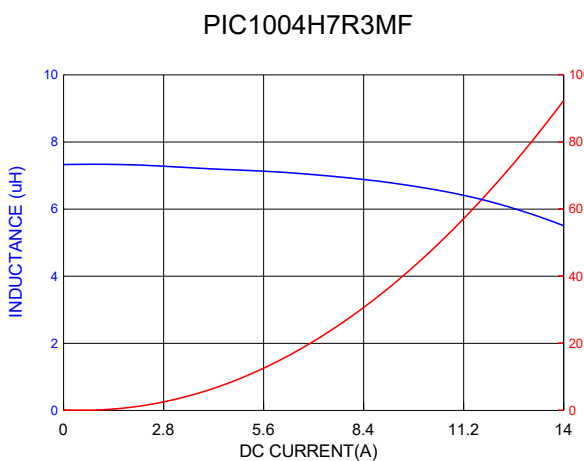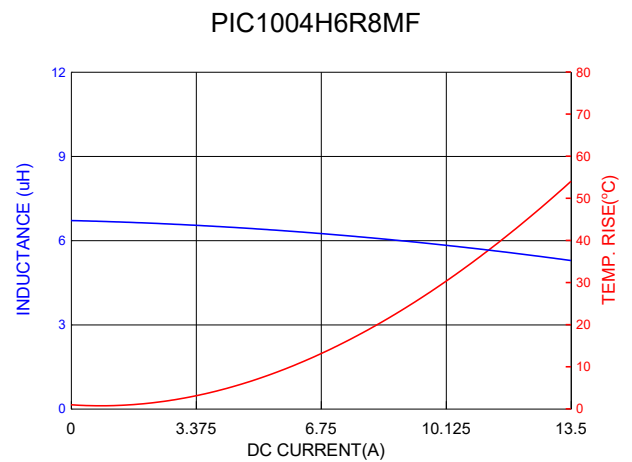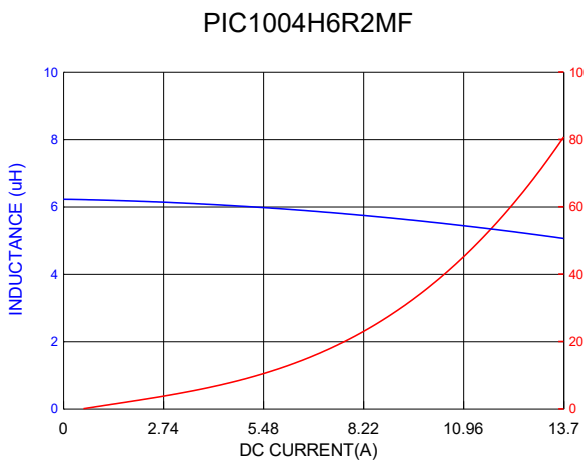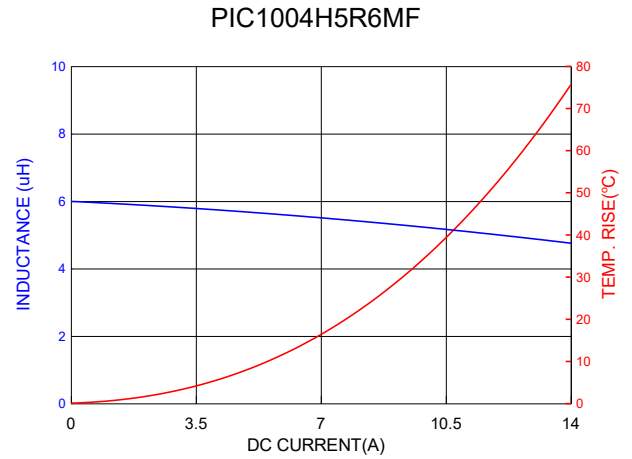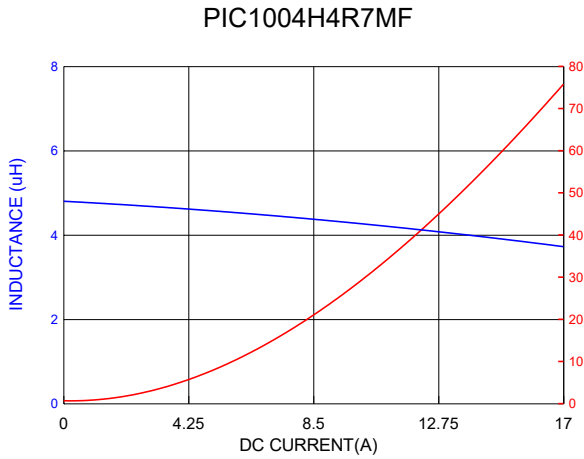


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1004H100MF

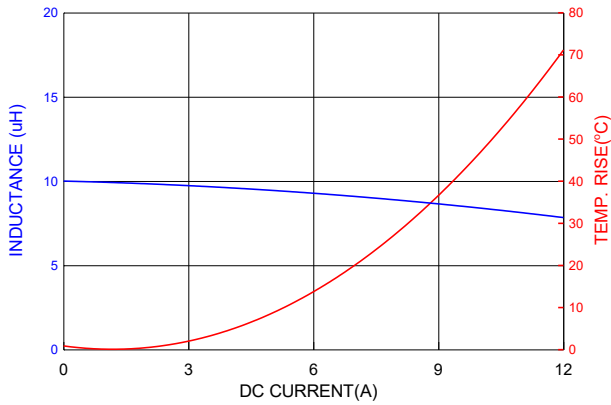


PIC1004H150MF

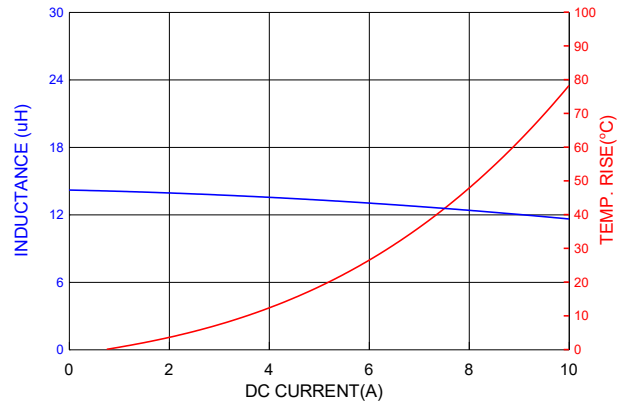


PIC1004H180MF

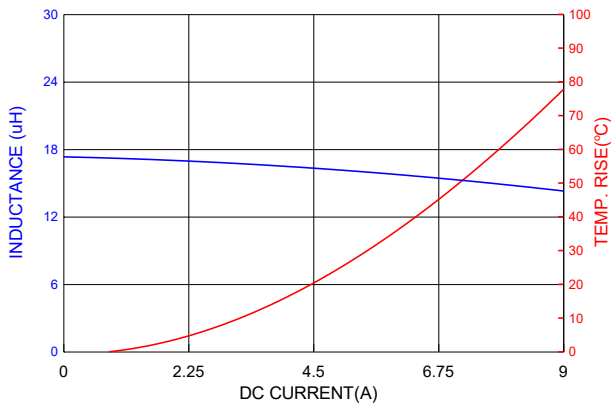


PIC1004H220MF

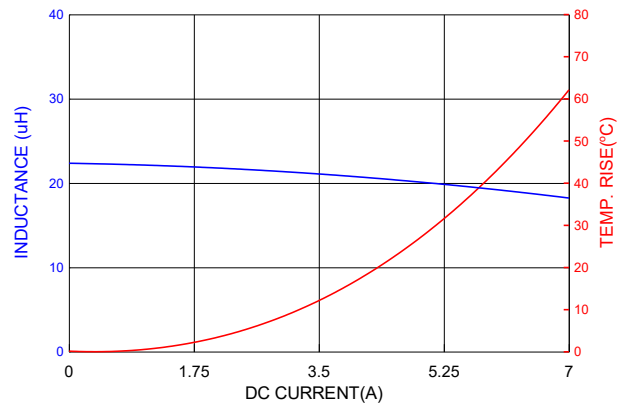

PIC1004H270MF

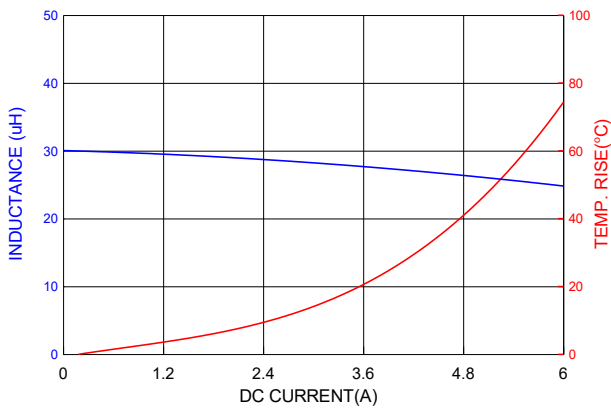


PIC1004H330MF

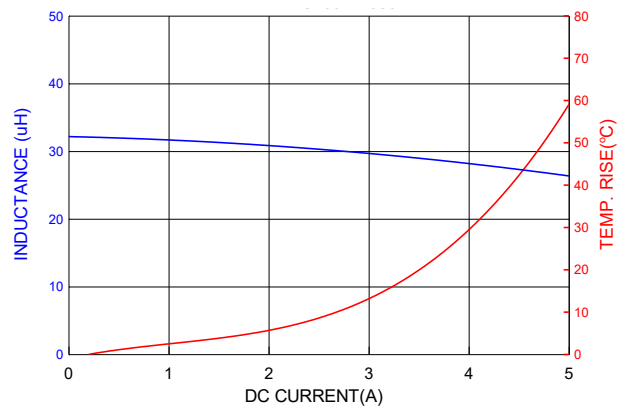


NOTE: Specifications subject to change without notice. Please check our website for latest information.

PIC1004H470MF

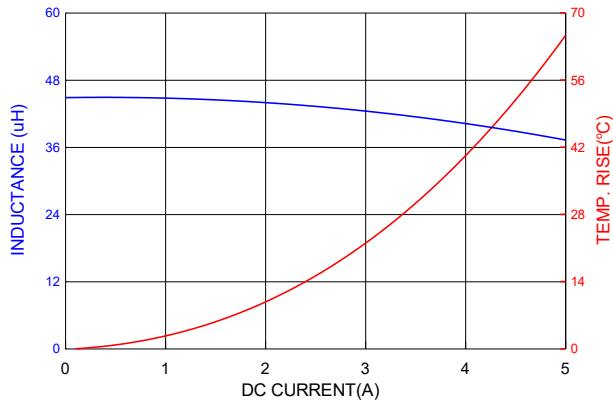

PIC1004H680MF

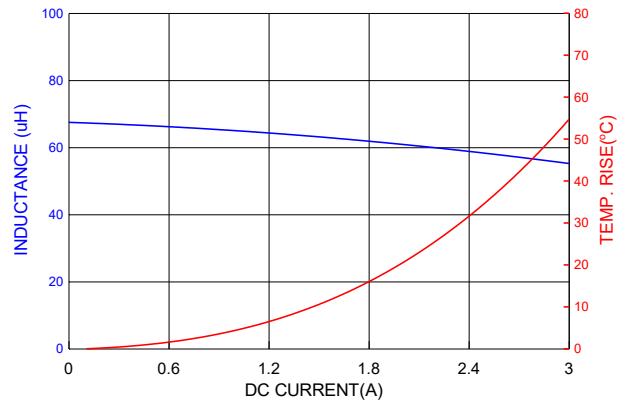

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

8-2. Iron Reflow


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).

Note:

- (a) Preheat circuit and products to 150°C.
- (b) 350°C tip temperature (Max.)
- (c) Never contact the ceramic with the iron tip
- (d) 1.0mm tip diameter (Max.)
- (e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- (f) Limit soldering time to 4~5 sec.

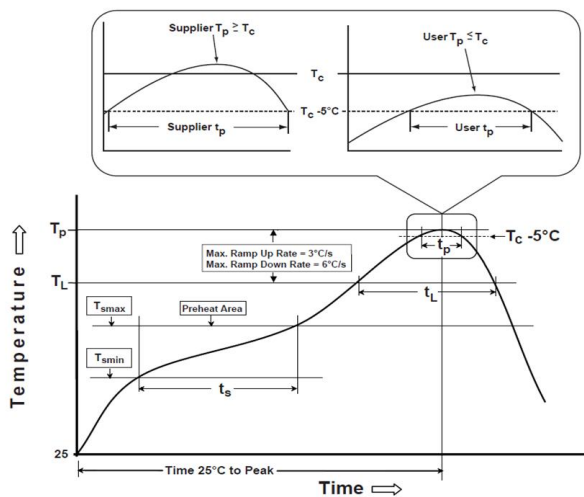

Reflow times: 3 times Max
Figure 1: IR Soldering Reflow

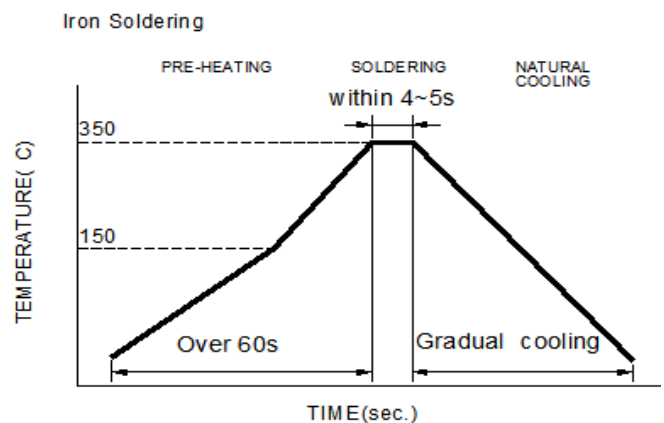

Iron Soldering times : 1 times max
Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	< 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p: maximum peak package body temperature, **T_c**: the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c**.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

8-3. Soldering Volume

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below.


Minimum fillet height = soldering thickness + 25% product height.

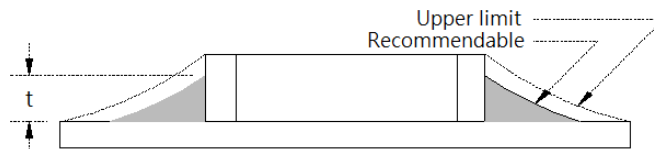

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

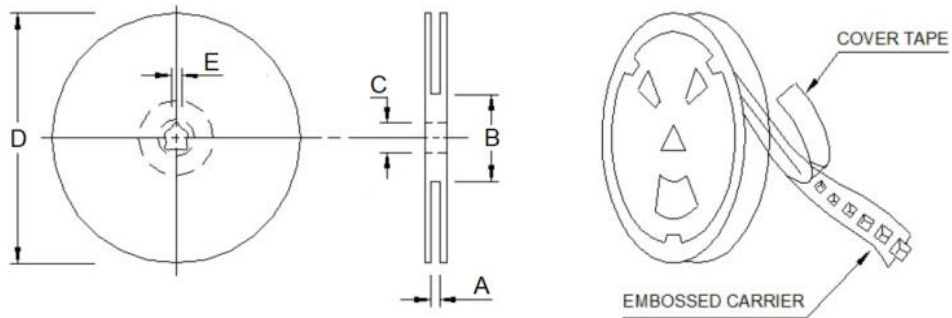

Type	A	B	C	D	E
13"x24mm	24.4 Ref	100.0 Ref	13.0 Ref	330.0 Ref	2.0 Ref

9-2. Tape Dimension (Unit: mm)

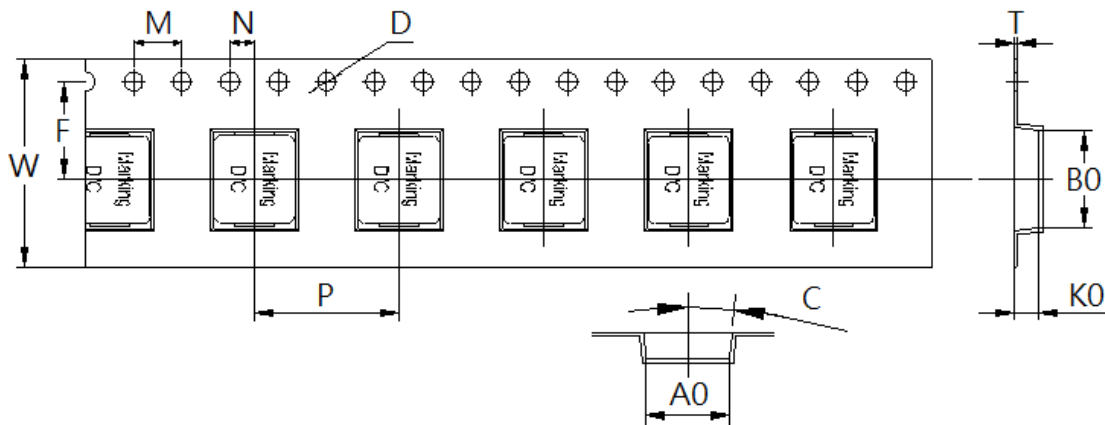


B0	A0	K0	P	W	F
11.60±0.10	10.40±0.10	4.50±0.10	16.00±0.10	24.00±0.30	11.50±0.10
T	D	M	N	C	-
0.35±0.05	1.50±0.10	4.00 Ref	2.00 Ref	3°	-

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Quantity (Unit: Pcs)

Chip/ Reel	500
Inner box	1,000
Carton	4,000

9-4. Tearing Off Force

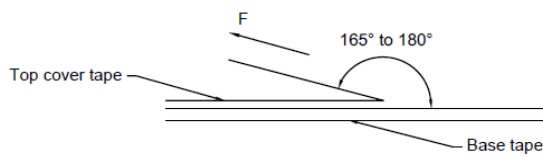

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.