


1. Part No. Expression

P D B 1 0 0 5 1 R 0 M Z F

(a) (b) (c) (d) (e) (f)

- (a) Series Code
- (b) Dimension Code
- (c) Inductance Code
- (d) Tolerance Code
- (e) Special Code
- (f) Packaging Code

2. Configuration & Dimensions (Unit: mm)

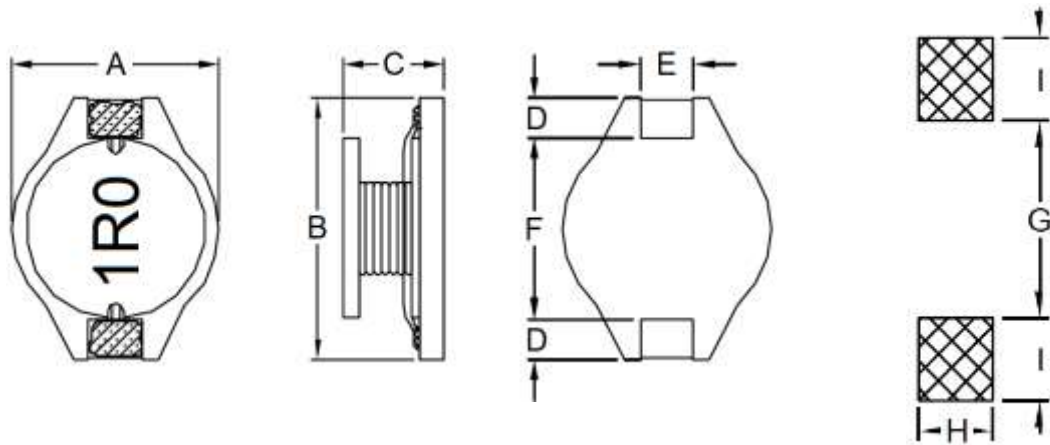


Recommended PCB Layout

- Note: 1. The above PCB layout reference only.
2. Marking: Inductance Code


A	B	C	D	E
10.0±0.2	12.7±0.2	5.0±0.3	2.4±0.2	2.2±0.2
F	G	H	I	-
7.6±0.3	7.3 Ref	2.8 Ref	3.0 Ref	-

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

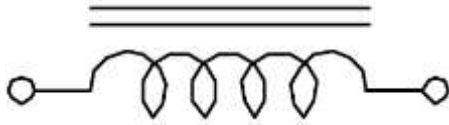

4. Material List

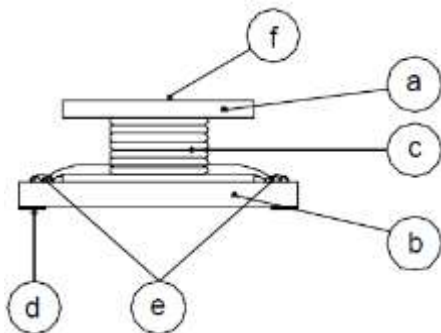

- (a) Core
- (b) Base
- (c) Wire
- (d) Terminal
- (e) Adhesive
- (f) Ink

5. General Specifications

- (a) Operating Temp.: -40°C to +85°C (including self-temperature rise)
- (b) All test data referenced to 25°C ambient.
- (c) Heat Rated Current (I_{rms}) will cause the coil temperature rise ΔT of 40°C Max.
- (d) Saturation Current (I_{sat}) will cause inductance L₀ to approximately drop 10%.
- (e) Rated Current: The lower value of I_{sat} and I_{rms}.
- (f) Resistance to solder heat : 260° C.10 secs
- (g) Storage Condition (Component in its packaging)
 - i) Temperature: -10°C to 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.


6. Electrical Characteristics

Part Number	Inductance (uH) @0A ±20%	Q Ref	Test Frequency	SRF (MHz) Typ	DCR (mΩ) Max	IDC (A)
PDB10051R0MZF	1.0	50	1V/100KHz	150.0	9	6.8
PDB10051R5MZF	1.5	50	1V/100KHz	100.0	10	6.4
PDB10052R2MZF	2.2	45	1V/100KHz	85.0	12	6.1
PDB10053R3MZF	3.3	35	1V/100KHz	60.0	15	5.4
PDB10054R7MZF	4.7	35	1V/100KHz	45.0	18	4.8
PDB10056R8MZF	6.8	35	1V/100KHz	35.0	27	4.4
PDB1005100MZF	10.0	30	1V/100KHz	25.0	38	3.9
PDB1005150MZF	15.0	30	1V/100KHz	20.0	46	3.1
PDB1005220MZF	22.0	25	1V/100KHz	18.0	85	2.7
PDB1005330MZF	33.0	30	1V/100KHz	14.0	100	2.1
PDB1005470MZF	47.0	20	1V/100KHz	11.0	140	1.8
PDB1005680MZF	68.0	35	1V/100KHz	10.0	200	1.5
PDB1005101MZF	100.0	40	1V/100KHz	7.0	280	1.3
PDB1005151MZF	150.0	40	1V/100KHz	6.5	400	1.0
PDB1005221MZF	220.0	40	1V/100KHz	5.0	610	0.8
PDB1005331MZF	330.0	60	1V/100KHz	4.0	1020	0.6
PDB1005471MZF	470.0	50	1V/100KHz	3.0	1270	0.5
PDB1005681MZF	680.0	65	1V/100KHz	2.5	2020	0.4
PDB1005102MZF	1000.0	60	1V/100KHz	2.0	3000	0.3


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curves


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

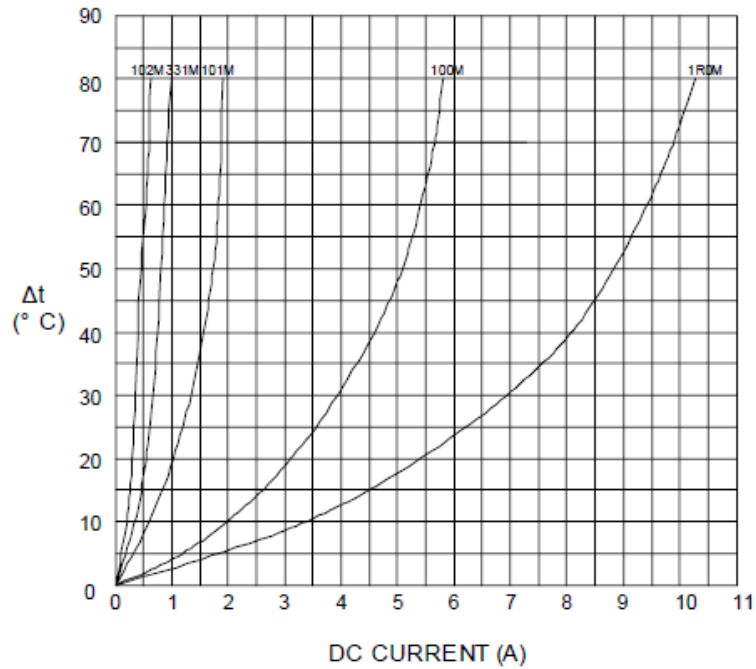

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

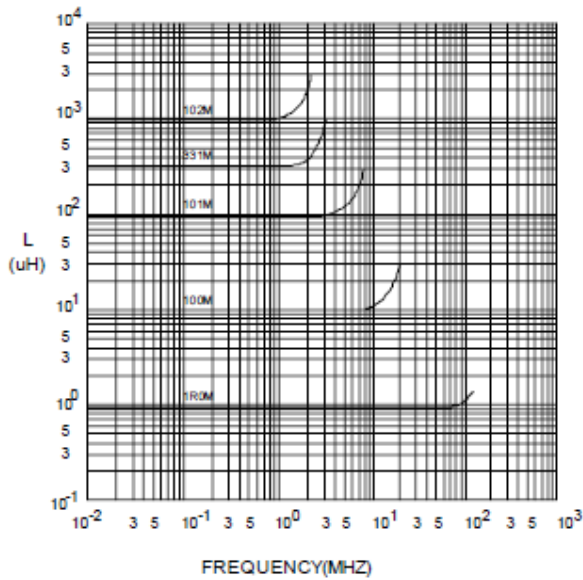

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

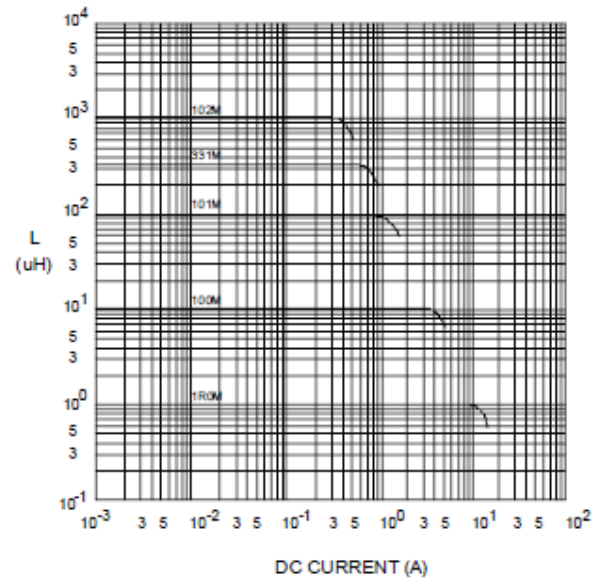

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

8-2. Iron Reflow


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).

Note:

- (a) Preheat circuit and products to 150°C.
- (b) 350°C tip temperature (Max.)
- (c) Never contact the ceramic with the iron tip
- (d) 1.0mm tip diameter (Max.)
- (e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- (f) Limit soldering time to 4~5 sec.

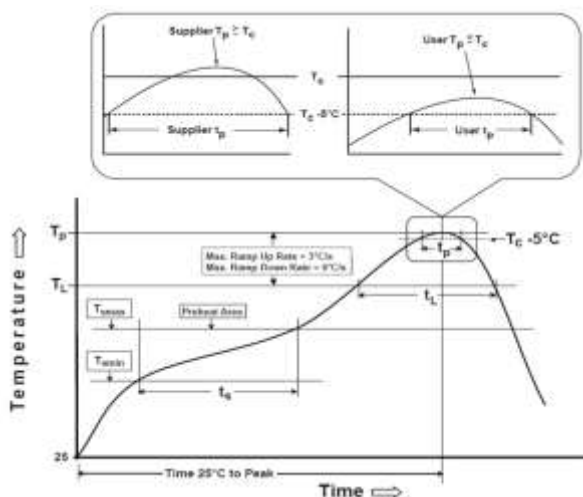

Reflow times: 3 times Max
Figure 1: IR Soldering Reflow

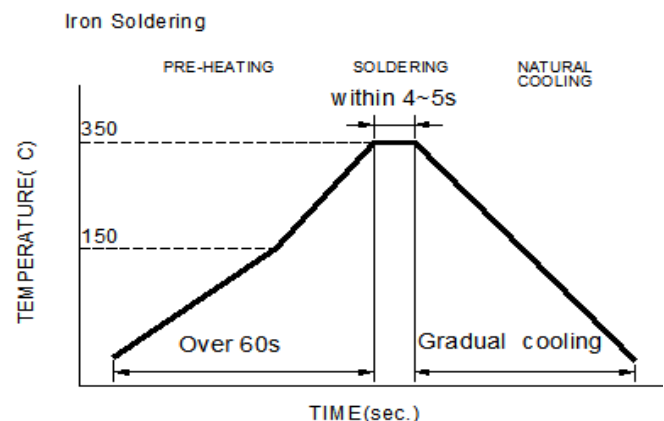

Iron Soldering times : 1 times max
Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	< 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p: maximum peak package body temperature, **T_c**: the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c**.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)

	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

8-3. Soldering Volume


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below. Minimum fillet height = soldering thickness + 25% product height.



NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

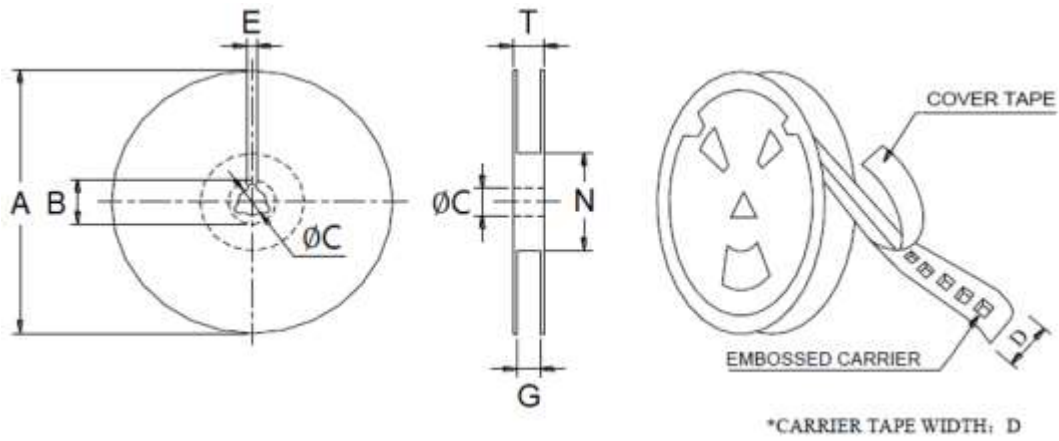

Type	A	B	C	D
	330.0 Ref	21.0 Ref	13.0 Ref	24.0 Ref
13"x24mm	E	G	N	T
	2.0 Ref	26.0 Max	50.0 Min	30.4 Ref

9-2. Tape Dimension (Unit: mm)

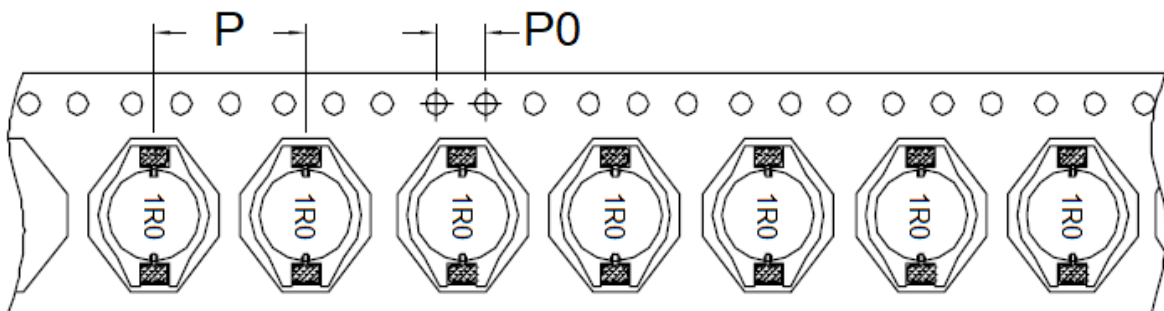


P	P0
16	4

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Type

INNER : REEL			OUTER : CARTON		
Q'TY(PCS)	G.W. (gw)	STYLE	Q'TY(PCS)	G.W. (Kg)	SIZE(cm)
600	1,100	13-24	2,400	7.9	40 x 40 x 24

9-4. Tearing Off Force

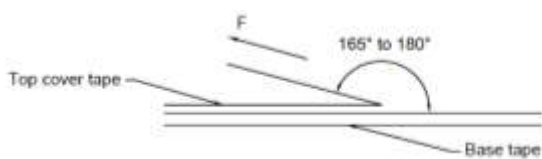

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.