


## 1. Part No. Expression

**S D B 0 7 0 5 1 0 0 M Z F**

(a) (b) (c) (d) (e) (f)

- |                     |                    |
|---------------------|--------------------|
| (a) Series Code     | (d) Tolerance Code |
| (b) Dimension Code  | (e) Special Code   |
| (c) Inductance Code | (f) Packaging Code |

## 2. Configuration & Dimensions (Unit: mm)

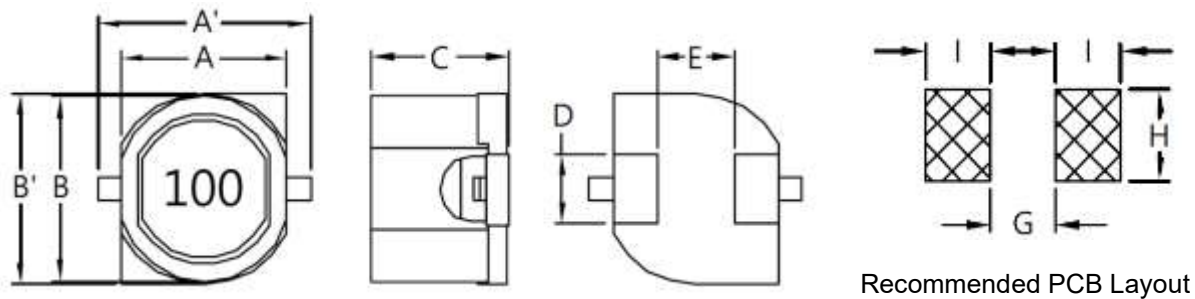


- Note: 1. The above PCB layout reference only.  
2. Marking: Inductance Code


A'	A	B'	B	C
10.5 Max	7.0 Ref	8.0±0.3	7.8 Ref	5.7±0.3
D	E	G	H	I
3.0±0.2	3.7±0.3	2.8 Ref	3.9 Ref	2.8 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

## 3. Schematic



## 4. Material List

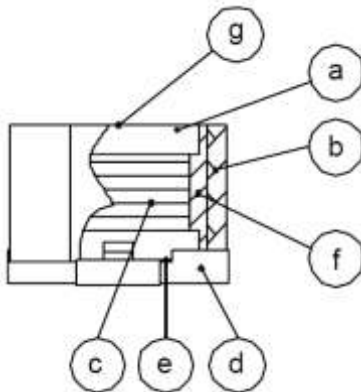

- (a) DR Core
- (b) RI Core
- (c) Wire
- (d) Base
- (e) Terminal
- (f) Adhesive
- (g) Ink

## 5. General Specifications

- (a) Operating Temp.:  $-40^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$  (including self-temperature rise)
- (b) All test data referenced to  $25^{\circ}\text{C}$  ambient.
- (c) Heat Rated Current ( $I_{rms}$ ) will cause the coil temperature rise  $\Delta T$  of  $50^{\circ}\text{C}$  Max.
- (d) Saturation Current ( $I_{sat}$ ) will cause inductance  $L_0$  to drop approximately 10%.
- (e) Rated Current: The lower value of  $I_{sat}$  and  $I_{rms}$ .
- (f) Resistance to solder heat:  $260^{\circ}\text{C}$ , 10 secs
- (g) Storage Condition (Component in its packaging)
  - i) Temperature:  $-10^{\circ}\text{C}$  to  $40^{\circ}\text{C}$
  - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.


## 6. Electrical Characteristics

Part Number	Inductance ( $\mu$ H) @0A $\pm 20\%$	Test Frequency	RDC ( $\Omega$ ) Max	IDC (A)
SDB0705100MZF	10	1V/1KHz	0.05	1.60
SDB0705120MZF	12	1V/1KHz	0.06	1.50
SDB0705150MZF	15	1V/1KHz	0.07	1.40
SDB0705180MZF	18	1V/1KHz	0.08	1.30
SDB0705220MZF	22	1V/1KHz	0.10	1.10
SDB0705270MZF	27	1V/1KHz	0.10	1.00
SDB0705330MZF	33	1V/1KHz	0.15	0.92
SDB0705390MZF	39	1V/1KHz	0.15	0.84
SDB0705470MZF	47	1V/1KHz	0.20	0.76
SDB0705560MZF	56	1V/1KHz	0.25	0.68
SDB0705680MZF	68	1V/1KHz	0.30	0.63
SDB0705820MZF	82	1V/1KHz	0.30	0.58
SDB0705101MZF	100	1V/1KHz	0.40	0.50
SDB0705121MZF	120	1V/1KHz	0.45	0.46
SDB0705151MZF	150	1V/1KHz	0.55	0.40
SDB0705181MZF	180	1V/1KHz	0.70	0.38
SDB0705221MZF	220	1V/1KHz	0.75	0.36


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curve


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

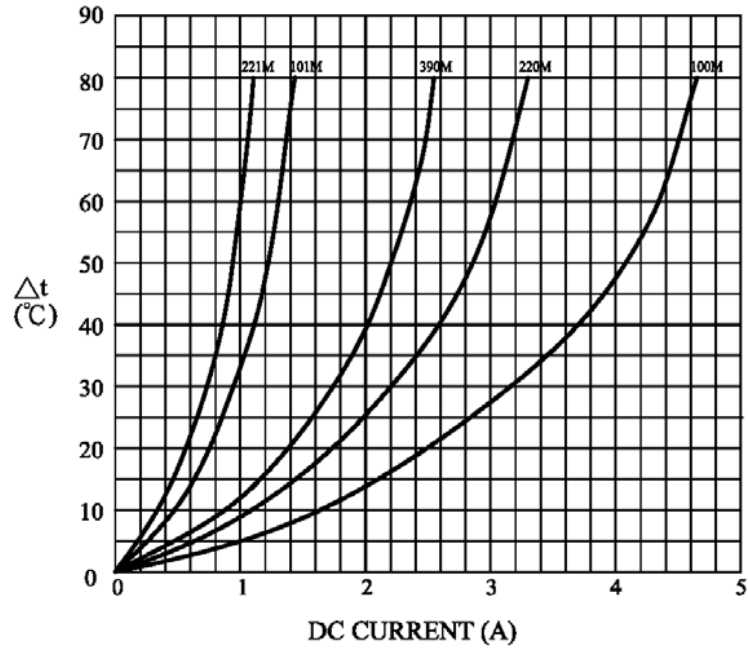

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

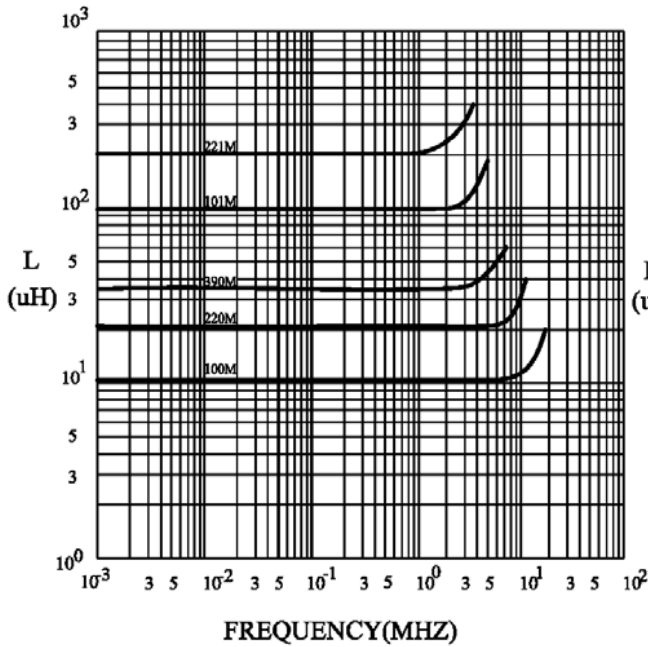

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

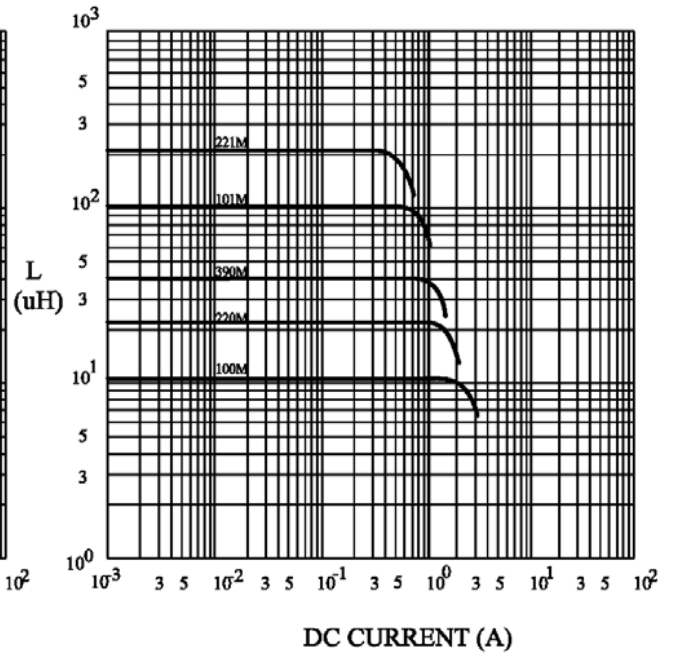

NOTE: Specifications subject to change without notice. Please check our website for latest information.

**8. Soldering Specification**

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

**8-1. IR Soldering Reflow**

Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

**8-2. Iron Reflow**

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- (a) Preheat circuit and products to 150°C.
- (b) 350°C tip temperature (Max.)
- (c) Never contact the ceramic with the iron tip
- (d) 1.0mm tip diameter (Max.)
- (e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- (f) Limit soldering time to 4~5 sec.



Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

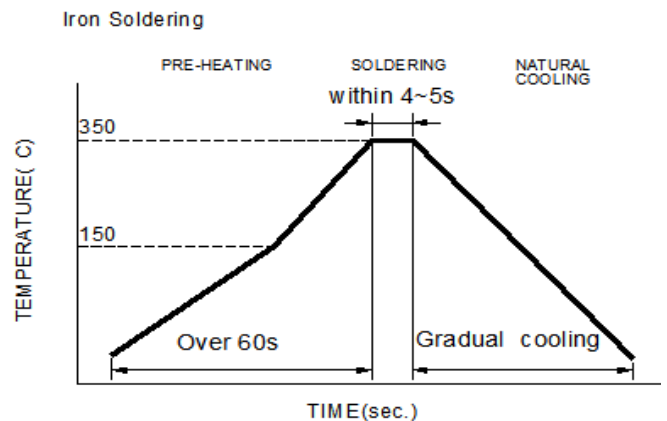

Iron Soldering times : 1 times max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

**Table (1.1) Reflow Profiles**

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min ( $T_{smin}$ )	150°C
-Temperature Max ( $T_{smax}$ )	200°C
-Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C /second max.
Liquids temperature ( $T_L$ )	217°C
Time ( $t_L$ ) maintained above $T_L$	60-150 seconds
Classification temperature ( $T_c$ )	See Table (1.2)
Time ( $t_p$ ) at $T_c - 5^\circ\text{C}$ ( $T_p$ should be equal to or less than $T_c$ .)	< 30 seconds
Ramp-down rate ( $T_p$ to $T_L$ )	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

**T<sub>p</sub>**: maximum peak package body temperature, **T<sub>c</sub>**: the classification temperature.

For user (customer) **T<sub>p</sub>** should be equal to or less than **T<sub>c</sub>**.

**Table (1.2) Package Thickness/Volume and Classification Temperature ( $T_c$ )**

	Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

### 8-3. Soldering Volume

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below.


Minimum fillet height = soldering thickness + 25% product height.



NOTE: Specifications subject to change without notice. Please check our website for latest information.


## 9. Packaging Information

### 9-1. Reel Dimension (Unit: mm)

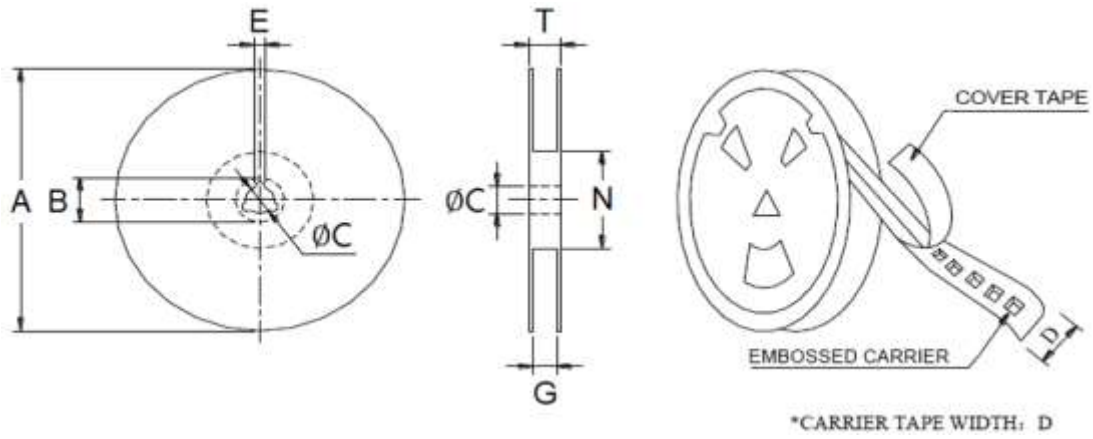

Type	A	B	C	D
	330.0 Ref	21.0 Ref	13.0 Ref	16.0 Ref
13"x16mm	E	G	N	T
	2.0 Ref	26.0 Max	50.0 Min	30.4 Ref

### 9-2. Tape Dimension (Unit: mm)

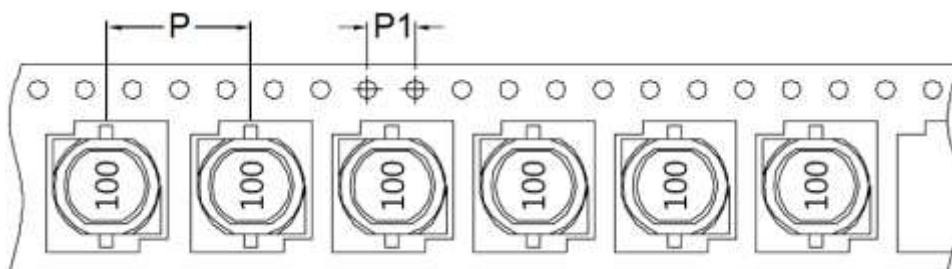


P	P1
12	4

NOTE: Specifications subject to change without notice. Please check our website for latest information.

### 9-3. Packaging Quantity & G.W & Size

INNER : REEL			OUTER : CARTON		
QTY(PCS)	G.W(gw)	STYLE	QTY(PCS)	G.W(Kg)	SIZE(cm)
900	1710	13-16	5400	13.8	40x40x24

### 9-4. Tearing Off Force

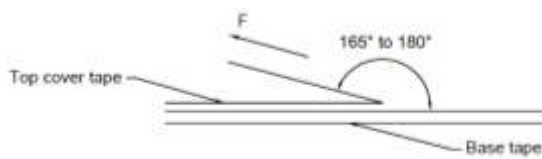

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

## Application Notice

#### 1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

#### 2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.