P0

1. Part No. Expression:

<u>ZQ2K300-RN-10</u>


(a) (b)(c) (d) (e)(f) (g)

- (a) Series Code
- (b) Dimension Code
- (c) Material Code
- (d) Impedance Code

(e) Packaging Code(f) Current Code


(g) Internal Code

2. Configuration & Dimensions:

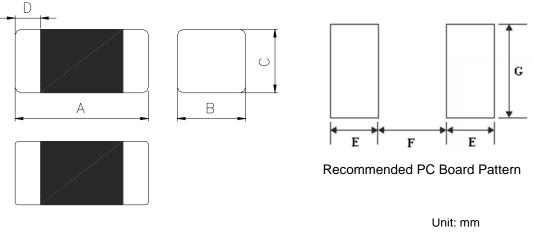

A	В	С	D	E	F	G
1.60±0.15	0.80±0.15	0.80±0.15	0.30±0.20	0.80 Ref.	0.85 Ref.	0.95 Ref.

3. Material List:

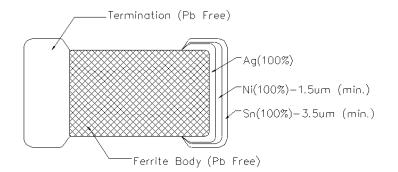

4. General Specifications:

(a) Operating Temp. : -55°C to +150°C (Including self-temperature rise).

(b) Storage Temp. : -55°C to +150°C (on board).

(c) Products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.

(d) Temperature Rise. : 40° C Max. At Rated Current \ge 1A.

(e) Storage Condition (Component in its packaging)

- i) Temperature: Less than 40°C.
- ii) Humidity: 60% RH.


5. Electrical Characteristics:

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) Max.	Rated Current (mA) Max.
ZQ2K300 - RN - 10	30±25%	100	0.04	3000
ZQ2K800 - RN - 10	80±25%	100	0.04	3000
ZQ2K121 - RL - 10	120±25%	100	0.10	2000
ZQ2K151 - RL - 10	150±25%	100	0.10	2000
ZQ2K221 - RL - 10	220±25%	100	0.10	2000
ZQ2K301 - RJ - 10	300±25%	100	0.20	1000
ZQ2K471 - RJ - 10	470±25%	100	0.20	1000
ZQ2K601 - RJ - 10	600±25%	100	0.20	1000

NOTE: Specifications subject to change without notice. Please check our website for latest information.

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

6. Characteristics Curves:

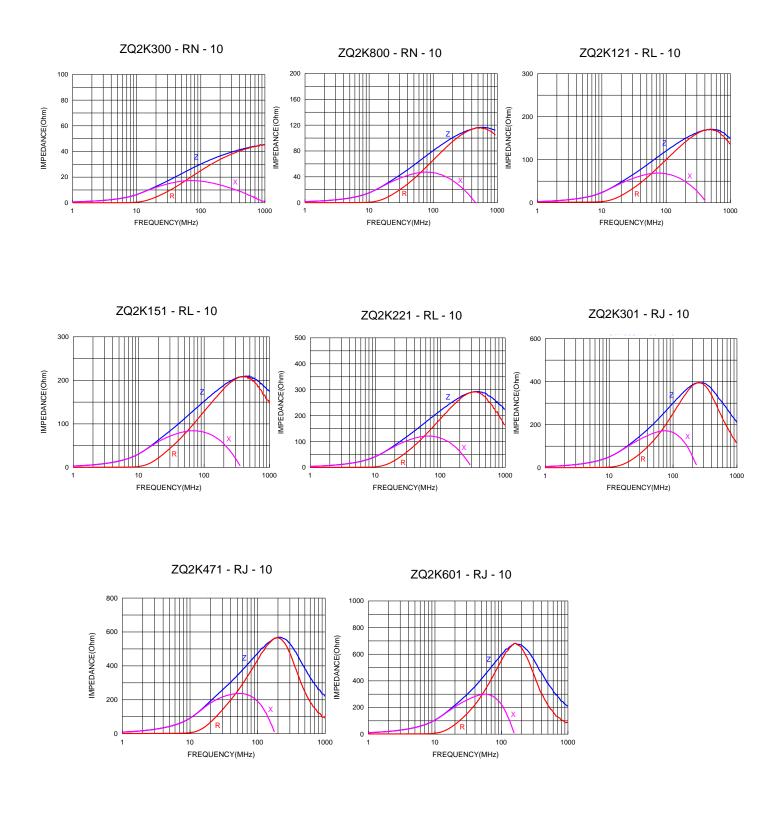

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Proprietary and Confidential Document of Superworld

0710/2019

7. Soldering and Mounting:

Mildly activated rosin fluxes are preferred. Our terminations are suitable for all re-flow soldering systems. If

hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

Note:

If wave soldering is used, there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk

7-1 Solder Re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.


7-2 Soldering Iron (Figure 2):

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the

event that a soldering iron must be employed the following precautions are recommended.


Note:

- a) Preheat circuit and products to 150°C.
- b) 350°C tip temperature (Max.)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (Max.)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4~5 sec.

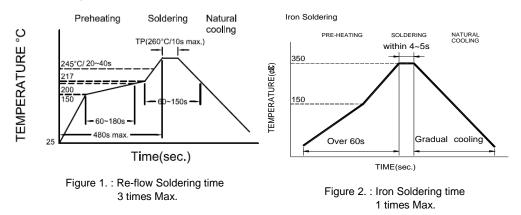

7-3 Soldering Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeding as shown in the Figure below. Minimum fillet height = soldering thickness + 25% product height.



SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司


8. Packaging Information:

8-1 Reel Dimension

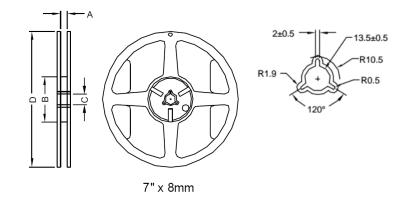

Туре	A(mm)	B(mm)	C(mm)	D(mm)
7"x8mm	9.0±0.5	60.0±2.0	13.5±0.5	178.0±2.0

8-2 Tape Dimension

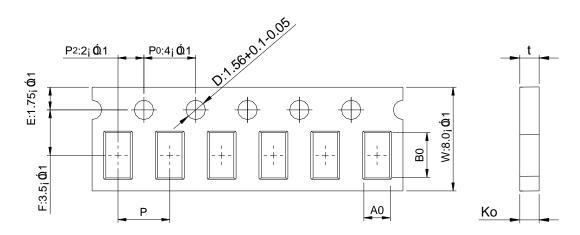


Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
ZQ2K	1.80±0.05	0.96 +0.05/-0.03	0.95±0.05	4.00±0.1	0.95±0.05

Ρ5

8-3 Packaging Quantity

Chip Size	ZQ2K	
Chip/Reel	4000	
Inner Box	20000	
Middle Box	100000	
Carton	200000	

8-4 Tearing Off Force



The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice:

1. Storage Conditions:

To maintain the solderability of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.
- 2. Transportation:
 - a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.

SUPERWORLD ELECTRONICS (S) PTE LTD 西普爾電子(新)私营有限公司

- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized.