### 1. Part No. Expression

# STXQ5050046R3 K MA11


- (a)
- (b)
- (c) (d)

(e)

(a) Series Code

- (d) Tolerance Code
- (b) Dimension Code
- (e) Internal Code
- (c) Inductance Code

### 2. Configuration & Dimensions (Unit: mm)

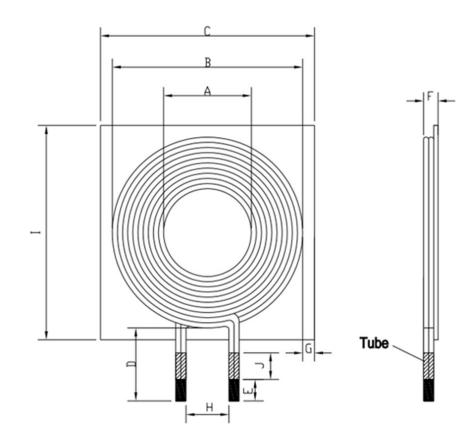


Α	В	С	D	E	F	G	Н	I	J
20.5±0.5	44.0±1.5	50.0±0.6	17.0±2.0	5.0±2.0	4.0 Max	2.0 Min	10.0 Ref	50.0±0.6	8.0 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

#### 3. Schematic



#### 4. Material List



- (a) Ferrite Sheet
- (b) Adhesive
- (c) Wire
- (d) Tube
- (e) Solder

## 5. General Specifications

- (a) Reliability test for this part meets AEC-Q200 standard.
- (b) Compatible with Qi standard MP-A11 design.
- (c) Operating Temp.: -40°C to +125°C (including self-temperature rise)
- (d) Storage Temp.: -40°C to +125°C (on board)
- (e) Heat Rated Current (Irms) will cause the coil temperature rise approximately  $\Delta T$  of 40°C Max.
- (f) Power Rating: 15W


### 6. Electrical Characteristics

Inductance (µH) ±10%	Test Frequency	DCR (mΩ) Max	Irms (mA) Max	
6.3	1V/100kHz	25.0	10000	

NOTE: Specifications subject to change without notice. Please check our website for latest information.

### 7. Soldering Specification

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for wave soldering.



# **Application Notice**

#### 1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Recommended products should be used within 12 months from the time of delivery.
- (b) The packaging material should be kept where no chlorine or sulfur exists in the air.

#### Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.