


## 1. Part No. Expression

**HWI453232 - 2R2KF**

(a)                      (b)                      (c) (d)(e)

- a) Series Code
- b) Dimension Code
- c) Inductance Code
- d) Tolerance Code
- e) Packaging Code

## 2. Configuration & Dimensions: (Unit:- mm)

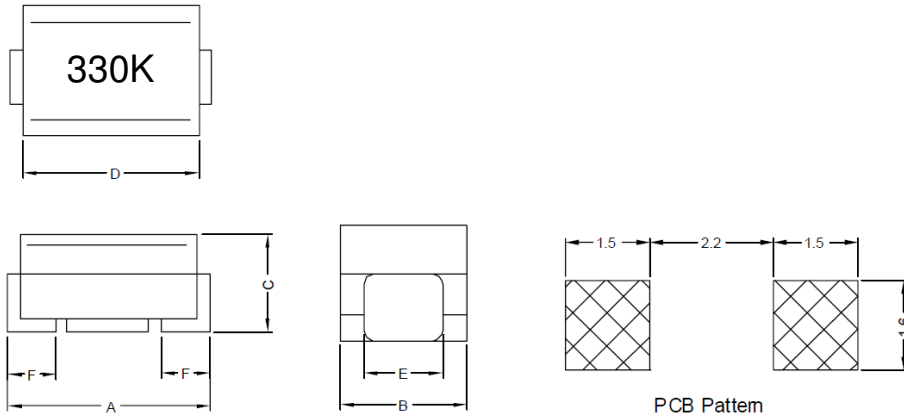


A	B	C	D	E	F
4.5±0.3	3.2±0.2	3.2±0.2	4.2±0.2	1.2±0.2	1.0±0.2

## 3. Schematic



## 4. Material List

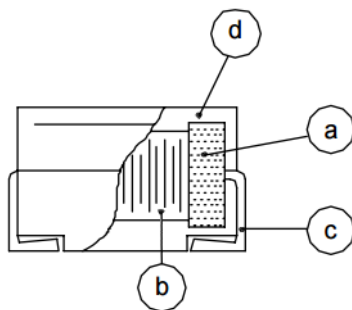

- (a) Core
- (b) Wire
- (c) Terminal
- (d) Capsulate

NOTE: Specifications subject to change without notice. Please check our website for latest information.

## 5. General Specifications

- a) Operating Temp. : -40°C to +125°C
- b) Storage Temp. : -40°C to +125°C
- c) Rated Current will cause the inductance drop within 10%

## 6. Electrical Characteristics

Part No	Inductance (uH)	Tolerance	Q Min	Test Frequency (MHz)	SRF (MHz) Min	DCR (Ω) Max	IDC (mA) Max
HWI453232-1R0□F	1.00	K	10	7.96	180	0.11	1050
HWI453232-1R2□F	1.20	K	10	7.96	160	0.12	1000
HWI453232-1R5□F	1.50	K	10	7.96	130	0.15	950
HWI453232-1R8□F	1.80	K	10	7.96	100	0.16	900
HWI453232-2R2□F	2.20	K	10	7.96	80	0.18	850
HWI453232-2R7□F	2.70	K	10	7.96	60	0.20	800
HWI453232-3R3□F	3.30	K	10	7.96	45	0.22	750
HWI453232-3R9□F	3.90	K	10	7.96	40	0.24	700
HWI453232-4R7□F	4.70	K	10	7.96	35	0.27	650
HWI453232-5R6□F	5.60	K	10	7.96	30	0.30	650
HWI453232-6R8□F	6.80	K	10	7.96	28	0.35	600
HWI453232-8R2□F	8.20	K	10	7.96	25	0.40	600
HWI453232-100□F	10.0	K	10	2.52	22	0.50	550
HWI453232-120□F	12.0	K	10	2.52	21	0.60	500
HWI453232-150□F	15.0	K	10	2.52	20	0.70	450
HWI453232-180□F	18.0	J	10	2.52	19	0.80	400
HWI453232-220□F	22.0	K	10	2.52	18	0.90	370
HWI453232-270□F	27.0	K	10	2.52	16	1.20	330
HWI453232-330□F	33.0	K	10	2.52	14	1.40	300
HWI453232-390□F	39.0	K	10	2.52	12	1.60	280
HWI453232-470□F	47.0	K	10	2.52	11.5	1.90	260
HWI453232-560□F	56.0	K	10	2.52	11	2.20	240
HWI453232-680□F	68.0	K	10	2.52	10	2.60	220
HWI453232-820□F	82.0	K	10	2.52	9.0	3.50	200
HWI453232-101□F	100	K	20	0.796	8.0	4.00	180
HWI453232-121□F	120	K	20	0.796	7.5	4.50	160

Tolerance: J = ± 5%; K = ± 10%

NOTE: Specifications subject to change without notice. Please check our website for latest information.




Part No	Inductance (uH)	Tolerance	Q Min	Test Frequency (MHz)	SRF (MHz) Min	DCR (Ω) Max	IDC (mA) Max
HWI453232-151□F	150	K	20	0.796	7.0	6.50	140
HWI453232-181□F	180	K	20	0.796	6.5	7.50	120
HWI453232-221□F	220	K	20	0.796	5.5	9.00	120
HWI453232-271□F	270	K	20	0.796	5.0	11.00	100
HWI453232-331□F	330	K	20	0.796	4.0	13.00	90
HWI453232-391□F	390	K	20	0.796	3.0	14.00	85
HWI453232-471□F	470	K	20	0.796	3.0	16.00	75
HWI453232-561□F	560	K	20	0.796	3.0	21.00	70
HWI453232-681□F	680	K	20	0.796	2.5	24.20	65

Tolerance: J = ± 5%; K = ± 10%

## 7. Soldering and Mounting

Reflow Soldering Profile

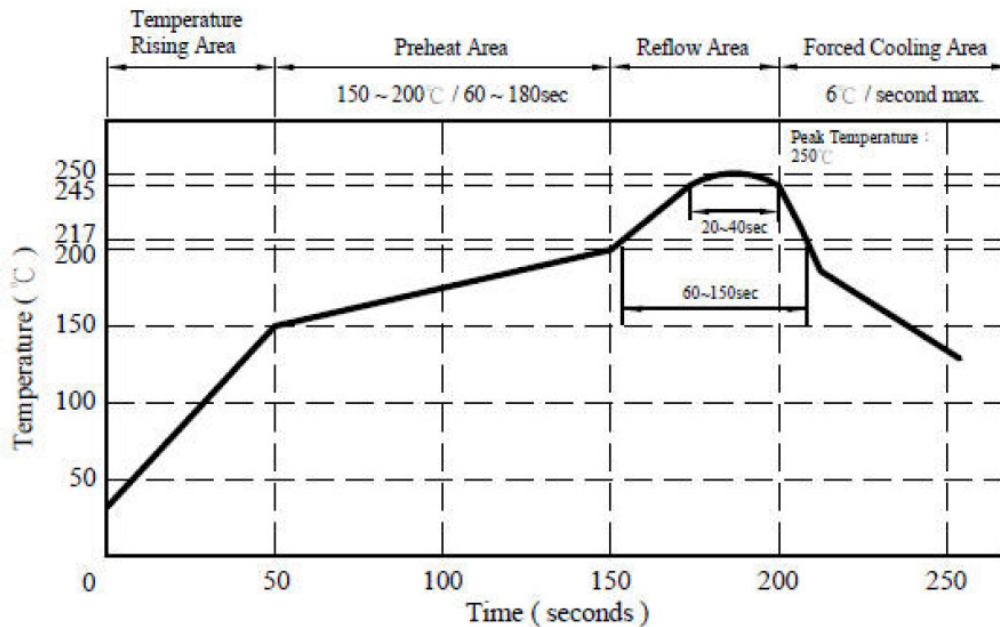


NOTE: Specifications subject to change without notice. Please check our website for latest information.




8. Packaging Information

8-1 Reel Dimension

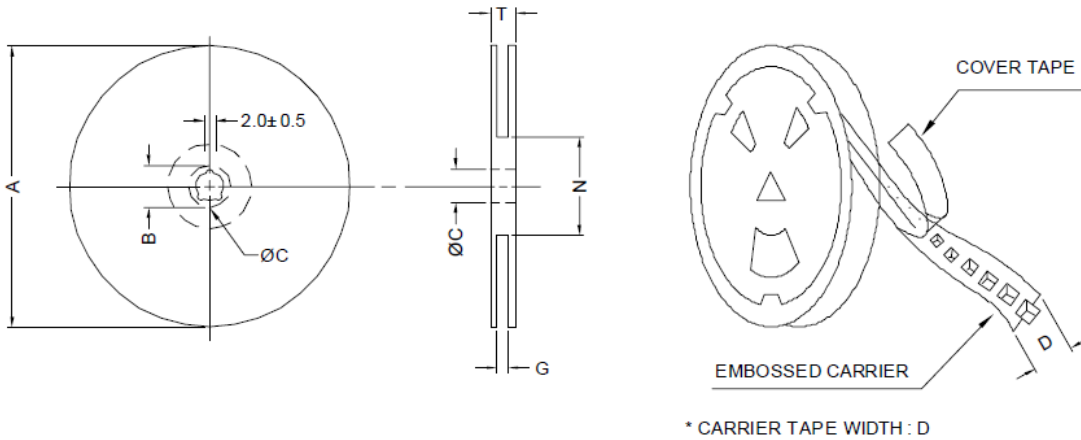

A(mm)	B(mm)	C(mm)	D(mm)	G(mm)	N(mm)	T(mm)
178	21±0.8	13	12	14 Max.	50 Min.	16.5

8-2 Tape Dimension

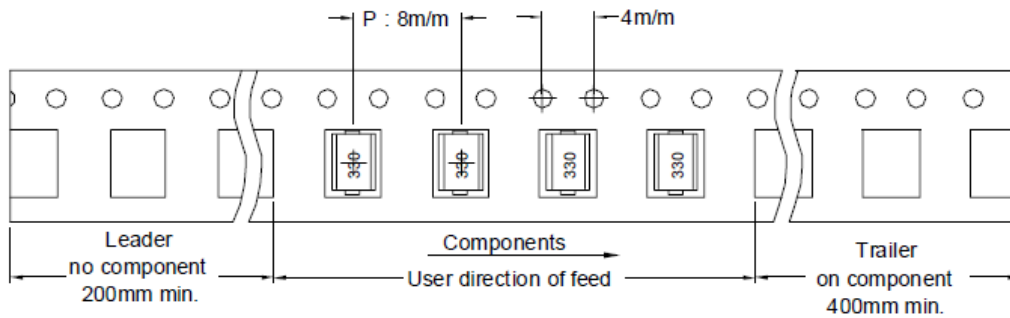

\*There is no differentiation or directions of polarity (marking) in the packaging method.

8-3 Packaging Quantity

Chip Size	HWI453232
Chip/Reel	500 Pcs
Carton (410*390*220mm)	20,000 Pcs

NOTE: Specifications subject to change without notice. Please check our website for latest information.