


1. Part No. Expression

PIC0512HPR10YF

(a) (b) (c) (d) (e) (f)

- | | |
|--------------------|---------------------|
| (a) Series Code | (d) Inductance Code |
| (b) Dimension Code | (e) Tolerance Code |
| (c) Material Code | (f) Packaging Code |

2. Configuration & Dimensions (Unit: mm)

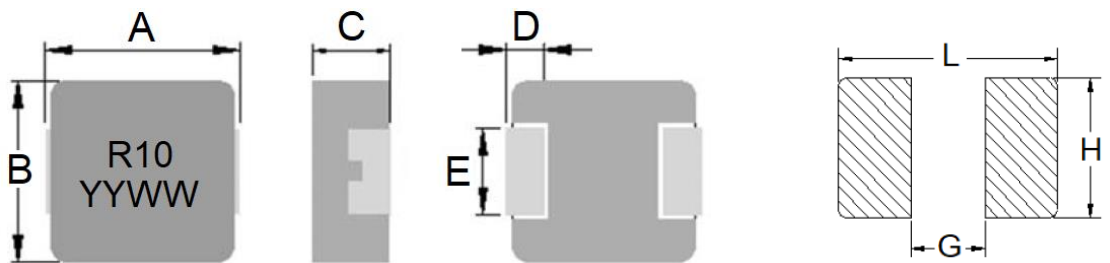


Recommended PCB Layout

- Note:
1. The above PCB layout reference only.
 2. Recommend solder paste thickness at 0.12 mm and above.
 3. Marking: Top= Inductance Code, Bottom=YYWW (Year/World week), Black


| A | B | C | D | E | L | G | H |
|---------|---------|---------|---------|---------|---------|---------|---------|
| 5.7±0.3 | 5.2±0.2 | 1.0±0.2 | 1.1±0.3 | 2.5±0.3 | 6.2 Ref | 2.2 Ref | 2.8 Ref |

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic



4. Material List

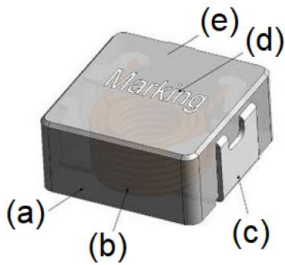

| NO | Items |
|-----|-------|
| (a) | Core |
| (b) | Wire |
| (c) | Clip |
| (d) | Ink |
| (e) | Paint |

5. General Specifications

- (a) Operating Temp.: - 40°C to + 125°C (including self-temperature rise)
- (b) Storage Temp.: - 40°C to + 125°C (on board)
- (c) All test data referenced to 25°C ambient.
- (d) Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.
- (e) Saturation Current (Isat) will cause inductance L0 to drop approximately 30%.
- (f) Rated DC Current: The lower value of Irms and Isat.
- (g) Part Temperature (Ambient + Temp. Rise): Should not exceed 125°C under worst case operating conditions.
- (h) Maximum Operating Voltage: 50V
- (i) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Electrical Characteristics


| Part Number | Inductance (μ H) @0A | Test Frequency | I _{rms} (A) Typ | I _{sat} (A) Typ | DCR (m Ω) | |
|----------------|------------------------------|-------------------|--------------------------------|--------------------------------|----------------------|------|
| | | | | | Typ | Max |
| PIC0512HPR10YF | 0.10 | 1.0V/100KHz | 14.0 | 14.5 | 4.3 | 5.2 |
| PIC0512HPR22YF | 0.22 | 1.0V/100KHz | 10.7 | 14.0 | 5.5 | 6.7 |
| PIC0512HPR33MF | 0.33 | 1.0V/100KHz | 8.5 | 13.5 | 7.8 | 9.4 |
| PIC0512HPR36MF | 0.36 | 1.0V/100KHz | 8.0 | 13.0 | 10.0 | 11.5 |
| PIC0512HPR47MF | 0.47 | 1.0V/100KHz | 7.0 | 11.0 | 13.6 | 15.8 |
| PIC0512HPR68MF | 0.68 | 1.0V/100KHz | 6.0 | 9.0 | 21.5 | 24.5 |
| PIC0512HP1R0MF | 1.00 | 1.0V/100KHz | 5.0 | 6.0 | 26.0 | 30.0 |
| PIC0512HP1R2MF | 1.20 | 1.0V/100KHz | 4.5 | 5.5 | 33.0 | 40.0 |
| PIC0512HP1R5MF | 1.50 | 1.0V/100KHz | 4.0 | 5.0 | 38.0 | 44.0 |
| PIC0512HP2R2MF | 2.20 | 1.0V/100KHz | 3.5 | 4.0 | 65.0 | 75.0 |
| PIC0512HP3R3MF | 3.30 | 1.0V/100KHz | 3.0 | 3.8 | 75.0 | 86.0 |
| PIC0512HP4R7MF | 4.70 | 1.0V/100KHz | 2.5 | 3.2 | 100 | 115 |
| PIC0512HP5R6MF | 5.60 | 1.0V/100KHz | 2.4 | 3.2 | 175 | 201 |
| PIC0512HP6R8MF | 6.80 | 1.0V/100KHz | 2.0 | 3.0 | 193 | 222 |
| PIC0512HP8R2MF | 8.20 | 1.0V/100KHz | 1.7 | 2.8 | 327 | 378 |
| PIC0512HP100MF | 10.0 | 1.0V/100KHz | 1.5 | 1.8 | 335 | 385 |

Tolerance Code: M = \pm 20%, Y = \pm 30%


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curve


PIC0512HPR10YF

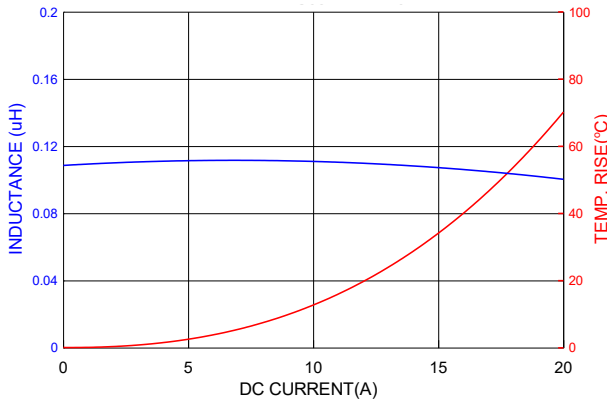


PIC0512HPR22YF

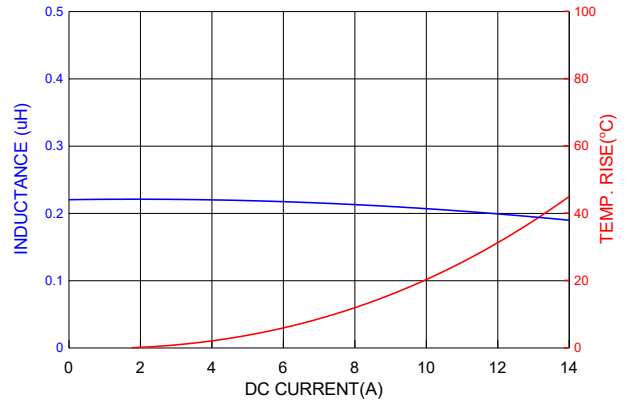


PIC0512HPR33MF

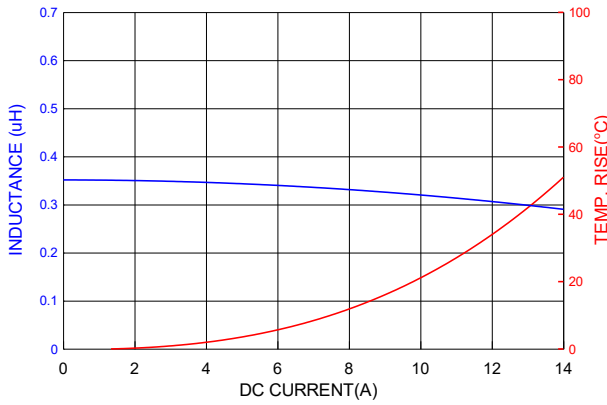


PIC0512HPR36MF

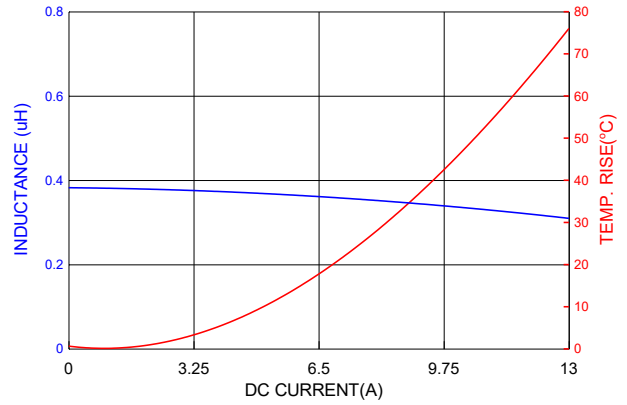

PIC0512HPR47MF

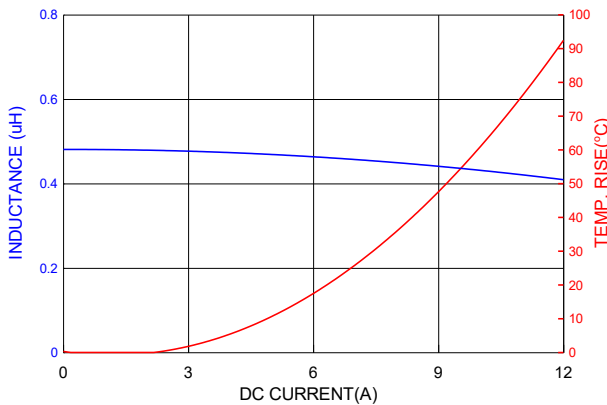


PIC0512HPR68MF

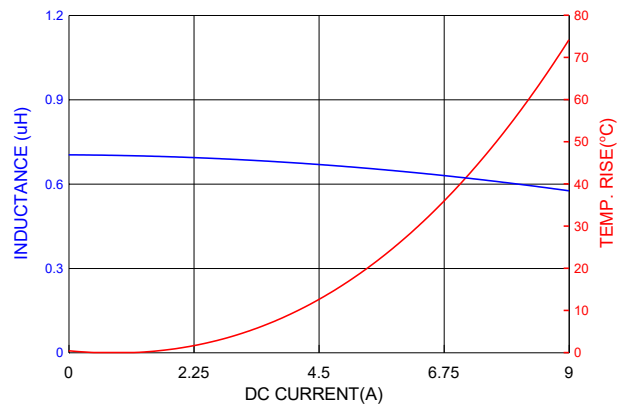


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC0512HP1R0MF

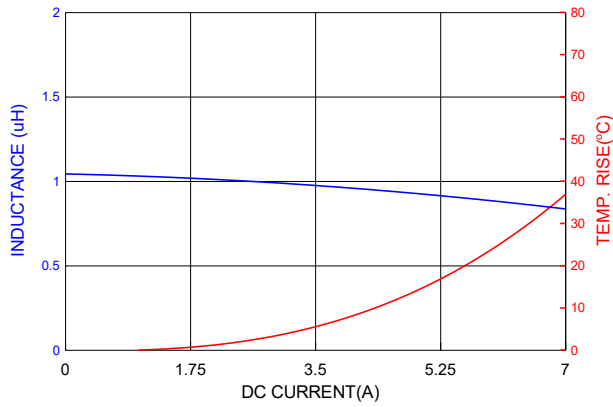


PIC0512HP1R2MF

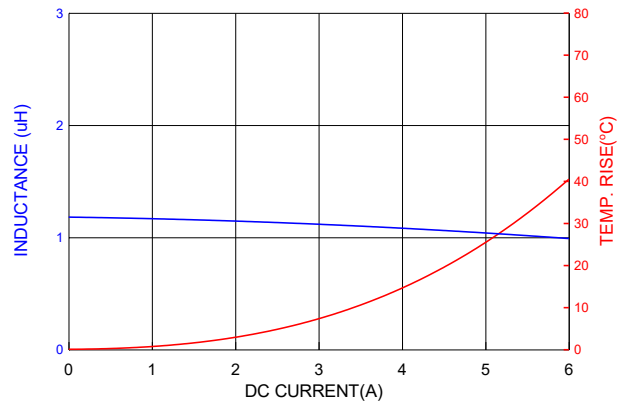


PIC0512HP1R5MF

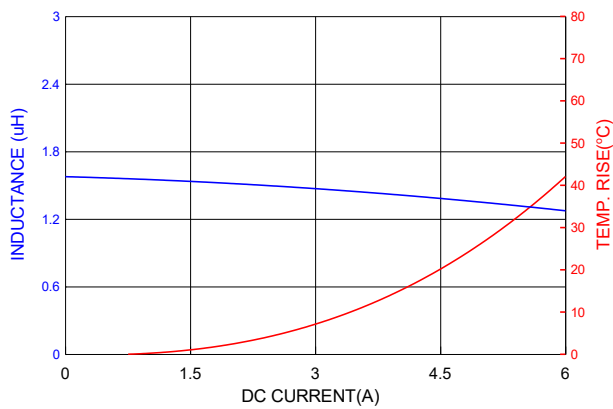


PIC0512HP2R2MF

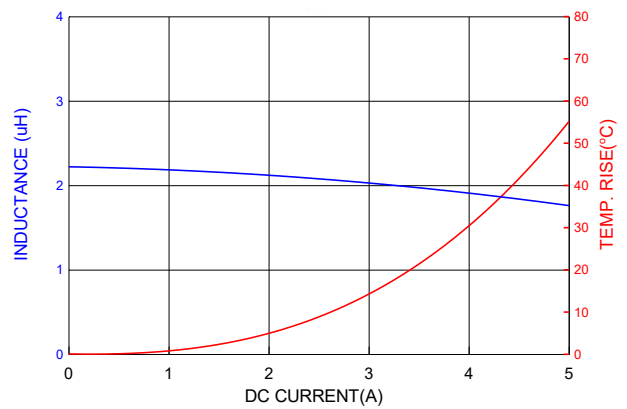

PIC0512HP3R3MF

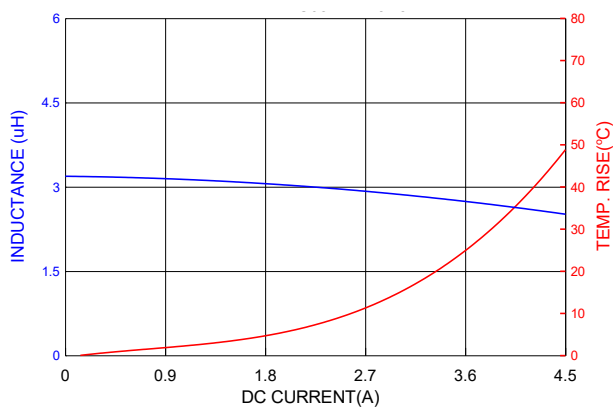


PIC0512HP4R7MF

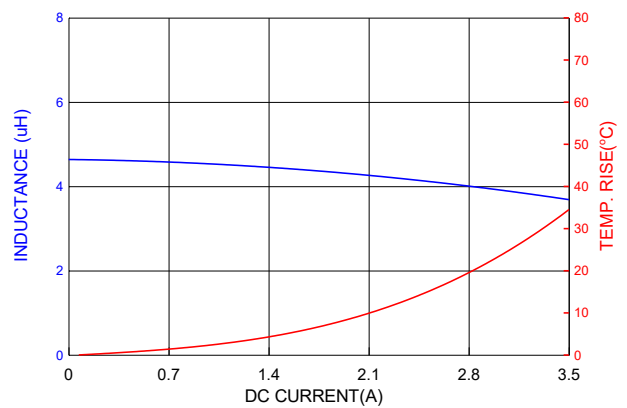


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC0512HP5R6MF

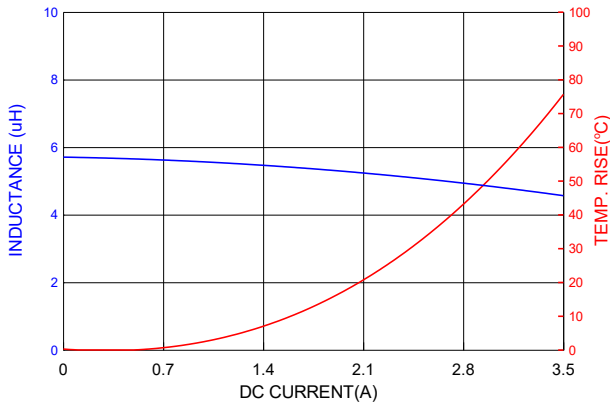


PIC0512HP6R8MF

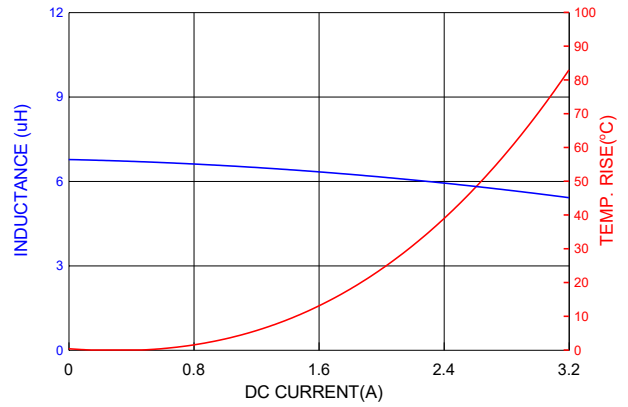

PIC0512HP8R2MF

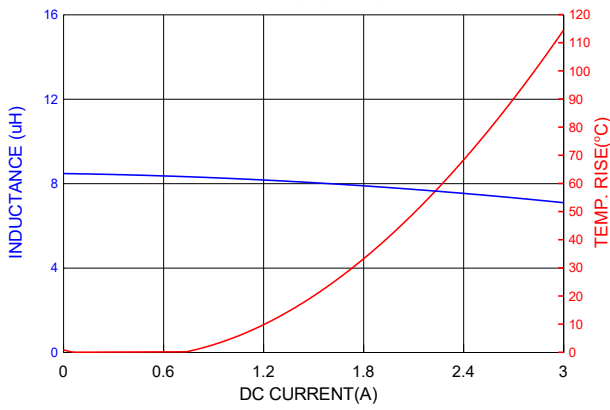

PIC0512HP100MF

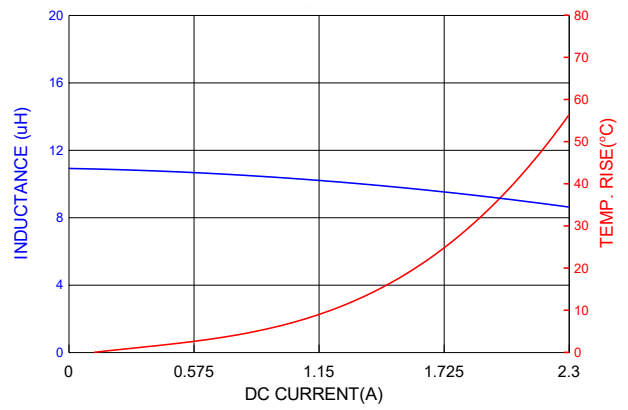

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

8-2. Iron Reflow

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- (a) Preheat circuit and products to 150°C.
- (b) 350°C tip temperature (Max.)
- (c) Never contact the ceramic with the iron tip
- (d) 1.0mm tip diameter (Max.)
- (e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- (f) Limit soldering time to 4~5 sec.

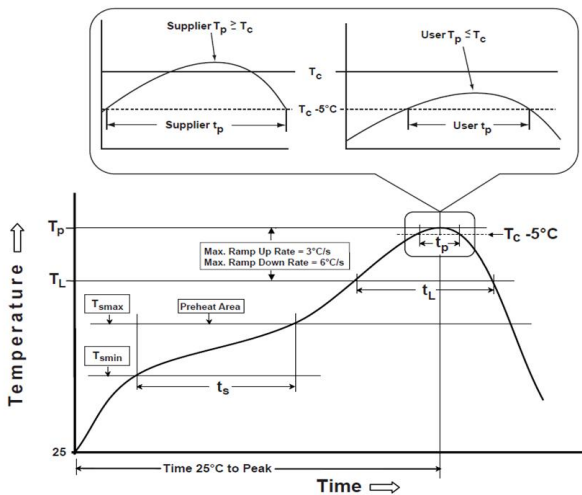

Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

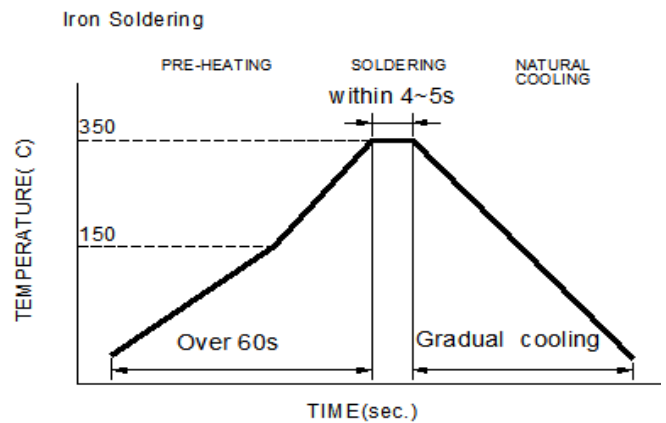

Iron Soldering times : 1 times max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

| | |
|--|------------------|
| Profile Type: | Pb-Free Assembly |
| Preheat | |
| -Temperature Min (T_{smin}) | 150°C |
| -Temperature Max (T_{smax}) | 200°C |
| -Time (t_s) from (T_{smin} to T_{smax}) | 60-120seconds |
| Ramp-up rate (T_L to T_p) | 3°C /second max. |
| Liquids temperature (T_L) | 217°C |
| Time (t_L) maintained above T_L | 60-150 seconds |
| Classification temperature (T_c) | See Table (1.2) |
| Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .) | < 30 seconds |
| Ramp-down rate (T_p to T_L) | 6°C /second max. |
| Time 25°C to peak temperature | 8 minutes max. |

T_p: maximum peak package body temperature, **T_c**: the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c**.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


| | Package Thickness | Volume mm ³ <350 | Volume mm ³ 350-2000 | Volume mm ³ >2000 |
|------------------|-------------------|-----------------------------|---------------------------------|------------------------------|
| PB-Free Assembly | <1.6mm | 260°C | 260°C | 260°C |
| | 1.6-2.5mm | 260°C | 250°C | 245°C |
| | ≥2.5mm | 250°C | 245°C | 245°C |

Reflow is referred to standard IPC/JEDEC J-STD-020F.

8-3. Soldering Volume

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below.


Minimum fillet height = soldering thickness + 25% product height.

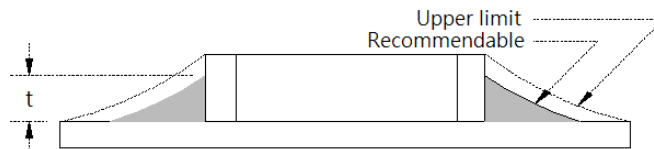

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

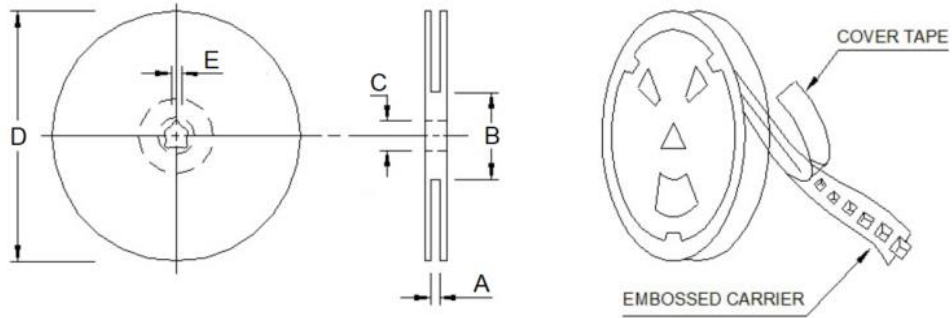

| Type | A | B | C | D | E |
|----------|----------|-----------|----------|-----------|---------|
| 13"x12mm | 12.4 Ref | 100.0 Ref | 13.0 Ref | 330.0 Ref | 2.0 Ref |

9-2. Tape Dimension (Unit: mm)

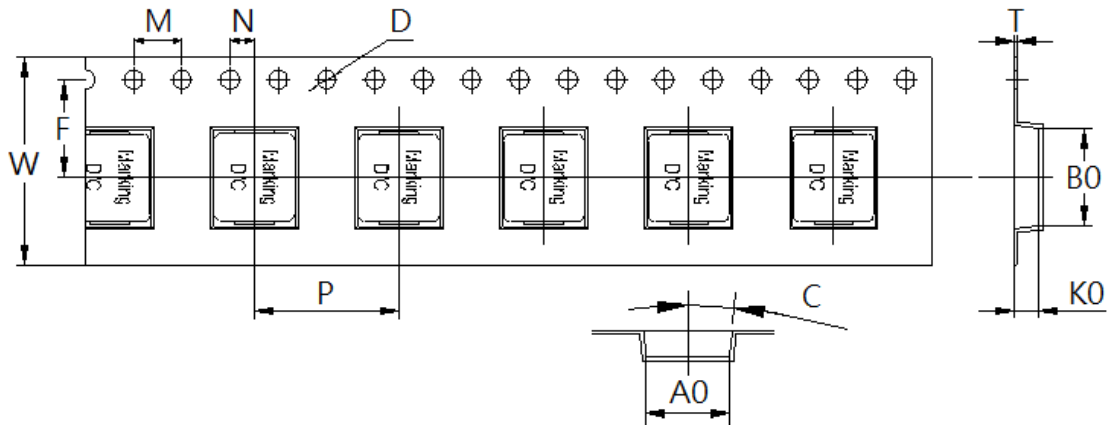


| | | | | | |
|-----------|-----------|-----------|-----------|------------|-----------|
| B0 | A0 | K0 | P | W | F |
| 6.20±0.10 | 5.50±0.10 | 1.50±0.10 | 8.00±0.10 | 12.00±0.30 | 5.50±0.10 |
| T | D | M | N | C | - |
| 0.35±0.05 | 1.50±0.10 | 4.00 Ref | 2.00 Ref | 3° | - |

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Quantity (Unit: Pcs)

| | |
|------------|--------|
| Chip/ Reel | 4,000 |
| Inner box | 8,000 |
| Carton | 32,000 |

9-4. Tearing Off Force

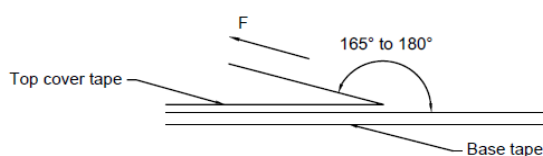

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

| Room Temp. (°C) | Room Humidity (%) | Room atm (hPa) | Tearing Speed (mm/min) |
|-----------------|-------------------|----------------|------------------------|
| 5~35 | 45~85 | 860~1060 | 300±10 |

| Tape Size | 8 mm | 12 to 56 mm | 72 mm or Wider |
|---------------------------|--------|-------------|----------------|
| Tearing Off Force (grams) | 10~100 | 10~130 | 10~150 |

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.