


1. Part No. Expression

Z Q 1 P Z 1 0 0 - R P - 1 0

(a) (b) (c) (d) (e) (f) (g)

- | | |
|--------------------|--------------------|
| (a) Series Code | (e) Packaging Code |
| (b) Dimension Code | (f) Current Code |
| (c) Material Code | (g) Internal Code |
| (d) Impedance Code | |

2. Configuration & Dimensions (Unit: mm)

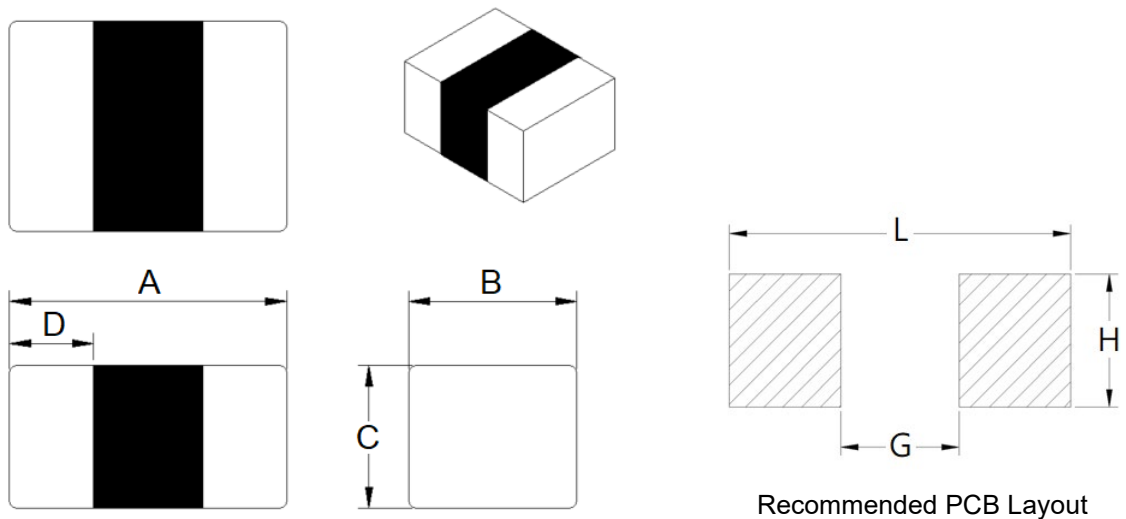

A	B	C	D	L	G	H
1.00±0.10	0.50±0.10	0.50±0.10	0.25±0.10	1.40 Ref	0.40 Ref	0.60 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. General Specifications







- (a) Reliability test for this part meets AEC-Q200 standard.
- (b) Operating Temp.: -55°C to +150°C (including self-temperature rise)
- (c) Storage Temp.: -55°C to +150°C (on board)
- (d) All test data referenced to 25°C ambient.
- (e) Irms: Based on temperature rise ΔT 20°C Max at rated current < 1A and ΔT 40°C Max at rated current $\geq 1A$
- (f) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

4. Electrical Characteristics

Part Number	Impedance (Ω) $\pm 25\%$	Test Frequency	DCR (Ω) Max	Rated Current (mA) Max
ZQ1PZ100-RP-10	10	60mV/100MHz	0.018	4000
ZQ1PZ300-RN-10	30	60mV/100MHz	0.022	3000
ZQ1PZ600-RM-10	60	60mV/100MHz	0.032	2500
ZQ1PZ800-RM-10	80	60mV/100MHz	0.038	2300
ZQ1PZ121-RL-10	120	60mV/100MHz	0.050	2000
ZQ1PZ221-RK-10	220	60mV/100MHz	0.095	1500
ZQ1PZ301-RK-10	300	60mV/100MHz	0.150	1200
ZQ1PZ471-RK-10	470	60mV/100MHz	0.180	1100
ZQ1PZ601-RJ-10	600	60mV/100MHz	0.200	1000


NOTE: Specifications subject to change without notice. Please check our website for latest information.

5. Characteristics Curve

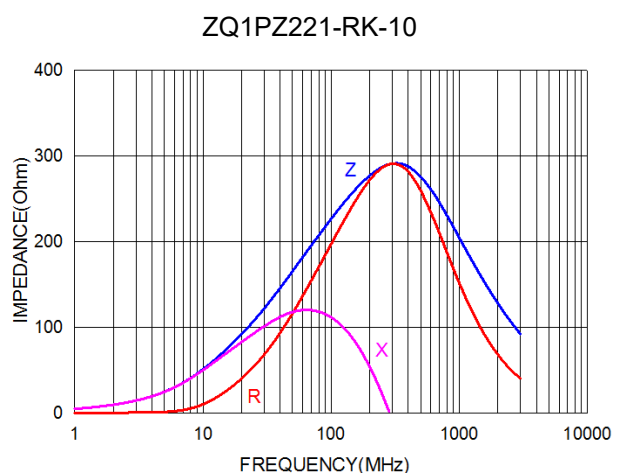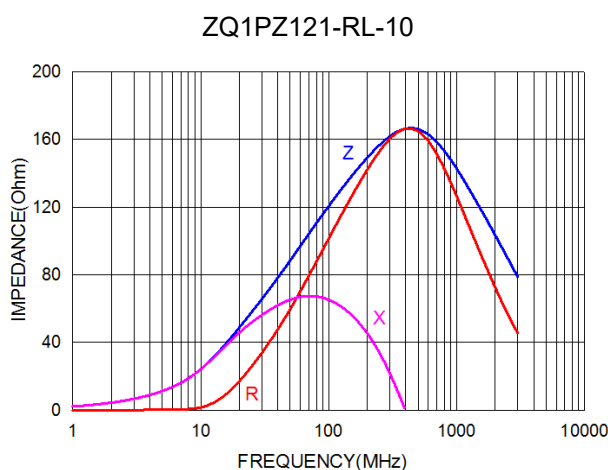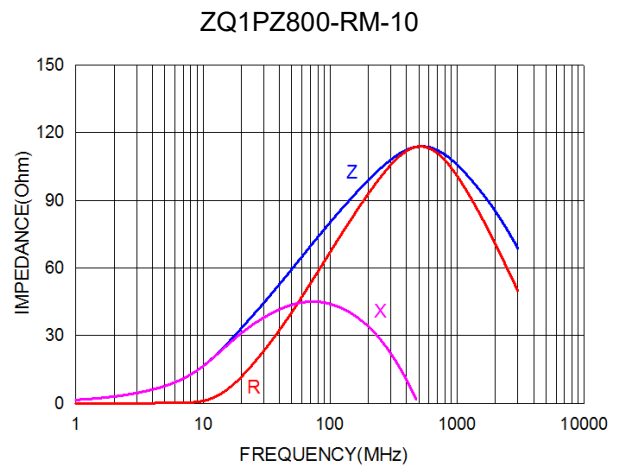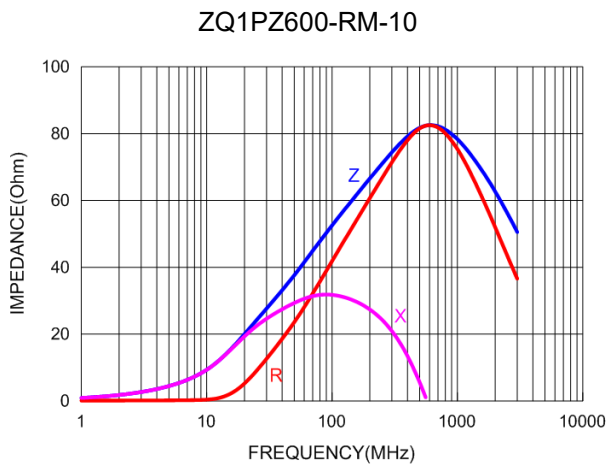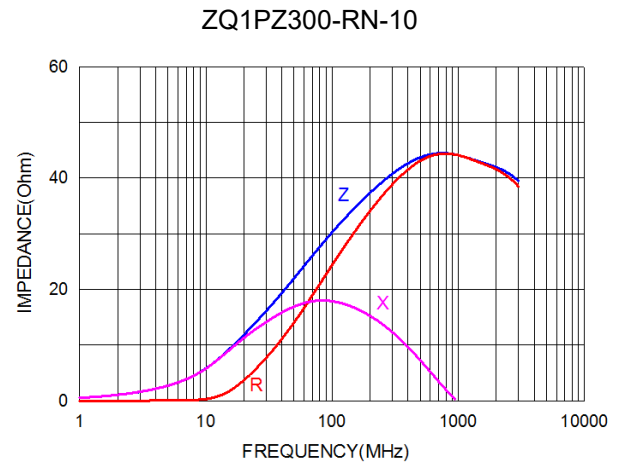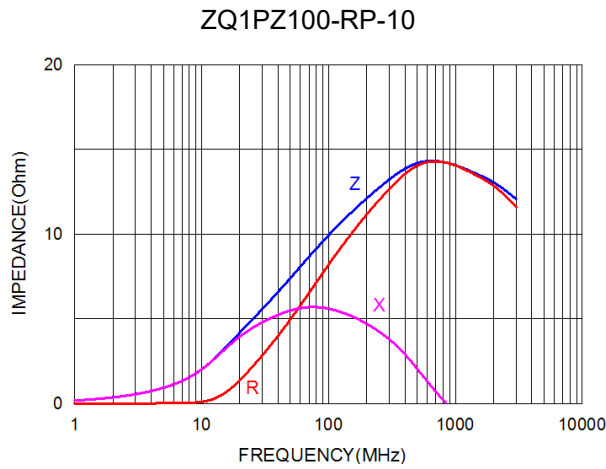


NOTE: Specifications subject to change without notice. Please check our website for latest information.


ZQ1PZ301-RK-10

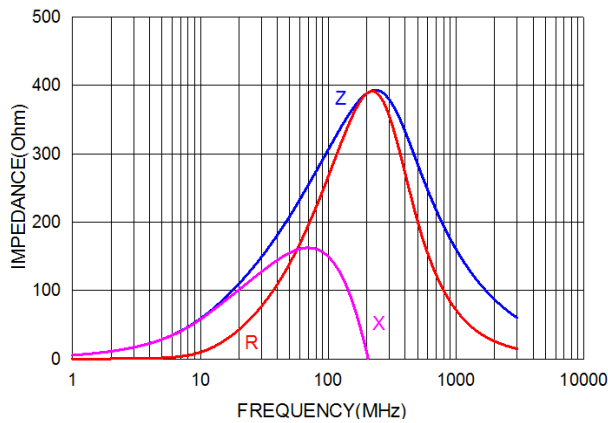

ZQ1PZ471-RK-10

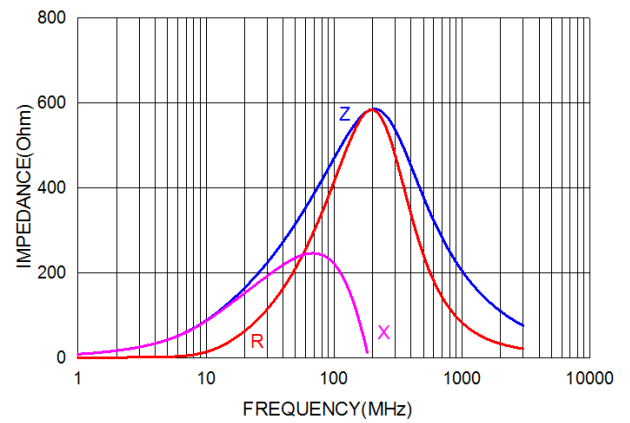

ZQ1PZ601-RJ-10

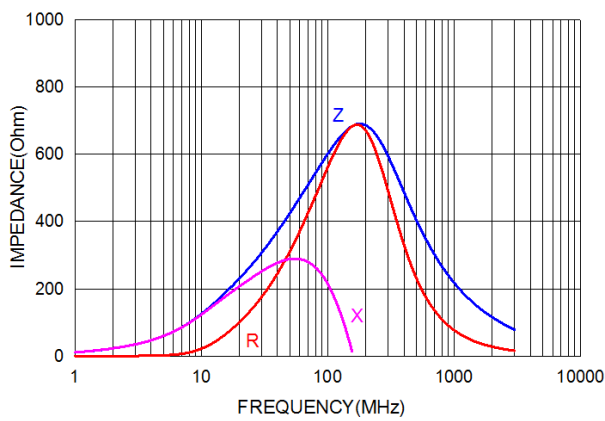

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

6-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020F).

6-2. Iron Reflow

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- Preheat circuit and products to 150°C.
- 350°C tip temperature (Max.)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (Max.)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 sec.

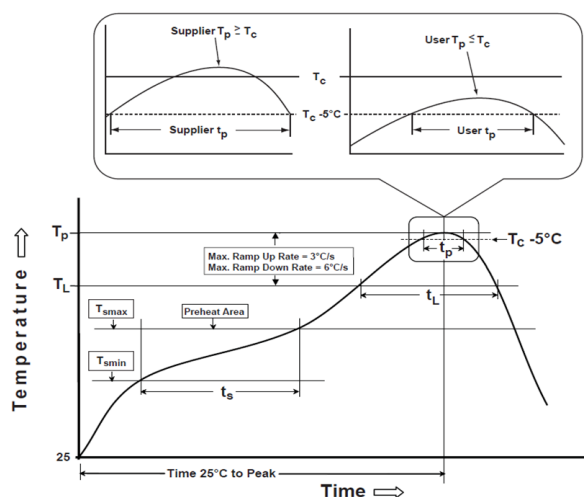

Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

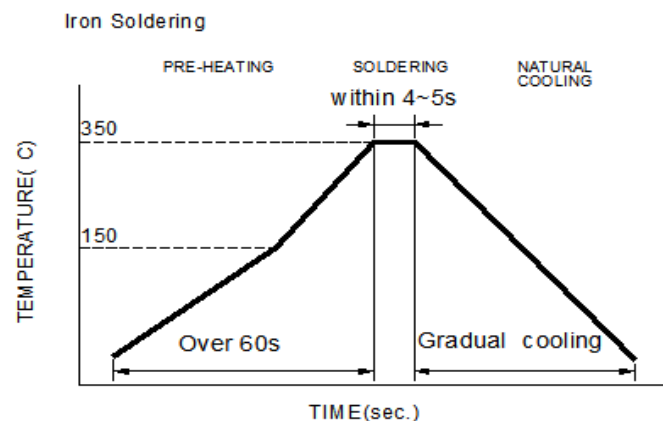

Iron Soldering times : 1 times max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	< 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p : maximum peak package body temperature, **T_c** : the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c** .

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

6-3. Soldering Volume

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in the Figure below.


Minimum fillet height = soldering thickness + 25% product height.

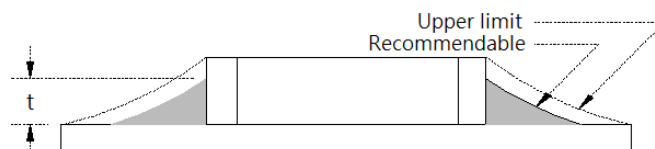

NOTE: Specifications subject to change without notice. Please check our website for latest information.


7. Packaging Information

7-1. Reel Dimension (Unit: mm)

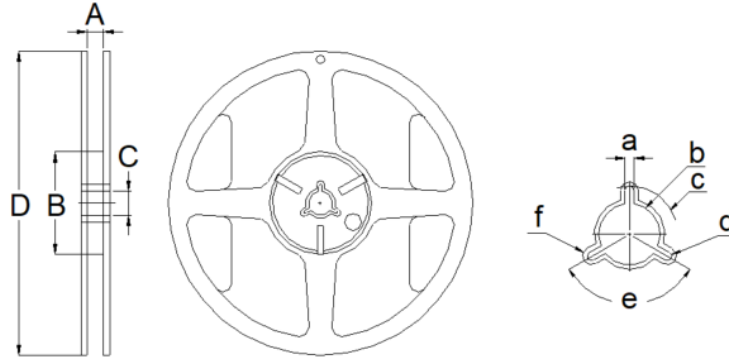

Type	A	B	C	D	a
	9.0 Ref	60.0 Ref	13.5 Ref	178.0 Ref	2.0 Ref
7"x8mm	b	c	d	e	f
	13.5 Ref	R10.5	R0.5	120°	R1.9

7-2. Tape Dimension (Unit: mm)

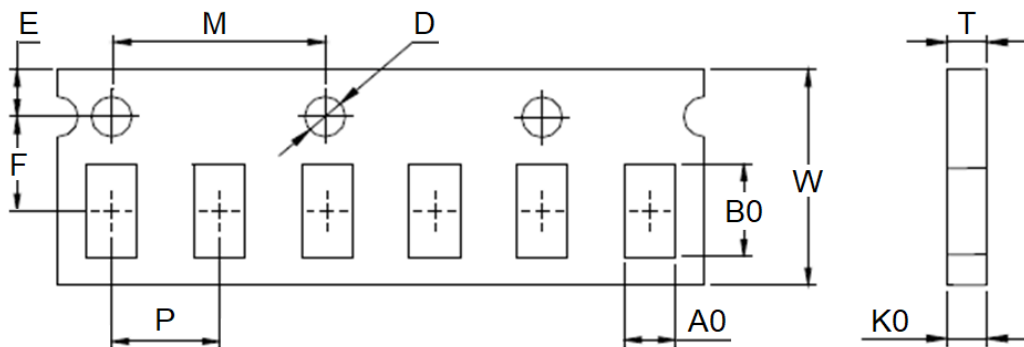


F	E	M	D	W
3.50±0.05	1.75±0.10	4.00±0.10	1.50+0.10/-0.00	8.00±0.30
B0	A0	K0	P	T
1.12±0.03	0.62±0.03	0.60±0.03	2.00±0.05	0.60±0.03

NOTE: Specifications subject to change without notice. Please check our website for latest information.

7-3. Packaging Quantity (Unit: Pcs)

Chip/ Reel	10,000
Inner Box	50,000
Middle Box	250,000
Carton	500,000

7-4. Tearing Off Force

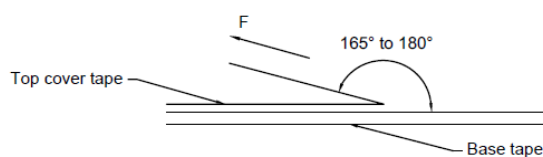

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
- (b) Recommended products should be used within 12 months from the time of delivery.
- (c) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.